

ABB BALDOR RELIANCE III

Customer information packet

ECS100T2H5EB4

5HP, 1800RPM, 3PH, 60HZ, 184TC, TEFC, TOP

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
Agency Approvals	UL WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	10.500 A @ 230.0 V
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	10.5 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
Lifting Lugs	Standard Lifting Lugs

Part Detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	36WGA0024
Layout	36LYT263
Eff. date	06-16-2025
CD Diagram	CD0006B03
Poles	04
Leads	3#14 19" LONG LEADS
Proprietary	False
Created date	08-31-2020

Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3632B
Mounting Arrangement	F1
Number of Poles	4
Overall Length	16.71 IN
Power Factor	97
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1800 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Volts	230	Max RPM	4000	Conn Diag.	CD0006B03	Leads	3
Amps	10.5	Max Amps		Cs Diagram	CS1127	BEMF	126
HP	5	VFD#	ECIN2A10P5			LD	13.5
RPM	1800	S.F.	1.00			LQ	47.8
Phase/Hz	3/60	Rating	40C AMB-CONT			Rs	0.8309 Meas. L-L

60034-2-3 Motor Performance at Standardized Operating Points

	RPM	% Speed	LB-FT	% Torque	HP	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1630	90%	14.6	100%	4.5	93.3	6.49%	245
P2	904	50%	14.6	100%	2.5	90.6	5.17%	195
P3	452	25%	14.6	100%	1.3	85.0	4.39%	166
P4	1628	90%	7.3	50%	2.3	93.3	3.24%	122
P5	905	50%	7.3	50%	1.3	91.7	2.26%	85
P6	905	50%	3.7	25%	0.6	91.3	1.19%	45
P7	453	25%	3.6	25%	0.3	88.6	0.80%	30

61800-9-2 PDS Performance at Reference Operating Points


	RPM	% Speed	LB-FT	% Torque	HP	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1810	100%	14.6	100%	5.0	90.8	10.11%	382
P2	904	50%	14.6	100%	2.5	86.0	8.09%	305
P3	301	17%	14.6	100%	0.8	70.7	6.86%	259
P4	1811	100%	7.3	50%	2.5	90.8	5.06%	191
P5	905	50%	7.3	50%	1.3	86.6	3.85%	145
P6	301	17%	7.3	50%	0.4	73.0	3.06%	115
P7	905	50%	3.7	25%	0.6	85.2	2.16%	82
P8	302	17%	3.6	25%	0.2	72.2	1.59%	60

Points not taken in certified order.

BALDOR • RELIANCE	DR By:	R & D	AC MOTOR PERFORMANCE CURVES	36WGA0024 36-0000-0618 Test - 111814
	CK By:	USTOSAN		
	APP By:	USWEQUA1		
	Date:	01/17/2025		

Volts	230	Max RPM	4000	Conn Diag.	CD0006B03	Leads	3
Amps	10.5	Max Amps		Cs Diagram	CS1127	BEMF	126
HP	5	VFD #	ECIN2A10P5			LD	13.5
RPM	1800	S.F.	1.00			LQ	47.8
Phase/Hz	3/60	Rating	40C AMB-CONT			Rs	0.8309 Meas L-L

Constant Duty Operating Range

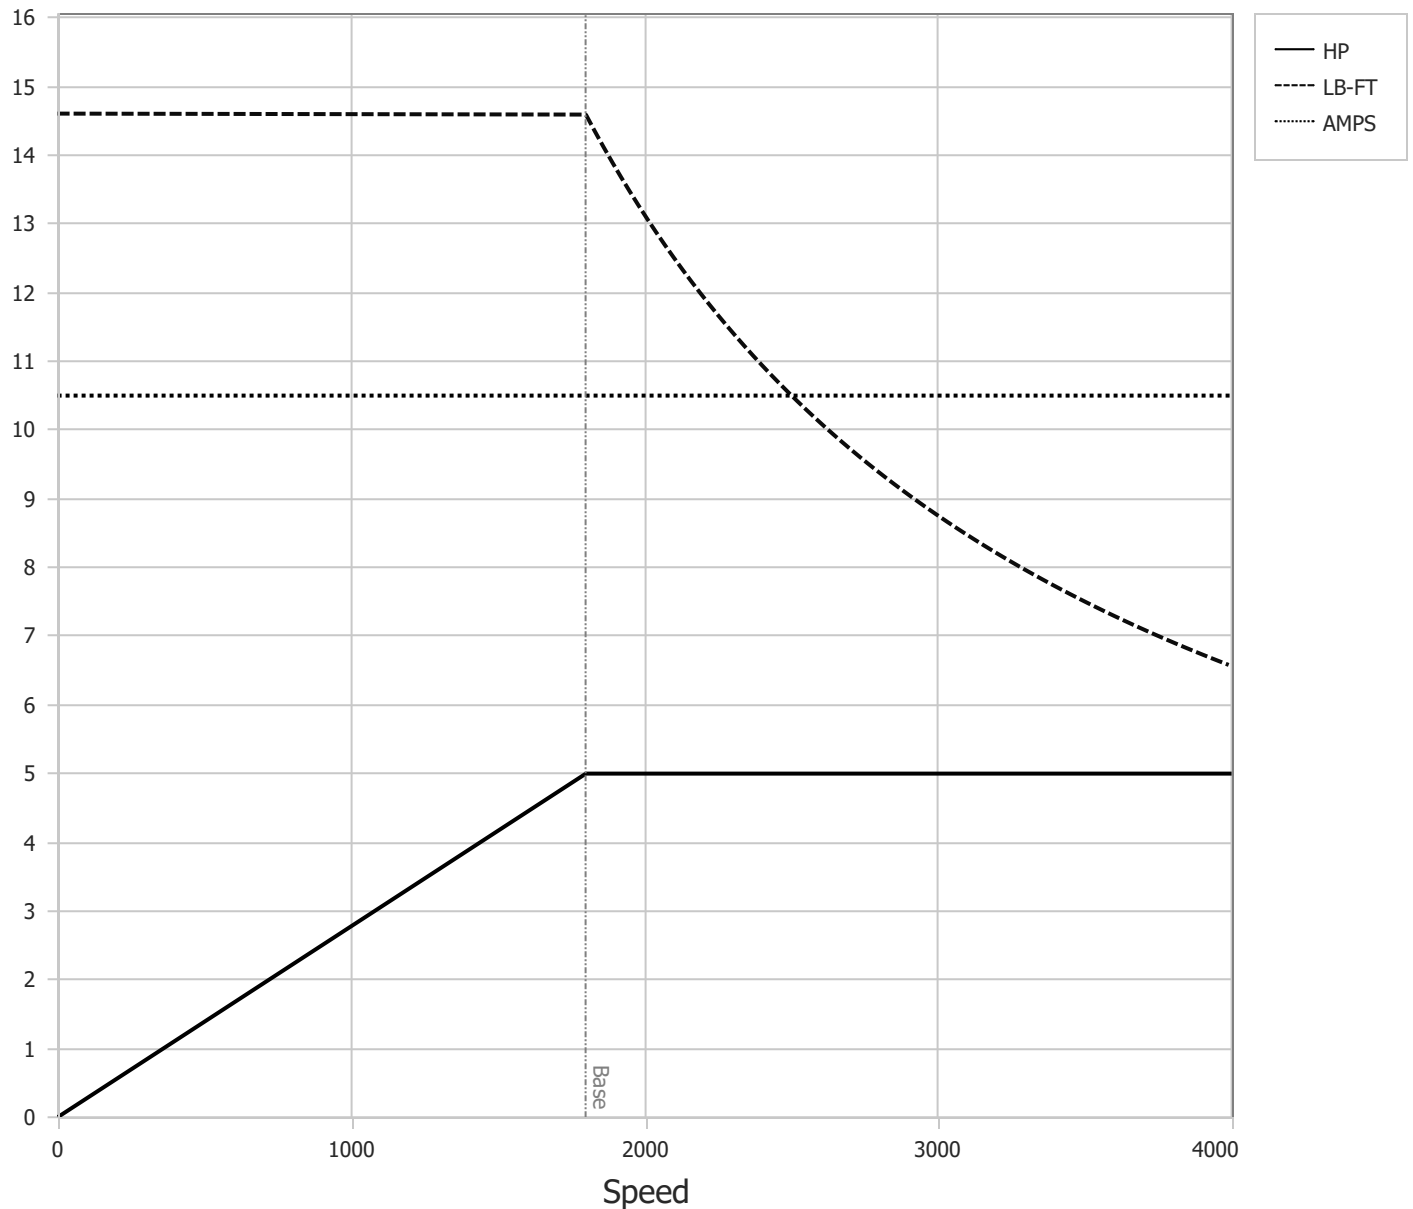


BALDOR • RELIANCE


DR By: R & D
 CK By: USTOSAN
 APP By: USWEQUA1
 Date: 01/17/2025

**AC MOTOR
PERFORMANCE
CURVES**


36WGA0024
 36-0000-0618
 Test - 111814

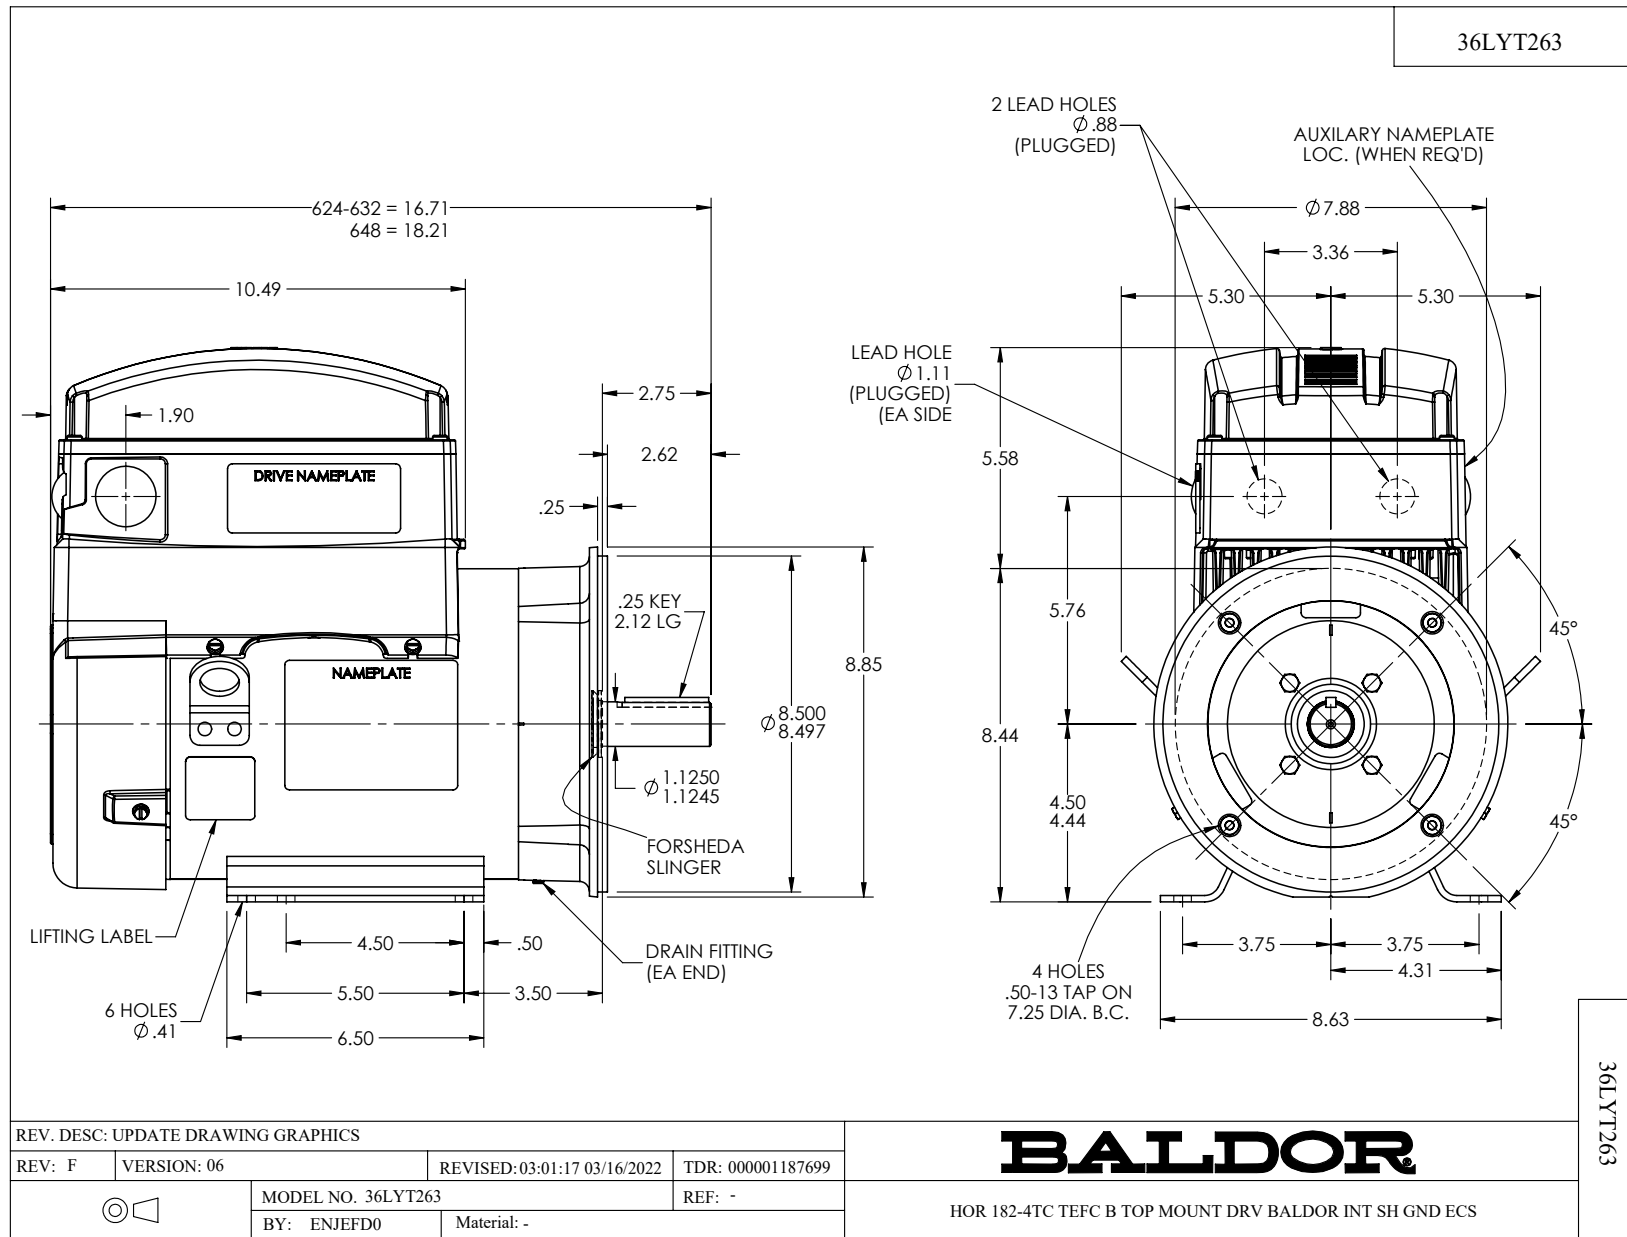

36CB3501A00

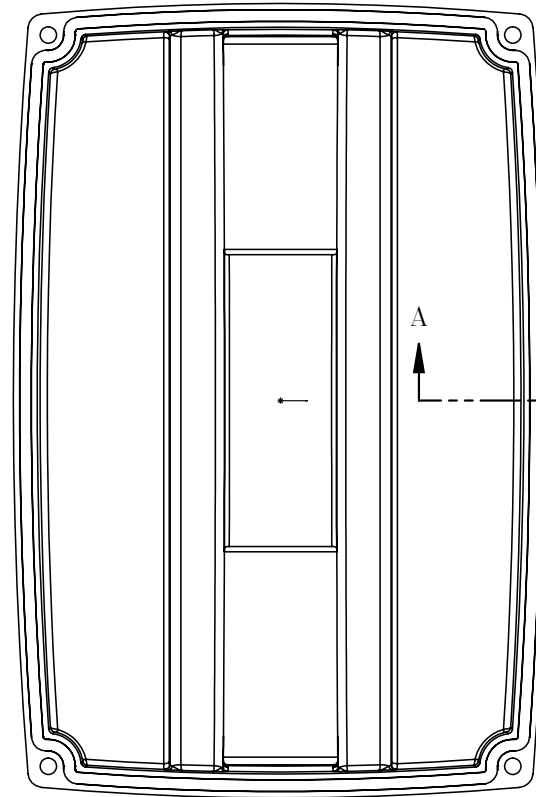

MATERIAL: RAMPF, RAKU-PUR 32-3280-51L

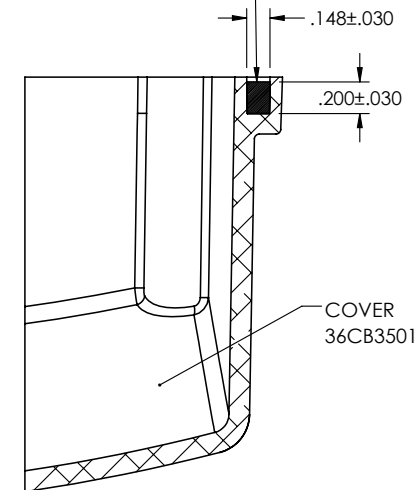

SECTION A-A

REV. DESC: UPDATE MATERIAL

REV: A	VERSION: 01	REVISED: 10:46:37 03/29/2019	TDR: 000001101646
--------	-------------	------------------------------	-------------------



MODEL NO. 36CB3501A00

REF: -

BY: ENMARS0

Material: -

BALDOR - RELIANCE®

36 & 37 FRAME TOP ECM COVER WITH FOAM SEAL

36CB3501A00

