

# ABB BALDOR RELIANCE III

---

## Customer information packet

ECS101A3K4EC4

4KW, 1500RPM, 3PH, 50HZ, D112C, 3632B, TEFC, B1

Class - None

Division - Not Applicable

**Specifications**

<b>Enclosure</b>	TEFC
<b>Frame</b>	D112C
<b>Frame Material</b>	Steel
<b>Frequency</b>	50.00 Hz
<b>Haz Area Class and Group</b>	None
<b>Haz Area Division</b>	Not Applicable
<b>Motor Letter Type</b>	Brushless Wound Field PM Rotor
<b>Output @ Frequency</b>	4.000 KW @ 50 HZ
<b>Phase</b>	3
<b>Synchronous Speed @ Frequency</b>	1500 RPM @ 50 HZ
<b>Voltage @ Frequency</b>	380.0 V @ 50 HZ
<b>Agency Approvals</b>	WEEE UKCA CULUS CE
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	No Mounting
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	None
<b>Constant Torque Speed Range</b>	5
<b>Current @ Voltage</b>	6.800 A @ 380.0 V
<b>Design Code</b>	B
<b>Drip Cover</b>	No Drip Cover
<b>Duty Rating</b>	S1
<b>Efficiency @ 100% Load</b>	91.6 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	NO FEEDBACK
<b>Frame Prefix</b>	D
<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	6.8 a

**Part Detail**

<b>Revision</b>	D
<b>Type</b>	AC
<b>Mech. spec.</b>	
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	36WGA0022
<b>Layout</b>	36LYT526
<b>Eff. date</b>	11-15-2024
<b>CD Diagram</b>	CD0006B03
<b>Poles</b>	04
<b>Leads</b>	3#12 15" LONG LEADS
<b>Proprietary</b>	False
<b>Created date</b>	01-11-2023

<b>Insulation Class</b>	F
<b>Inverter Code</b>	Inverter Duty
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	IEC
<b>Motor Type</b>	3632B
<b>Mounting Arrangement</b>	B14
<b>Number of Poles</b>	4
<b>Overall Length</b>	21.59 IN
<b>Power Factor</b>	97
<b>Product Family</b>	General Purpose
<b>Pulley Face Code</b>	C-Face
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	1.103 IN
<b>Shaft Ground Indicator</b>	Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Speed</b>	1500 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	INVERTER SPECIAL
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP3978A00</b>					
<b>PART NO.</b>	ECIN4A9P5				
<b>U1</b>	400	<b>PH</b>	3	<b>HZ</b>	50
<b>I1</b>	8	<b>W/EXT. CHOKE</b>			6.8
<b>SERIAL #</b>					

**NP3968B01A01**

<b>CAT.NO.</b>	ECS101A3K4EC4										
<b>SPEC.</b>	36-0000-3651					<b>YR</b>					
<b>FRAME</b>	D112C		<b>IP</b>	55		<b>WT.</b>	97				
<b>KW</b>	4	<b>HZ</b>	50		<b>PH</b>	3	<b>DUTY-IPM</b>	S1			
<b>INS CL</b>	F	<b>CLASS RISE</b>					<b>AMB-C</b>	40			
<b>EFF. CL</b>	IE5	<b>EFF</b>	91.6		<b>COSφ</b>	97					
<b>VOLTS</b>	380			<b>FLA</b>	6.8						
<b>1/MIN</b>	1500				<b>1/MIN MAX</b>	3000					
<b>BEMF (V)</b>	210				<b>RS (OHMS)</b>	3.3					
<b>LD (MH)</b>	54			<b>LQ (MH)</b>	191						
<b>VPWM</b>	<b>CP =</b>		50		<b>TO</b>	100					
<b>CT</b>	5	<b>TO</b>	50		<b>VT</b>	1	<b>TO</b>	50			
<b>MATCHED INV</b>	ECIN4A9P5										
<b>DE</b>	6206		<b>ODE</b>	6205							
<b>SERIAL #</b>											

Volts	190/380	Max RPM	3000	Conn Diag.	CD0005A25	Leads	9
Amps	13.6/6.8	Max Amps		Cs Diagram	CS0576	BEMF	105/210
KW	4	VFD#	ACS380-040S-09			LD	13.5/54.0
RPM	1500	S.F.	1.00			LQ	47.8/191.0
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	3.3231 Meas. L-L

**60034-2-3 Motor Performance at Standardized Operating Points**

	RPM	% Speed	LB-FT	% Torque	KW	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1350	90%	18.8	100%	4.8	90.4	9.48%	383
P2	750	50%	18.8	100%	2.7	86.5	7.72%	312
P3	375	25%	18.8	100%	1.3	78.3	6.87%	278
P4	1350	90%	9.4	50%	2.4	92.4	3.67%	149
P5	750	50%	9.4	50%	1.3	89.2	2.98%	121
P6	750	50%	4.7	25%	0.7	89.8	1.40%	57
P7	375	25%	4.7	25%	0.3	84.7	1.12%	45

**61800-9-2 PDS Performance at Reference Operating Points**


	RPM	% Speed	LB-FT	% Torque	KW	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1500	100%	18.8	100%	5.4	87.9	13.58%	549
P2	750	50%	18.8	100%	2.7	84.1	9.35%	378
P3	255	17%	18.8	100%	0.9	67.7	8.02%	324
P4	1500	100%	9.4	50%	2.7	91.1	4.85%	196
P5	750	50%	9.4	50%	1.3	86.1	3.99%	162
P6	255	17%	9.4	50%	0.5	71.8	3.30%	133
P7	750	50%	4.7	25%	0.7	85.2	2.14%	87
P8	255	17%	4.7	25%	0.2	71.1	1.71%	69

Points not taken in certified order.


<b>BALDOR • RELIANCE</b>	DR By:	<u>R &amp; D</u>	<b>AC MOTOR PERFORMANCE CURVES</b>	<b>36WGA0020</b> 36-0000-3634 Test - 112234
	CK By:	<u>USGAHIL</u>		
	APP By:			
	Date:	<u>04/09/2025</u>		

Volts	190/380	Max RPM	3000	Conn Diag.	CD0005A25	Leads	9
Amps	13.6/6.8	Max Amps		Cs Diagram	CS0576	BEMF	105/210
KW	4	VFD #	ACS380-040S-09			LD	13.5/54.0
RPM	1500	S.F.	1.00			LQ	47.8/191.0
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	3.3231 Meas L-L


Constant Duty Operating Range

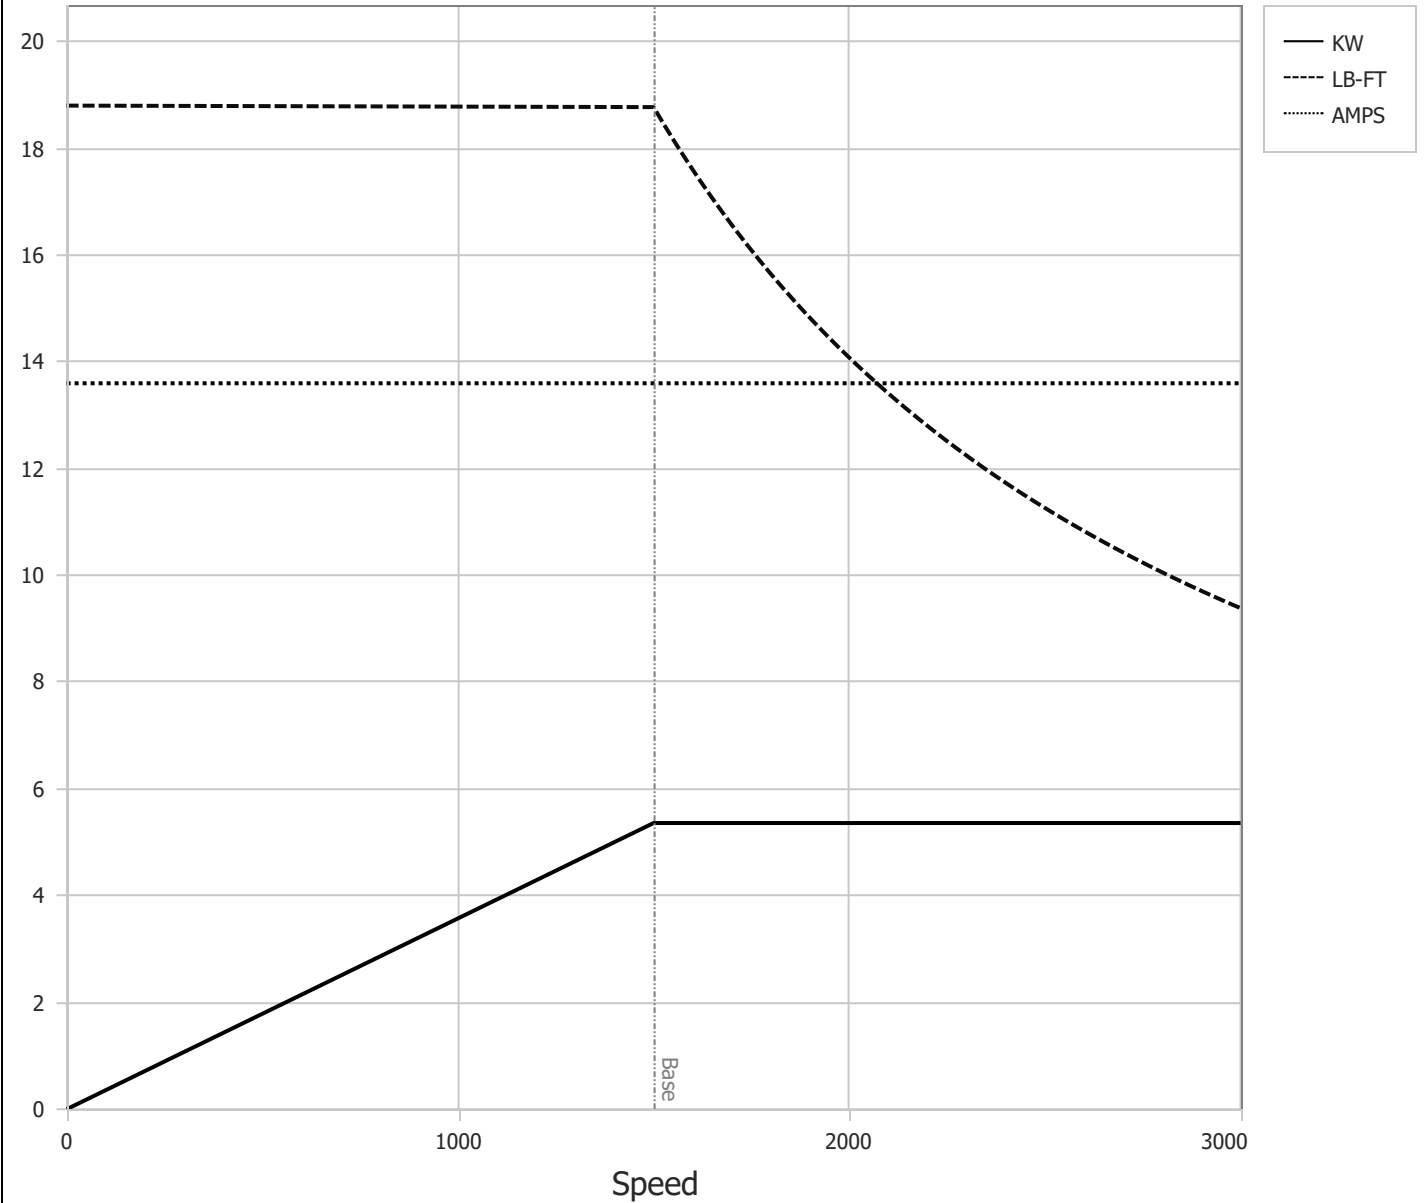


	DR By: <u>R &amp; D</u>	<b>AC MOTOR PERFORMANCE CURVES</b>	<b>36WGA0020</b>
	CK By: <u>USGAHIL</u>		36-0000-3634
	APP By:		<i>Test - 112234</i>
	Date: <u>04/09/2025</u>		

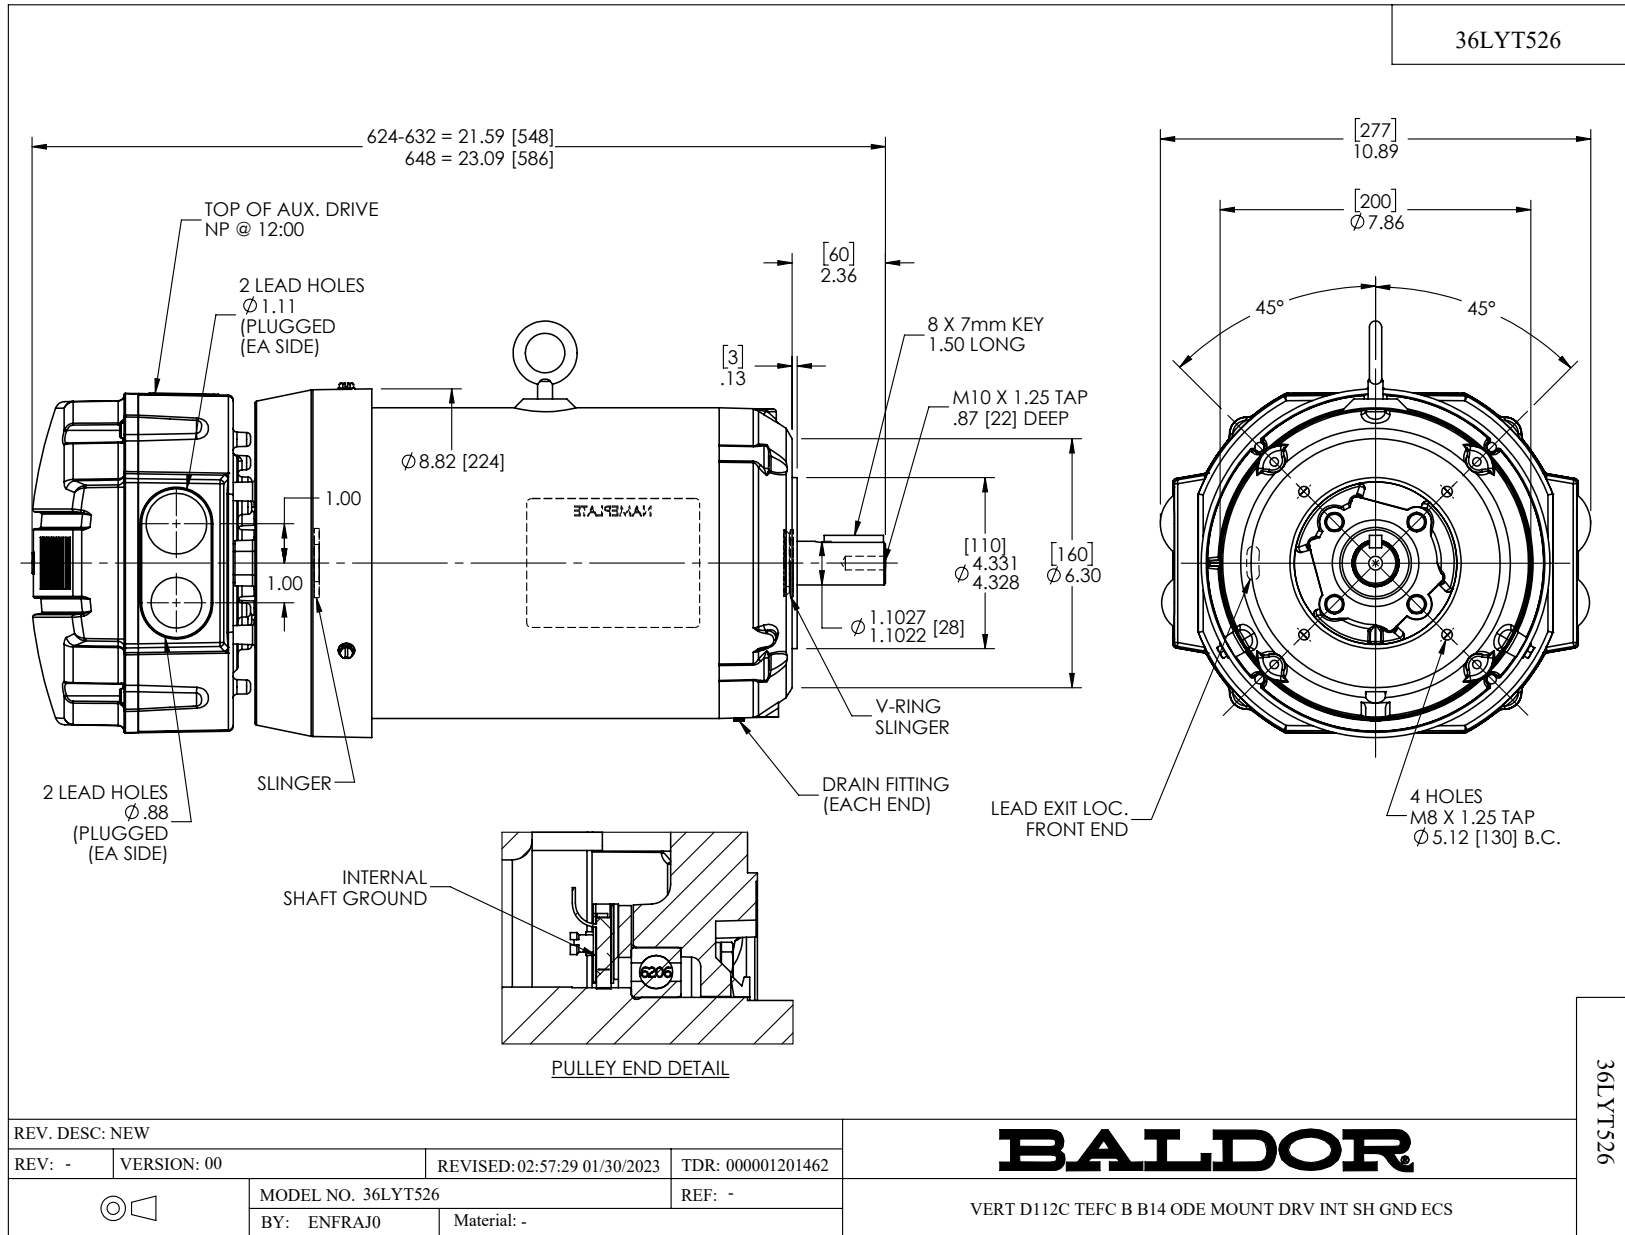

36CB3502A00

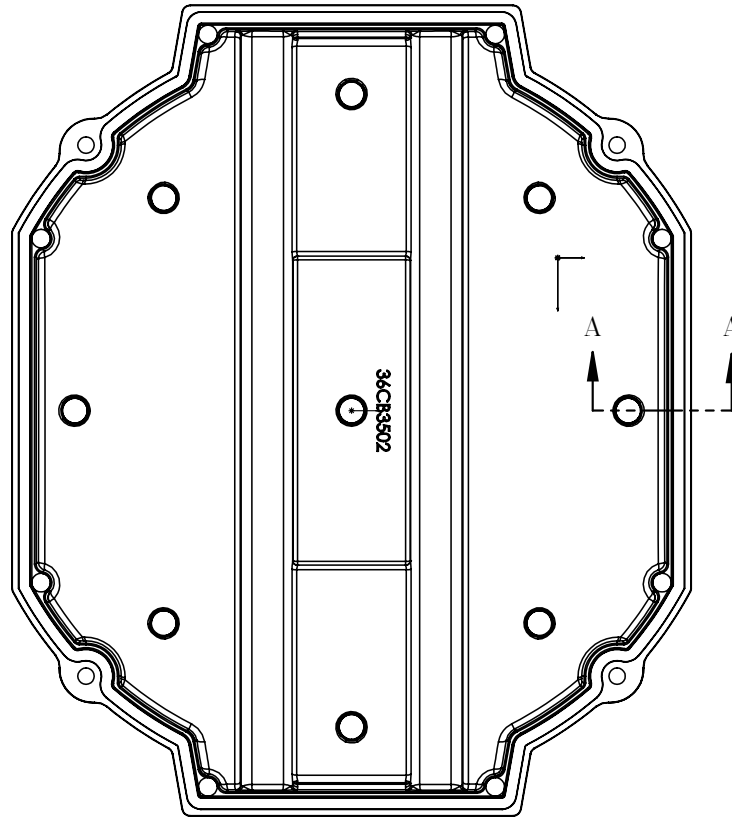

MATERIAL: RAMPF, RAKU-PUR 32-3280-51L

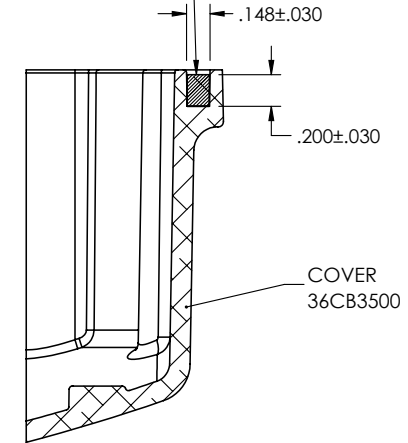

SECTION A-A

36CB3502A00

REV. DESC: NEW


REV: -	VERSION: 00	REVISED: 09:16:43 01/15/2020	TDR: 000001129989
--------	-------------	------------------------------	-------------------




MODEL NO. 36CB3502A00	REF: -
BY: ENMARS0	Material: -

**BALDOR - RELIANCE®**

36 FRAME ODE ECM ALUMINUM COVER WITH FOAM SEAL

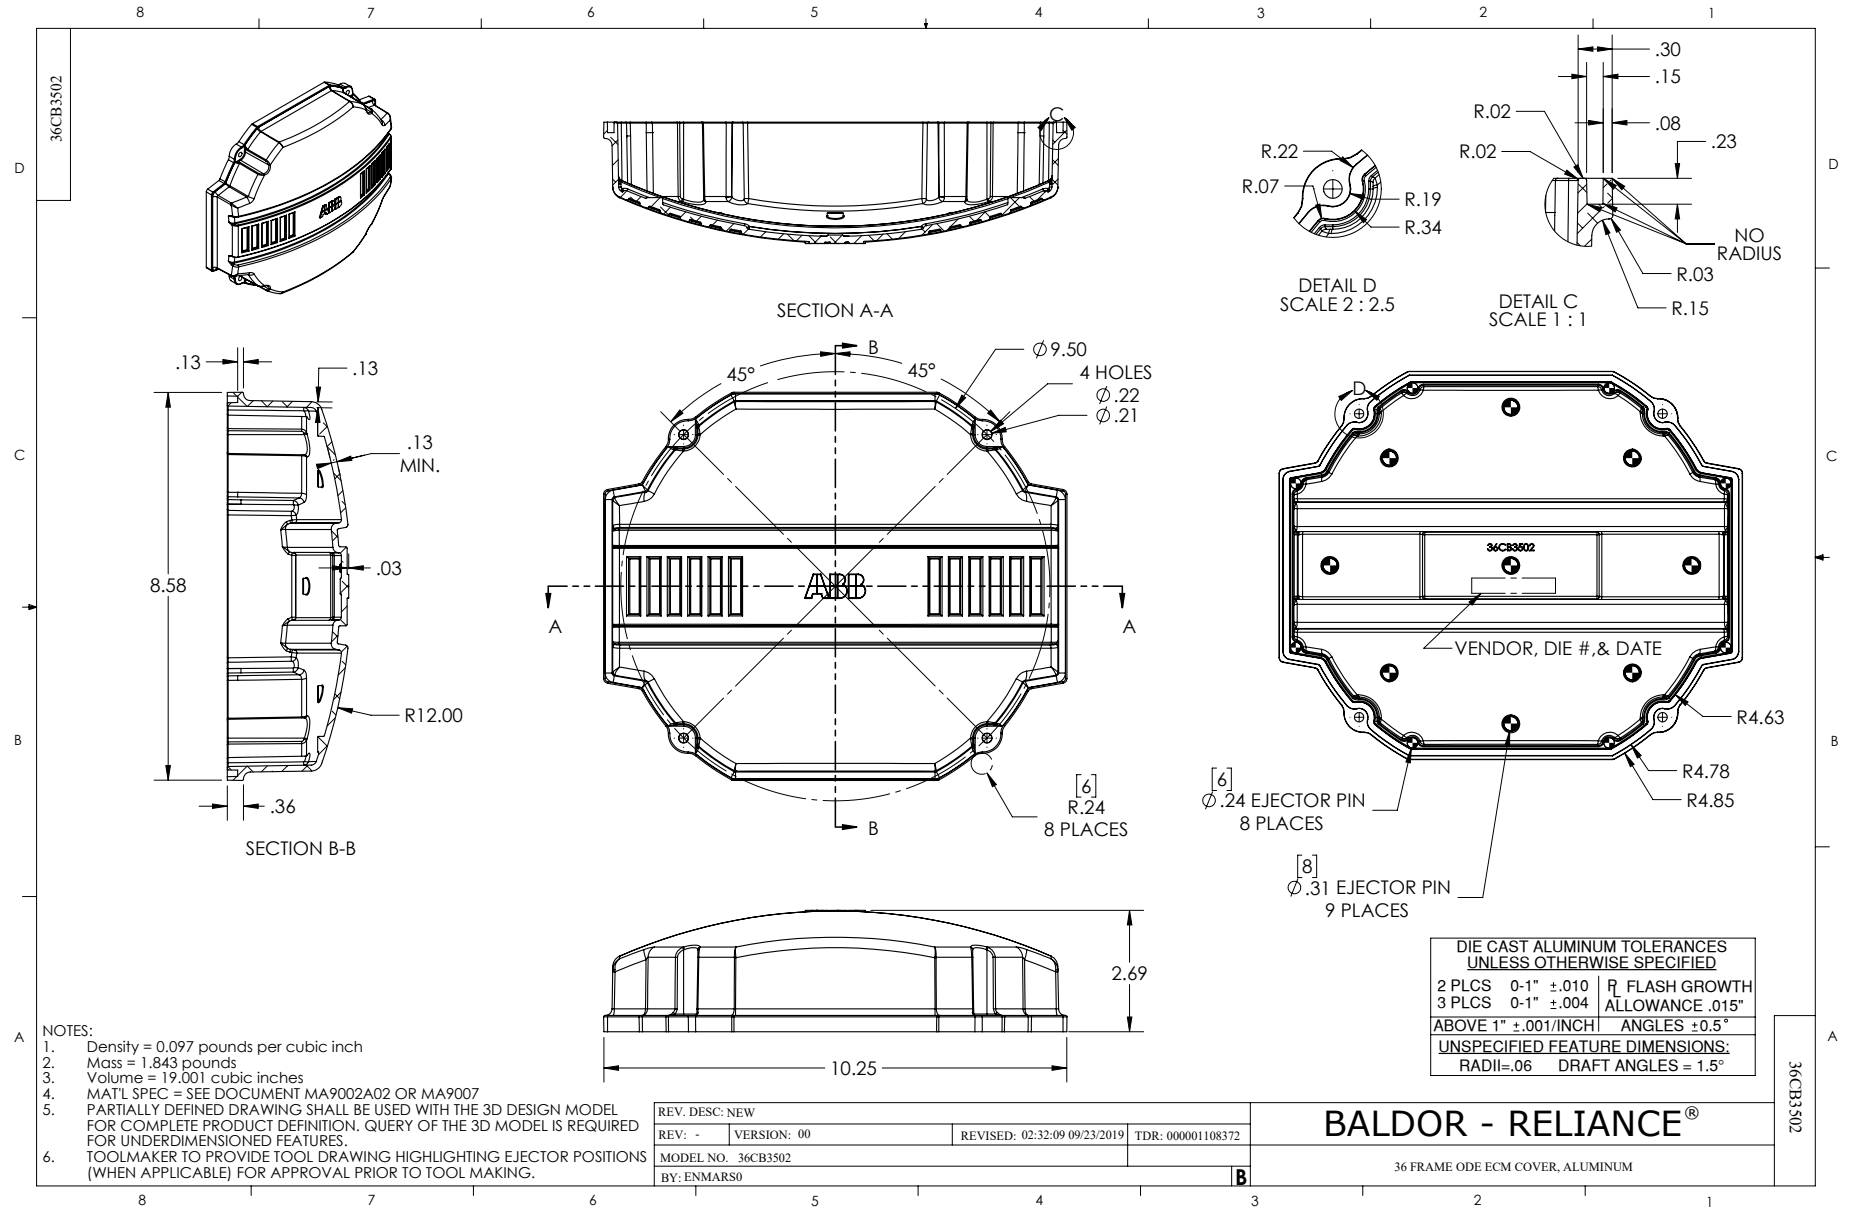

CD0006B03

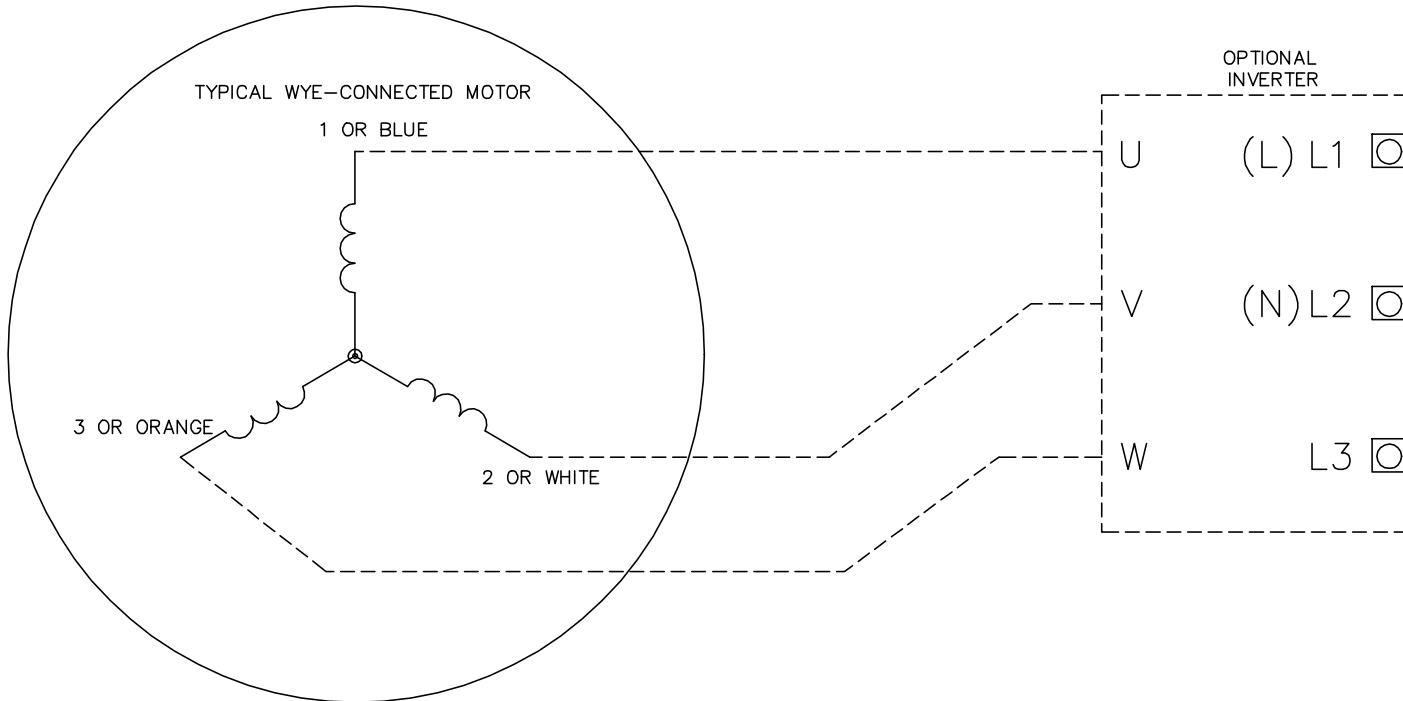

**NOTES:**

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

CD0006B03

REV. DESC: CHANGE LEAD COLORS TO BLUE WHITE ORANGE		
REV. LTR: A	VERSION: 01	TDR: 000001158598
FILE: \AAA\00252\917	REVISED: 11:01:03 01/19/2021	BY: ENMARSO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE CONNECTED, ECS

SH 1 of 1