ABB BALDOR RELIANCE

Customer information packet

ECS101M0H2DF4

2HP, 1800RPM, 3PH, 60HZ, 145T, 3524B, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/13/2026 4:02:47 PM

Specifications

Enclosure	TEFC
Frame	145T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Brushless Wound Field PM Rotor
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	WEEE
	CULUS
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	1.500 A @ 460.0 V
	3.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	F

Part Detail

Revision	D
Type	AC
Mech. spec.	35E6264
Base	
Status	PRD/A
Elec. spec.	35WGG983
Layout	35LYE6264
Eff. date	02-12-2026
CD Diagram	CD0005A25
Poles	04
Leads	9#16 Y
Proprietary	False
Created date	03-15-2024

Inverter Code	Inverter Duty
KVA Code	N
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3524B
Mounting Arrangement	F1
Number of Poles	4
Overall Length	13.29 IN
Power Factor	93
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	Y
Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1800 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None


BALDOR·RELIANCE

EC-Titanium™

CAT. NO.	ECS101M0H2DF4						
SPEC.	35E6264G983				YR	***	
FRAME	145T		ENCL.	TEFC	IP	54	
HP	2	RATING	40C AMB-CONT				
NOM. EFF.	91.9	PF	93	SF	1.50		
VOLTS	230/460		FLA	4.4/2.2			
RPM	1800	RPM MAX	4000				
HZ	60	PH.	3	CLASS	F		
BEMF (V)	148/296		Rs (Ω)	2.9/11.7			
Ld (mH)	19.7/78.9		Lq (mH)	101.5/406			
INV TYP	VPWM	CHP	60 TO 133 HZ				
	CT	6 TO 60 HZ	VT	6 TO 60 HZ			
MATCHED INV	ACS380-04XX-04A8-1 / 02A6-4						
BEARING	DE	6205	ODE	6203			
SERIAL#	***						

ELECTRIC MOTOR FOR INDUSTRIAL USE

FERRITE ASSISTED
SYNCHRONOUS RELUCTANCE MOTOR
FOR INVERTER USE ONLY

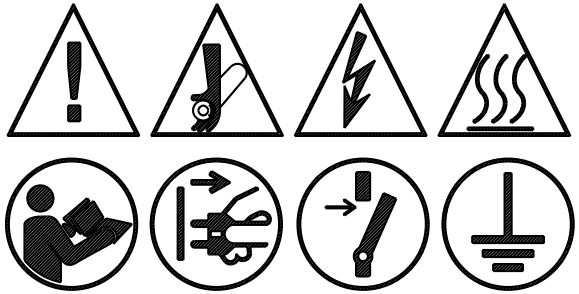

PERMANENT MAGNET MOTOR. WHEN SHAFT IS ROTATED, VOLTAGE WILL BE GENERATED AT THE MOTOR TERMINALS.
MOTEUR Á AIMANT PERMANENT. LORSQUE L'ARBRE TOURNE, UNE TENSION SERA GÉNÉRÉE AUX BORNES DU MOTEUR.

BALDOR-RELIANCE
SHAFT GROUNDING BRUSH INSTALLED

c UL us LISTED
E46145

ABB MOTORS AND MECHANICAL INC.
5711 R.S. BOREHAM JR. ST., FORT SMITH, AR. MFG IN U.S.A.

Volts	460	Max RPM	4000	Conn Diag.	CD0006B03	Leads	3
Amps	1.75	Max Amps		Cs Diagram	CS1126	BEMF	296
HP	2	VFD#	ECIN4A2P2			LD	78.9
RPM	1800	S.F.	1.00			LQ	406
Phase/Hz	3/60	Rating	50C AMB-CONT			Rs	11.7741 Meas. L-L

60034-2-3 Motor Performance at Standardized Operating Points


	RPM	% Speed	LB-FT	% Torque	HP	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1622	90%	5.8	100%	1.8	91.2	8.59%	130
P2	895	50%	5.8	100%	1.0	86.9	7.45%	112
P3	448	25%	5.8	100%	0.5	80.2	6.10%	92
P4	1623	90%	2.9	50%	0.9	91.7	4.08%	62
P5	900	50%	2.9	50%	0.5	89.7	2.85%	43
P6	898	50%	1.5	25%	0.2	88.8	1.56%	24
P7	445	25%	1.5	25%	0.1	84.8	1.11%	17

61800-9-2 PDS Performance at Reference Operating Points


	RPM	% Speed	LB-FT	% Torque	HP	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1806	100%	5.8	100%	2.0	88.6	12.70%	192
P2	895	50%	5.8	100%	1.0	82.7	10.27%	155
P3	299	17%	5.8	100%	0.3	66.2	8.39%	127
P4	1807	100%	2.9	50%	1.0	89.0	6.15%	93
P5	900	50%	2.9	50%	0.5	83.4	4.92%	74
P6	300	17%	2.9	50%	0.2	66.8	4.10%	62
P7	898	50%	1.5	25%	0.2	78.9	3.30%	50
P8	298	17%	1.5	25%	0.1	60.7	2.65%	40

Points not taken in certified order.


Volts	460	Max RPM	4000	Conn Diag.	CD0006B03	Leads	3
Amps	1.75	Max Amps		Cs Diagram	CS1126	BEMF	296
HP	2	VFD #	ECIN4A2P2			LD	78.9
RPM	1800	S.F.	1.00			LQ	406
Phase/Hz	3/60	Rating	50C AMB-CONT			Rs	11.7741 Meas L-L

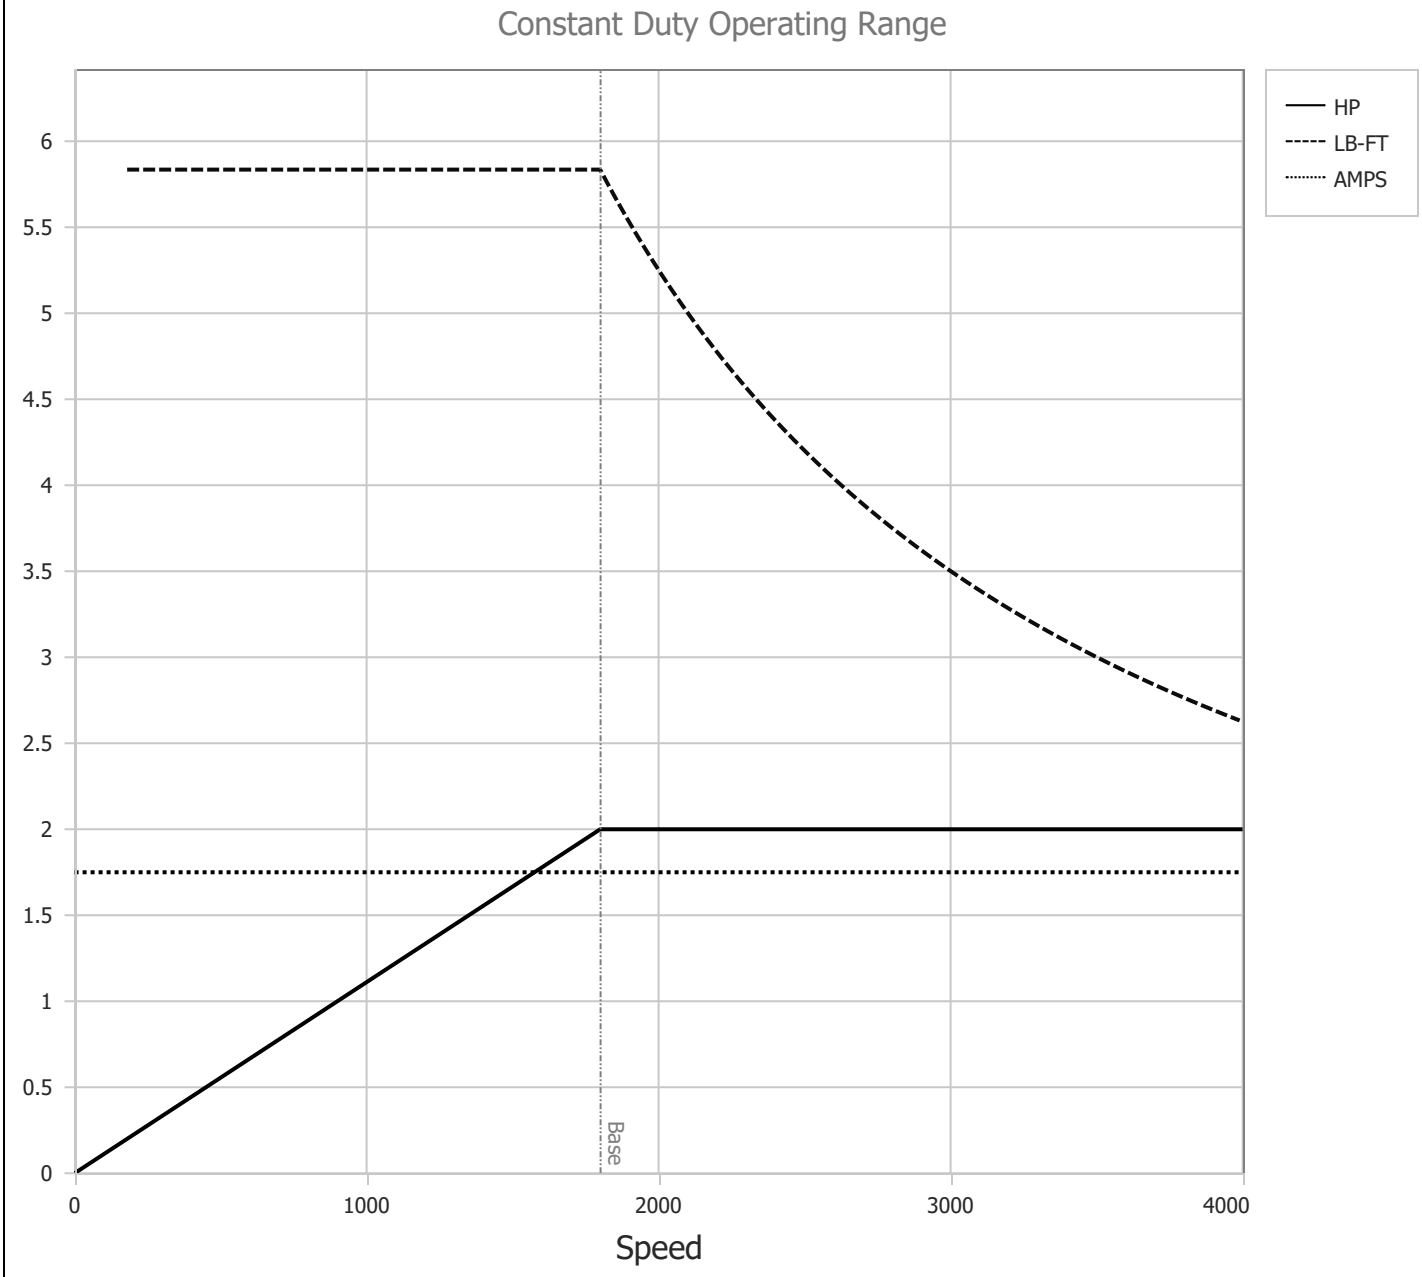



BALDOR • RELIANCE	DR By: R & D CK By: USTOSAN APP By: USJAROB1 Date: 10/02/2024	**AC MOTOR PERFORMANCE CURVES**	**35WGG963** 35-0000-1627 *Test - 111378*

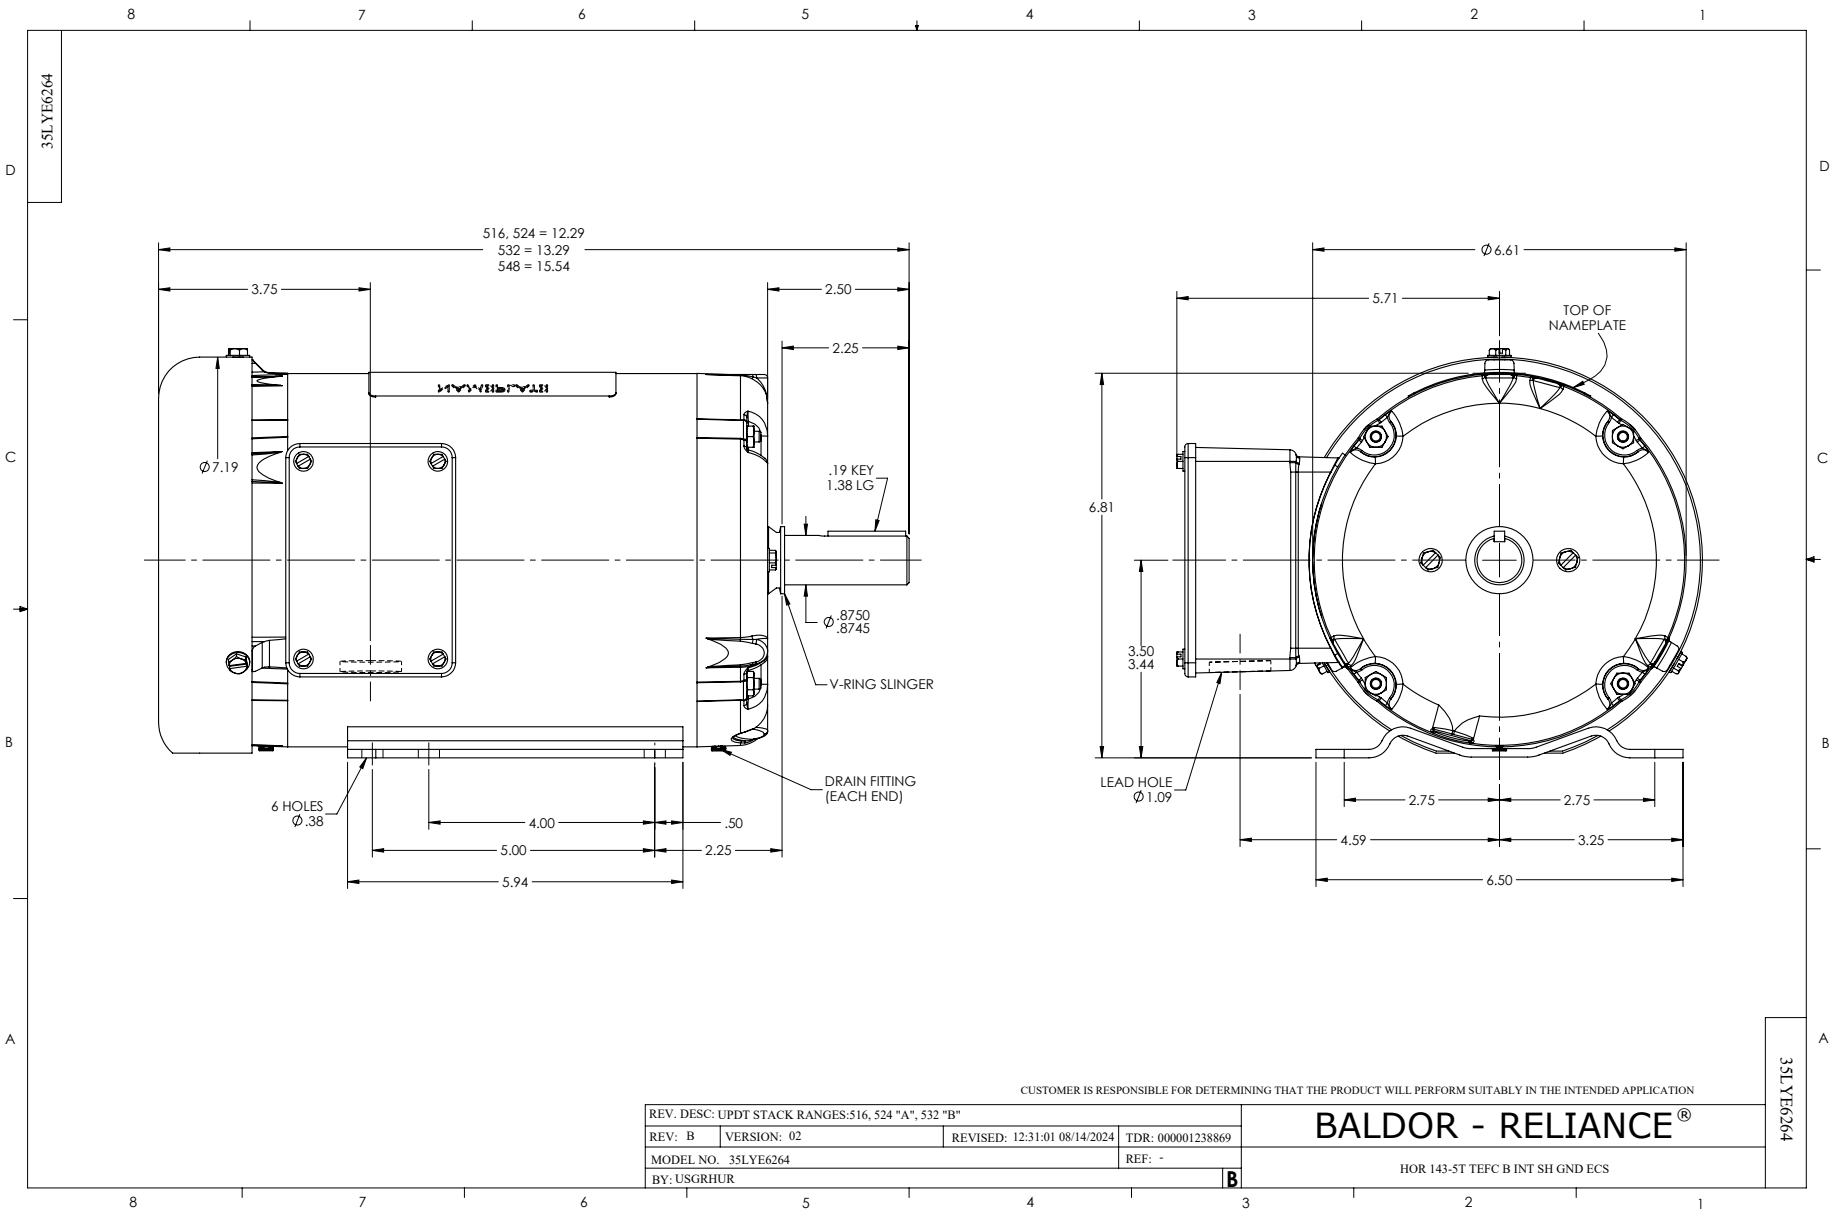
35LYE6264
516, 524 = 12.29
532 = 13.29
548 = 15.54
3.75
2.50
2.25
Ø7.19
.19 KEY
1.38 LG
Ø .8750
Ø .8745
V-RING SLINGER
DRAIN FITTING
(EACH END)
6 HOLES
Ø .38
4.00
.50
5.00
2.25
5.94
Ø6.61
5.71
TOP OF
NAMEPLATE
6.81
3.50
3.44
LEAD HOLE
Ø 1.09
2.75
2.75
4.59
3.25
6.50
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: UPDT STACK RANGES:516, 524 "A", 532 "B"
REV: B
VERSION: 02
REVISED: 12:31:01 08/14/2024
TDR: 000001238869
MODEL NO. 35LYE6264
REF: -
BY: USGRHUR
B
BALDOR - RELIANCE®
HOR 143-5T TEFC B INT SH GND ECS
35LYE6264

CD0005A25

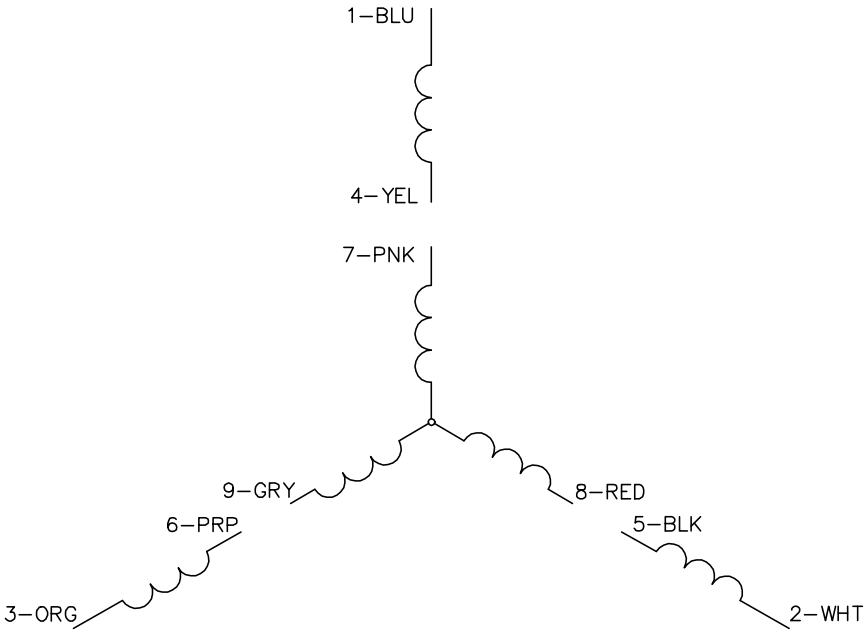

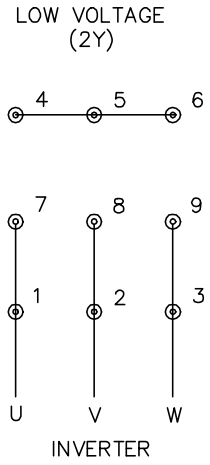

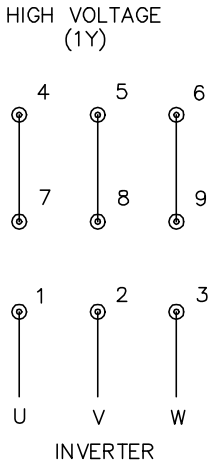

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005A25

REV. DESC: NEW		
REV. LTR: –	VERSION: 00	TDR: 000001135746
FILE: \AAA\00253\082	REVISED: 01:10:57 03/30/2020	BY: ENMARSO
MTL: –		

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, ECS

SH 1 of 1