

# ABB BALDOR RELIANCE III

---

## Customer information packet

ECS101M0H3DF4

3HP, 1800RPM, 3PH, 60HZ, 145T, 3532B, TEFC, F1

Class - None

Division - Not Applicable

**Specifications**

<b>Enclosure</b>	TEFC
<b>Frame</b>	145T
<b>Frame Material</b>	Steel
<b>Frequency</b>	60.00 Hz
<b>Haz Area Class and Group</b>	None
<b>Haz Area Division</b>	Not Applicable
<b>Motor Letter Type</b>	Brushless Wound Field PM Rotor
<b>Output @ Frequency</b>	3.000 HP @ 60 HZ
<b>Phase</b>	3
<b>Synchronous Speed @ Frequency</b>	1800 RPM @ 60 HZ
<b>Voltage @ Frequency</b>	230.0 V @ 60 HZ 460.0 V @ 60 HZ
<b>Agency Approvals</b>	WEEE CULUS
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	Rigid
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	None
<b>Constant Torque Speed Range</b>	6
<b>Current @ Voltage</b>	3.500 A @ 460.0 V 7.000 A @ 230.0 V
<b>Design Code</b>	-
<b>Drip Cover</b>	No Drip Cover
<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	93.0 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	NO FEEDBACK
<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	3.5 a
<b>Insulation Class</b>	F

**Part Detail**

<b>Revision</b>	H
<b>Type</b>	AC
<b>Mech. spec.</b>	35E6264
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	35WGG984
<b>Layout</b>	35LYE6264
<b>Eff. date</b>	02-12-2026
<b>CD Diagram</b>	CD0005A25
<b>Poles</b>	04
<b>Leads</b>	9#16 Y
<b>Proprietary</b>	False
<b>Created date</b>	03-15-2024

<b>Inverter Code</b>	Inverter Duty
<b>KVA Code</b>	-
<b>Lifting Lugs</b>	No Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Motor Lead Quantity/Wire Size</b>	9 @ 116 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3532B
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	14.17 IN
<b>Power Factor</b>	97
<b>Product Family</b>	General Purpose
<b>Pulley Face Code</b>	Standard
<b>Rodent Screen</b>	None
<b>RoHS Status</b>	Y
<b>Service Factor</b>	1.15
<b>Shaft Diameter</b>	0.875 IN
<b>Shaft Ground Indicator</b>	Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Speed</b>	1800 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

Volts	460	Max RPM	4000	Conn Diag.	CD0006B03	Leads	3
Amps	3.5	Max Amps		Cs Diagram	CS1126	BEMF	267
HP	3	VFD#	ECIN4A4P1			LD	57.9
RPM	1800	S.F.	1.00			LQ	218
Phase/Hz	3/60	Rating	40C AMB-CONT			Rs	6.6786 Meas. L-L

**60034-2-3 Motor Performance at Standardized Operating Points**

	RPM	% Speed	LB-FT	% Torque	HP	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1615	90%	8.8	100%	2.7	91.0	8.80%	199
P2	897	50%	8.8	100%	1.5	86.7	7.59%	172
P3	446	25%	8.8	100%	0.7	79.1	6.48%	147
P4	1617	90%	4.4	50%	1.3	91.4	4.22%	95
P5	896	50%	4.4	50%	0.7	88.5	3.22%	73
P6	895	50%	2.2	25%	0.4	87.6	1.74%	39
P7	444	25%	2.2	25%	0.2	82.2	1.32%	30

**61800-9-2 PDS Performance at Reference Operating Points**


	RPM	% Speed	LB-FT	% Torque	HP	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1800	100%	8.8	100%	3.0	88.5	12.88%	292
P2	897	50%	8.8	100%	1.5	82.9	10.19%	231
P3	296	17%	8.8	100%	0.5	65.5	8.56%	194
P4	1798	100%	4.4	50%	1.5	88.2	6.59%	149
P5	896	50%	4.4	50%	0.7	83.4	4.91%	111
P6	295	17%	4.4	50%	0.2	66.3	4.11%	93
P7	895	50%	2.2	25%	0.4	80.3	3.01%	68
P8	294	17%	2.2	25%	0.1	62.1	2.46%	56

Points not taken in certified order.

<b>BALDOR • RELIANCE</b>	DR By:	<u>R &amp; D</u>	<b>AC MOTOR PERFORMANCE CURVES</b>	<b>35WGG943</b> 35E5209G943 Test - 110858
	CK By:	<u>USTOSAN</u>		
	APP By:	<u>USJAROB1</u>		
	Date:	<u>06/27/2024</u>		

Volts	460	Max RPM	4000	Conn Diag.	CD0006B03	Leads	3
Amps	3.5	Max Amps		Cs Diagram	CS1126	BEMF	267
HP	3	VFD #	ECIN4A4P1			LD	57.9
RPM	1800	S.F.	1.00			LQ	218
Phase/Hz	3/60	Rating	40C AMB-CONT			Rs	6.6786 Meas L-L


Constant Duty Operating Range

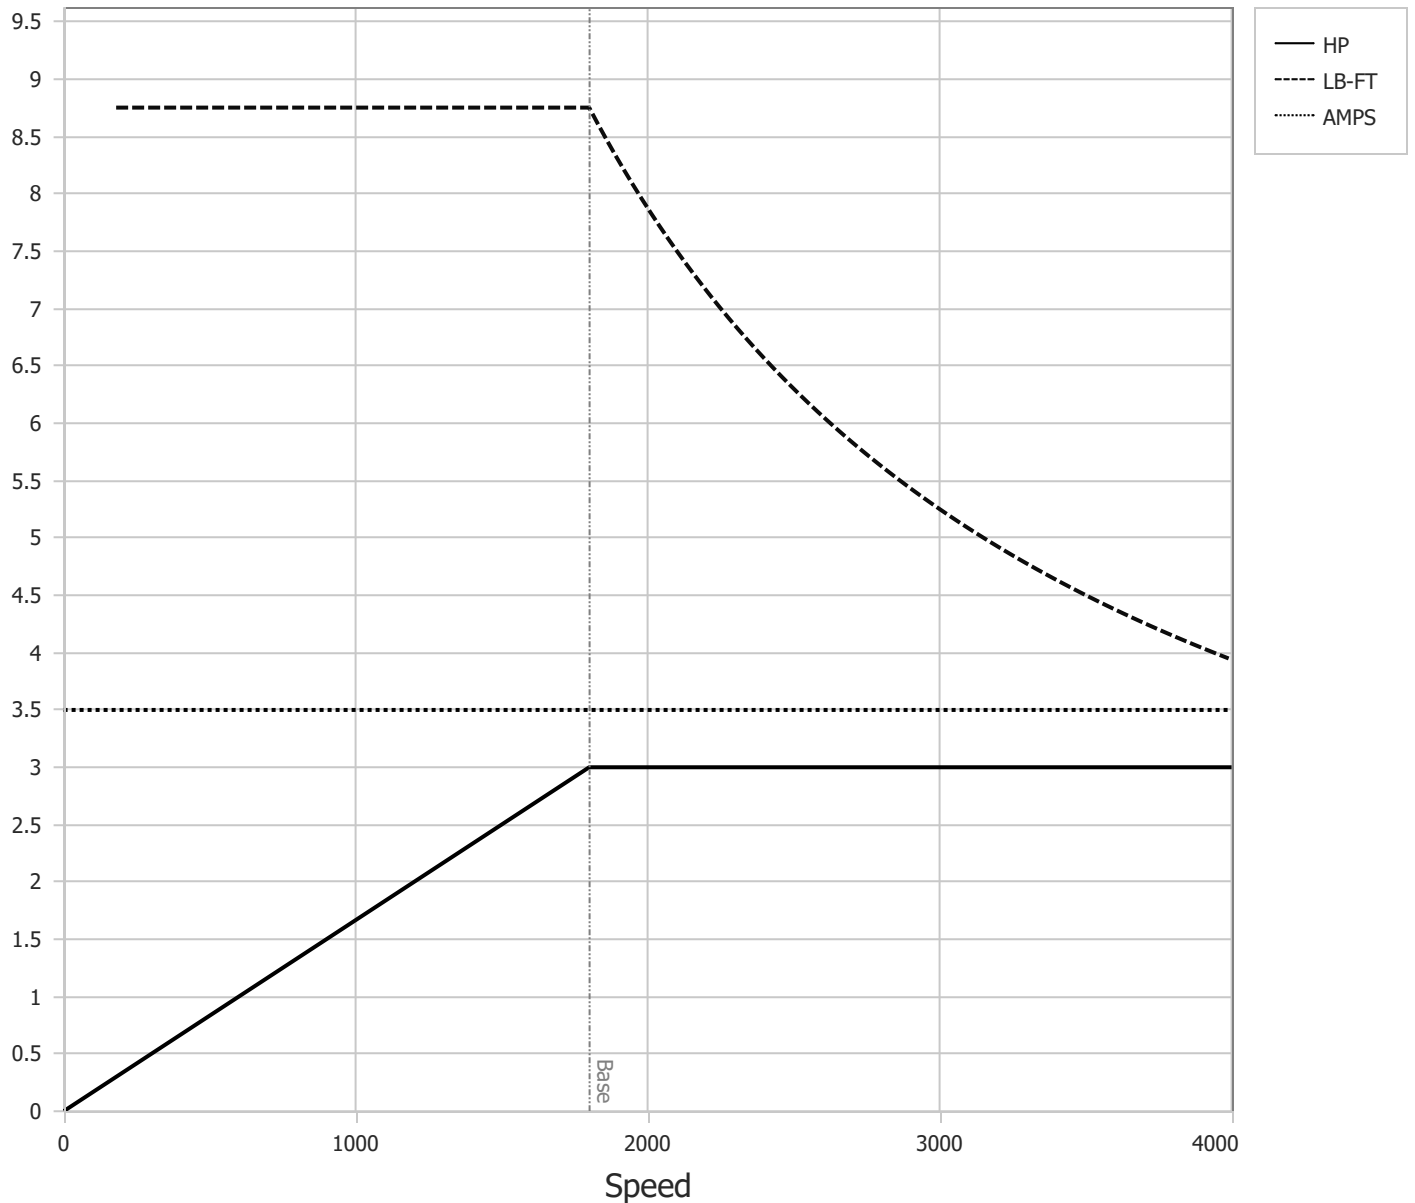


DR By: R & D  
 CK By: USTOSAN  
 APP By: USJAROB1  
 Date: 06/27/2024

**AC MOTOR  
PERFORMANCE  
CURVES**


**35WGG943**  
 35E5209G943  
 Test - 110858

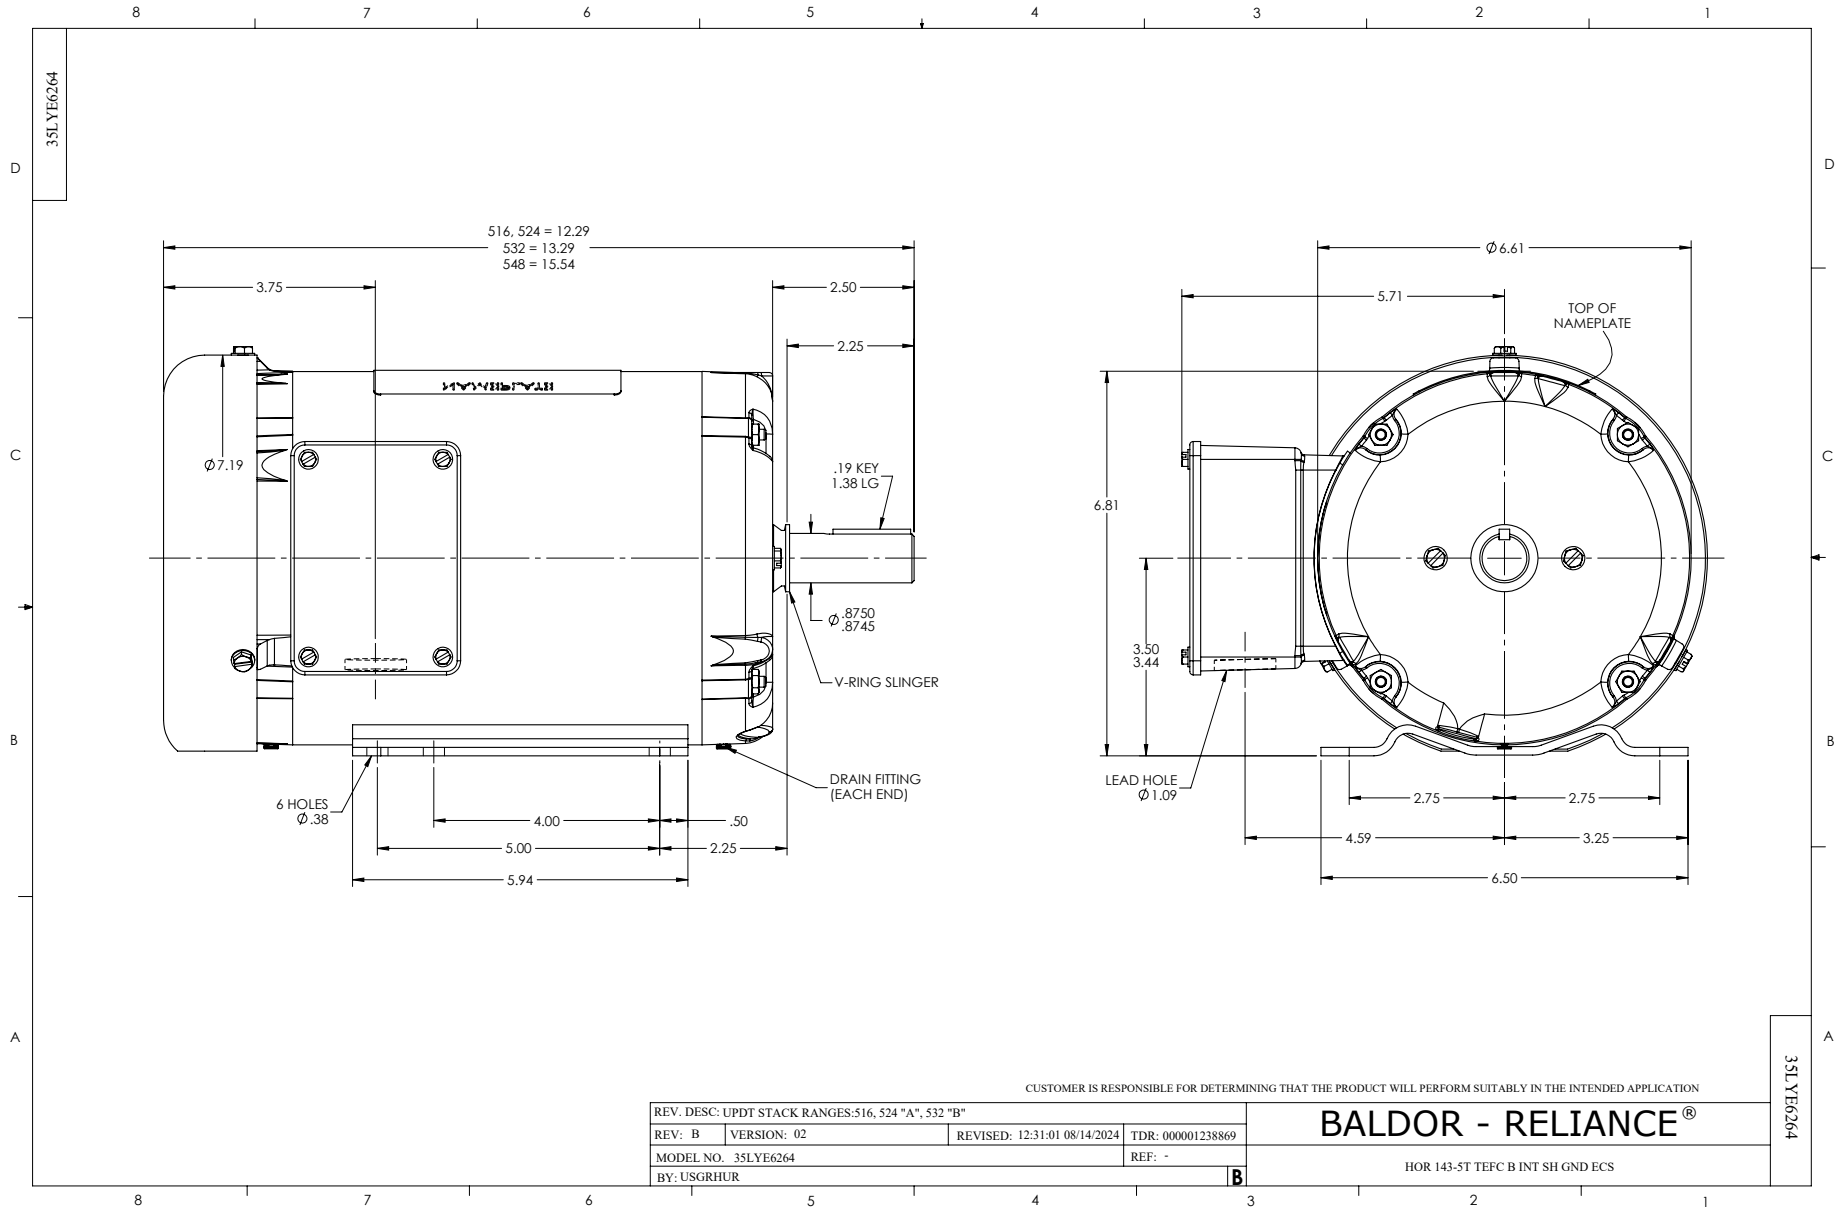


CD0005A25

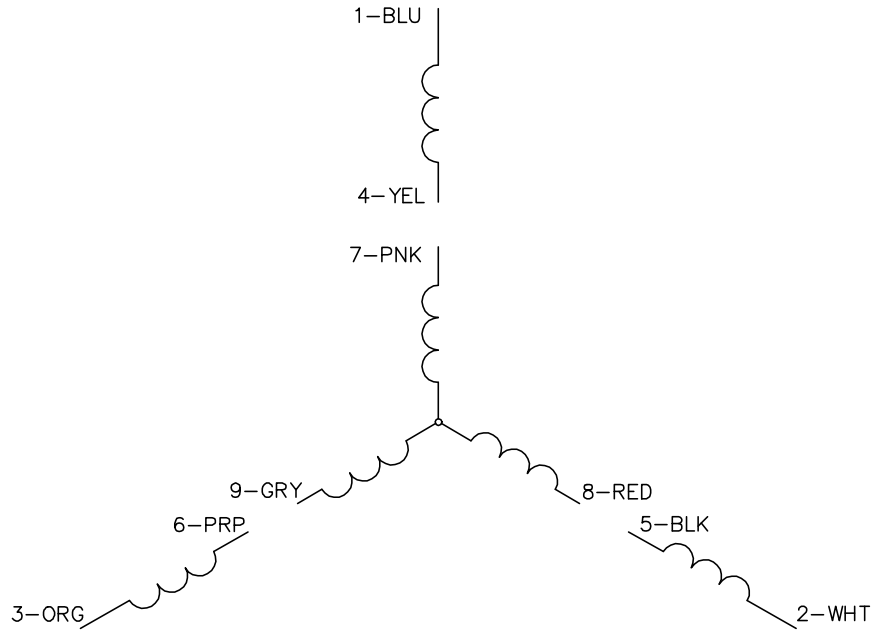

LOW VOLTAGE  
(2Y)

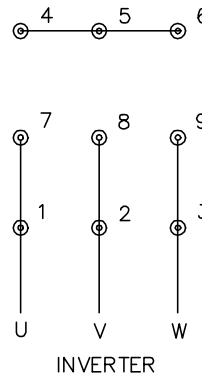

HIGH VOLTAGE  
(1Y)

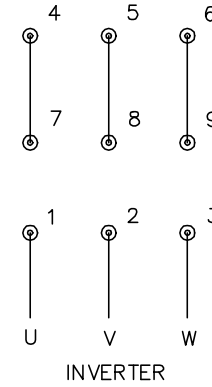

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005A25

REV. DESC: NEW		
REV. LTR: -	VERSION: 00	TDR: 000001135746
FILE: \AAA\00253\082	REVISED: 01:10:57 03/30/2020	BY: ENMARSO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, ECS  
SH 1 of 1