

ABB BALDOR RELIANCE III

Customer information packet

ECS101M0K5P5FD4

5.5KW, 1500RPM, 3PH, 50HZ, D132D, 3730B, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	D132D
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.500 KW @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	190.0 V @ 50 HZ 380.0 V @ 50 HZ
Agency Approvals	CE WEEE CULUS
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	5
Current @ Voltage	21.000 A @ 190.0 V 10.500 A @ 380.0 V
Drip Cover	Drip Cover
Duty Rating	S1
Efficiency @ 100% Load	92.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Frame Prefix	D
Heater Indicator	No Heater
High Voltage Full Load Amps	10.5 a

Part Detail

Revision	K
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	37WGA0016
Layout	37LY-000-403
Eff. date	02-12-2026
CD Diagram	CD0005A25
Poles	04
Leads	9#12
Proprietary	False
Created date	05-26-2022

Insulation Class	F
Inverter Code	Inverter Duty
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3730B
Mounting Arrangement	V1
Number of Poles	4
Overall Length	17.62 IN
Power Factor	90
Product Family	General Purpose
Pulley Face Code	D-Flange
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.497 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3968B01A01									
CAT.NO.	ECS101MOK5P5FD4								
SPEC.	37-0000-0476			YR					
FRAME	D132D	IP	55	WT.	67				
KW	5.5	HZ	50	PH	3	DUTY-IPM	S1		
INS CL	F	CLASS RISE		B	AMB-C		40		
EFF. CL	IE5	EFF	92.7	COSφ		90			
VOLTS	190/380		FLA	21.42/10.71					
1/MIN	1500			1/MIN MAX		3000			
BEMF (V)	94/188			RS (OHMS)		0.35/1.39			
LD (MH)	6.99/28.09			LQ (MH)		20.19/80.59			
VPWM	CP =	50		TO	100				
CT	5	TO	50	VT	1	TO	50		
MATCHED INV									
DE	6208		ODE	6206					
SERIAL #									

Volts	190/380	Max RPM	3000	Conn Diag.	CD0005A25	Leads	9
Amps	21.85/10.92	Max Amps		Cs Diagram	CS0576	BEMF	0
KW	5.5	VFD#	ACS380-040S-12			LD	0
RPM	1500	S.F.	1.00			LQ	0
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	1.3847 Meas. L-L

60034-2-3 Motor Performance at Standardized Operating Points

	RPM	% Speed	LB-FT	% Torque	KW	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1350	90%	25.8	100%	6.6	92.1	7.71%	424
P2	750	50%	25.8	100%	3.7	88.9	6.27%	345
P3	375	25%	25.8	100%	1.8	82.5	5.33%	293
P4	1350	90%	12.9	50%	3.3	92.8	3.51%	193
P5	750	50%	12.9	50%	1.8	90.6	2.60%	143
P6	750	50%	6.5	25%	0.9	90.3	1.35%	74
P7	375	25%	6.5	25%	0.5	86.9	0.94%	52

61800-9-2 PDS Performance at Reference Operating Points


	RPM	% Speed	LB-FT	% Torque	KW	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1500	100%	25.8	100%	7.4	91.0	9.91%	545
P2	750	50%	25.8	100%	3.7	85.9	8.19%	451
P3	255	17%	25.8	100%	1.3	71.6	6.75%	371
P4	1500	100%	12.9	50%	3.7	90.8	5.05%	278
P5	750	50%	12.9	50%	1.8	87.2	3.67%	202
P6	255	17%	12.9	50%	0.6	74.7	2.87%	158
P7	750	50%	6.5	25%	0.9	85.8	2.06%	114
P8	255	17%	6.5	25%	0.3	73.8	1.51%	83

Points not taken in certified order.

BALDOR • RELIANCE	DR By:	<u>R & D</u>	AC MOTOR PERFORMANCE CURVES	37WGA0016 37-0000-0483 Test - 111886
	CK By:	<u>USGAHIL</u>		
	APP By:	<u>USJAROB1</u>		
	Date:	<u>02/04/2025</u>		

Volts	190/380	Max RPM	3000	Conn Diag.	CD0005A25	Leads	9
Amps	21.85/10.92	Max Amps		Cs Diagram	CS0576	BEMF	0
KW	5.5	VFD #	ACS380-040S-12			LD	0
RPM	1500	S.F.	1.00			LQ	0
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	1.3847 Meas L-L


Constant Duty Operating Range

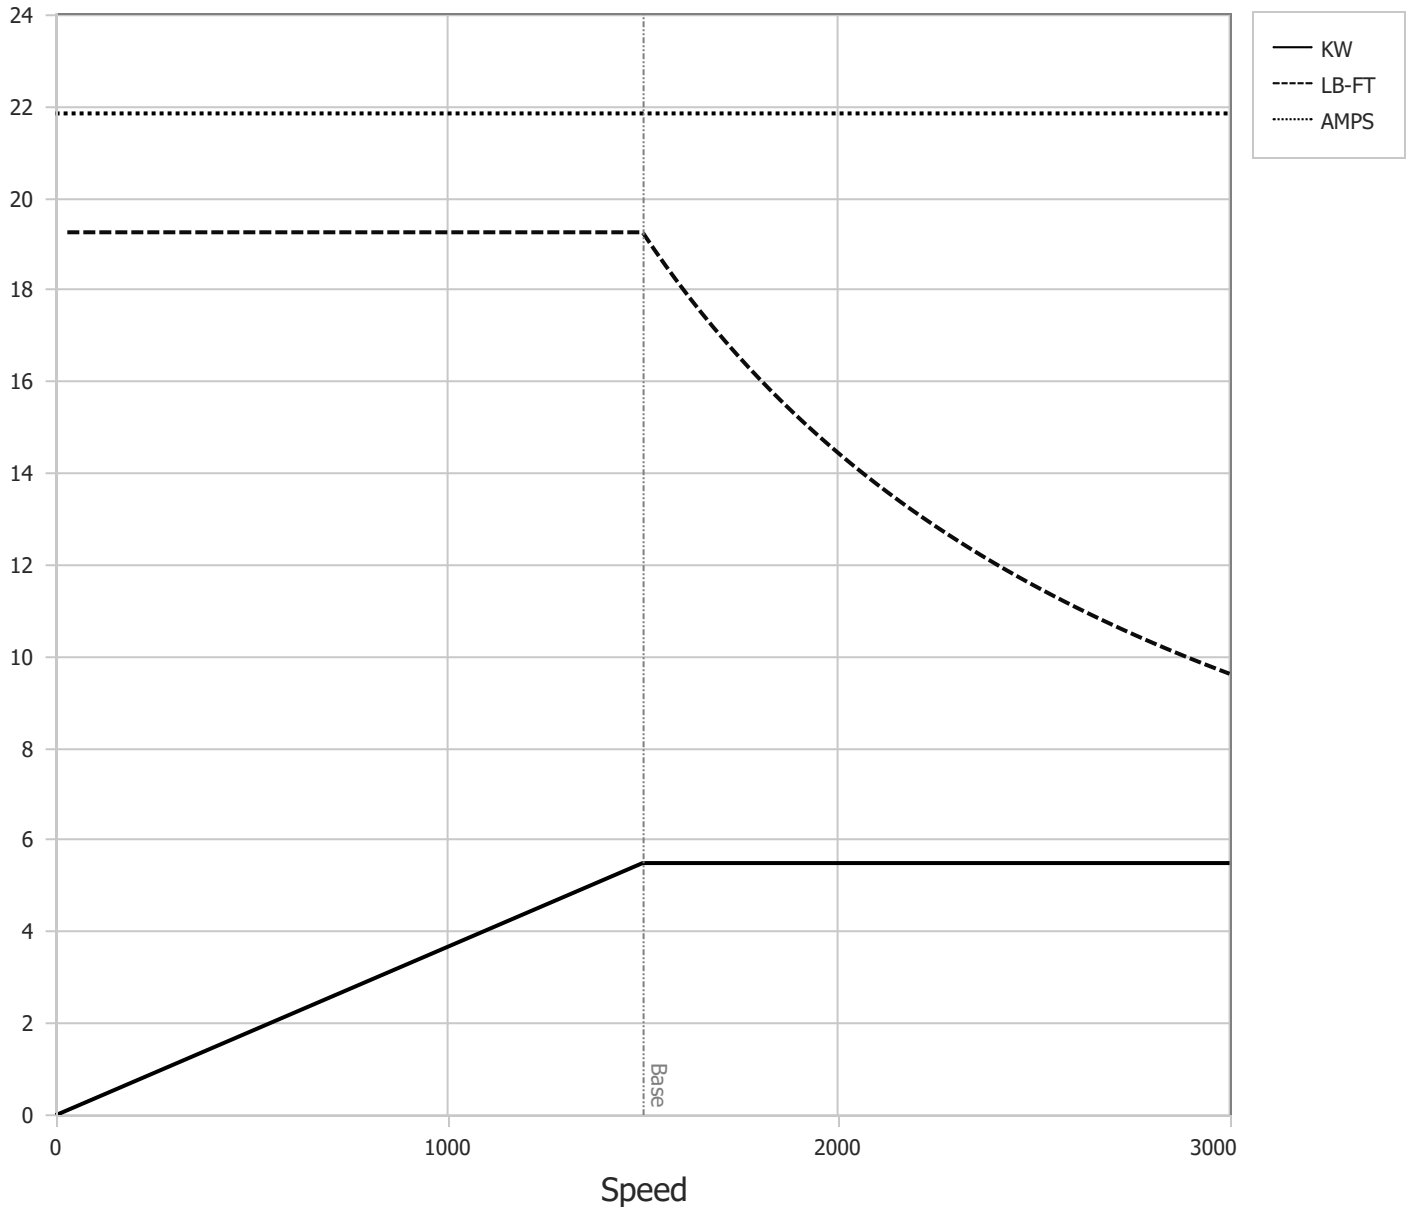




DR By: R & D
 CK By: USGAHIL
 APP By: USJAROB1
 Date: 02/04/2025

**AC MOTOR
PERFORMANCE
CURVES**

37WGA0016
 37-0000-0483
 Test - 111886

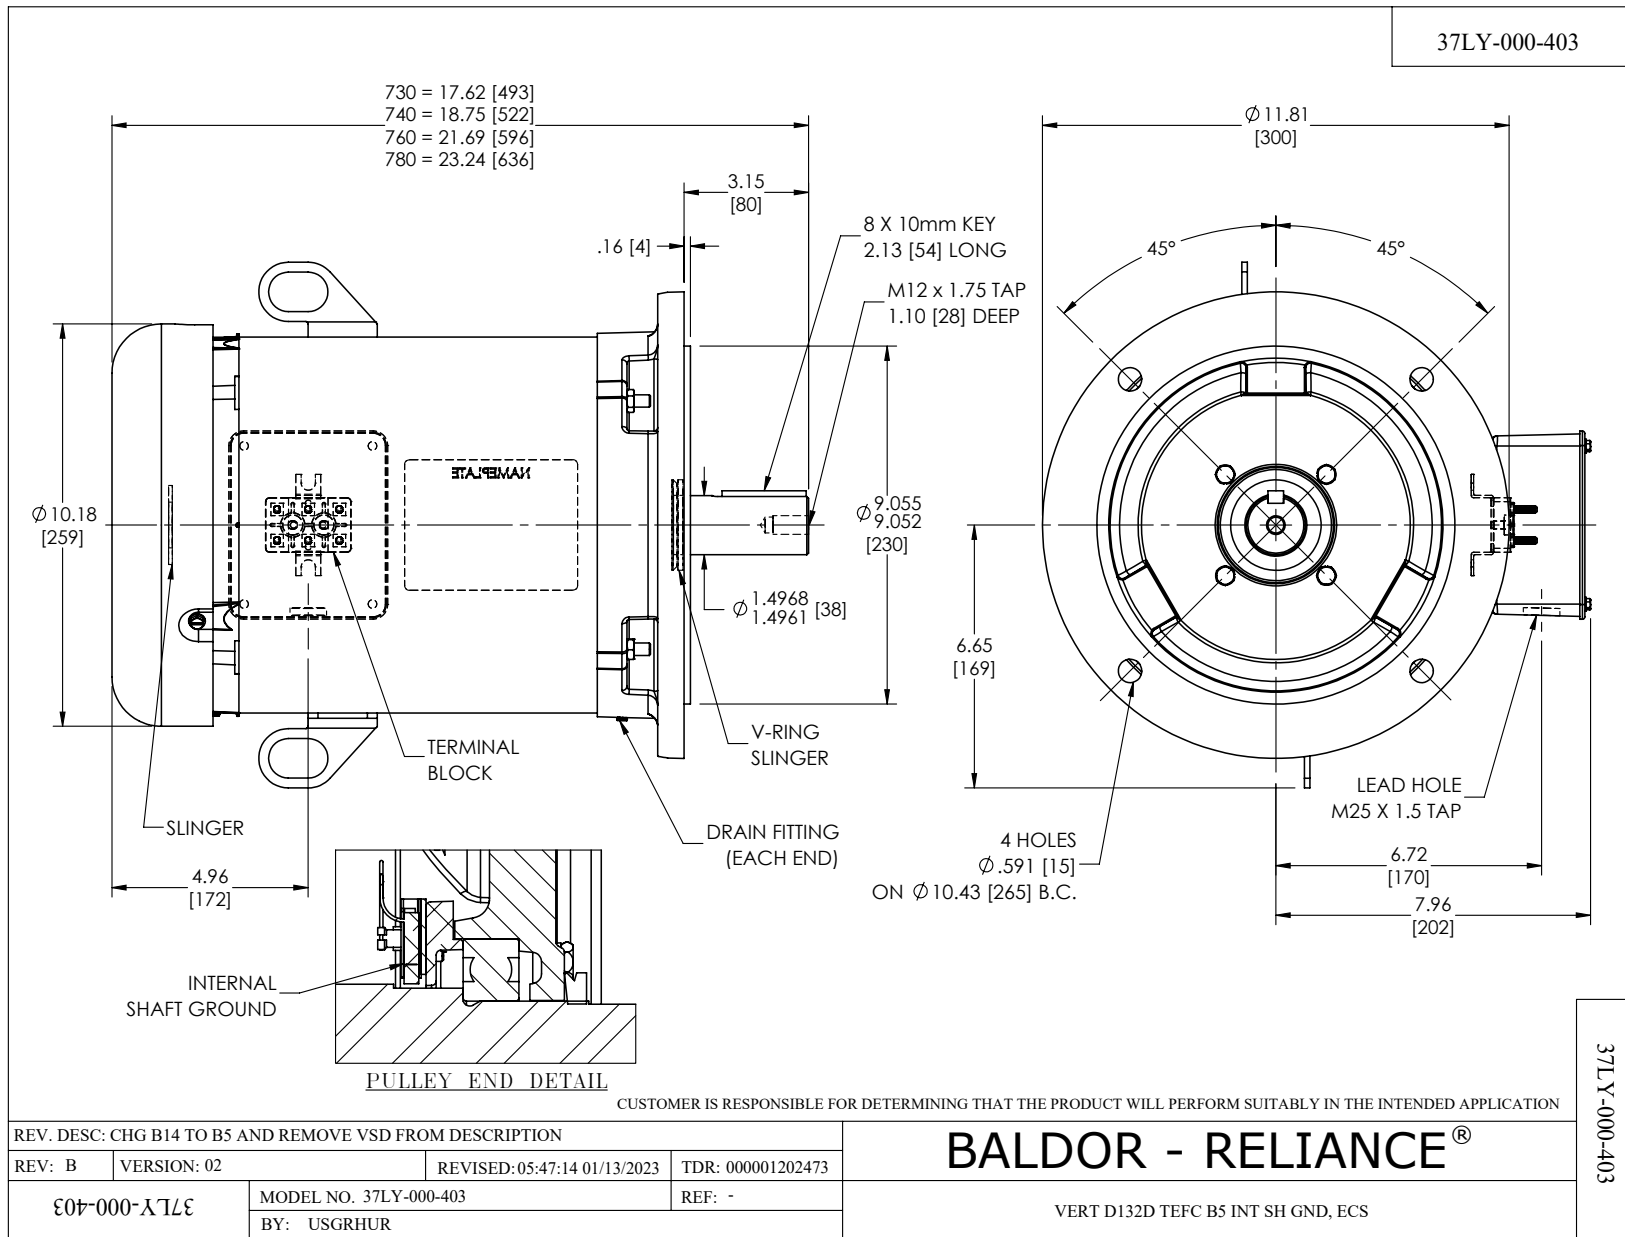

CD0005A25

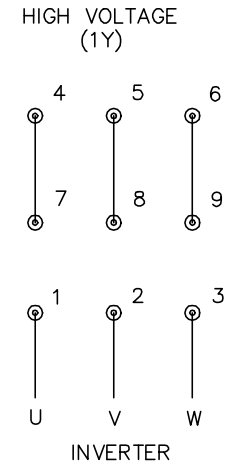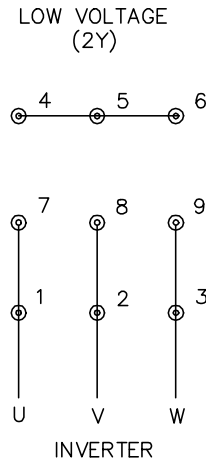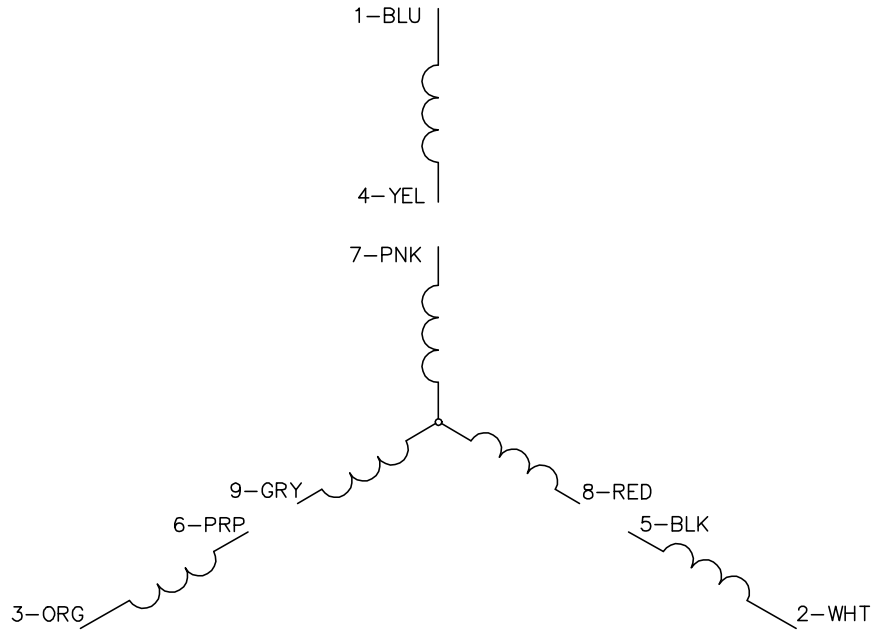

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005A25

REV. DESC: NEW		
REV. LTR: -	VERSION: 00	TDR: 000001135746
FILE: \AAA\00253\082	REVISED: 01:10:57 03/30/2020	BY: ENMARSO
MTL: -	© □	

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, ECS
SH 1 of 1