

ABB BALDOR RELIANCE III

Customer information packet

ECTM3661T-5G

3HP, 1755RPM, 3PH, 60HZ, 182T, 0632M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	182T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.300 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	Heater Included, 115 V
High Voltage Full Load Amps	3.3 a
Insulation Class	F

Part Detail

Revision	C
Type	AC
Mech. spec.	06J518
Base	
Status	PRD/A
Elec. spec.	06WGX319
Layout	06LYJ518
Eff. date	06-08-2023
CD Diagram	CD0006
Poles	04
Leads	3#16
Proprietary	False
Created date	04-20-2022

Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0632M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.93 IN
Power Factor	77
Product Family	Chemical Processing (Not DC)
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1755 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1260									
CAT.NO.	ECTM3661T-5G								
SPEC.	06J518X319G1								
HP	3								
VOLTS	575								
AMP	3.3								
RPM	1755								
FRAME	182T	HZ		60		PH		3	
SER.F.	1.15	CODE		J	DES		B	CL	F
NEMA-NOM-EFF	89.5	PF		77					
RATING	40C AMB-CONT								
CC									
DE	6206	ODE		6205					
ENCL	TEFC	SN							
	INV DUTY 20:1 VT								

AC Induction Motor Performance Data

Record # 75292

Typical performance - not guaranteed values

Winding: 06WGX319-R001			Type: 0632M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		3	Full Load Torque		9.17 LB-FT	
Volts		575	Start Configuration		direct on line	
Full Load Amps		3.3	Breakdown Torque		20.9 LB-FT	
R.P.M.		1755	Pull-up Torque		11.4 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	12.71 LB-FT	
NEMA Design Code	B	KVA Code	J	Starting Current	18.81 A	
Service Factor (S.F.)		1.15	No-load Current		1.29 A	
NEMA Nom. Eff.	89.5	Power Factor	77	Line-line Res. @ 25°C	6.2 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		41°C	
S.F. Amps			Temp. Rise @ S.F. Load		54°C	
			Locked-rotor Power Factor		41.1	
			Rotor inertia		0.298 LB-FT2	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	54	74	81	84	85	84	85
Efficiency	86.9	89.6	89.6	88.1	86.2	83.1	87
Speed	1785	1769	1753	1734	1711	1684	1720
Line amperes	1.57	2.17	2.94	3.81	4.83	6.1	4.42


ABB Motors and Mechanical Inc.

WINDING # 06WGX319

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1755 RPM 460 V 0632M

TORQUES (LB-FT): PO=20.9 PU=11.4 LR=12.71 LRA=18.81

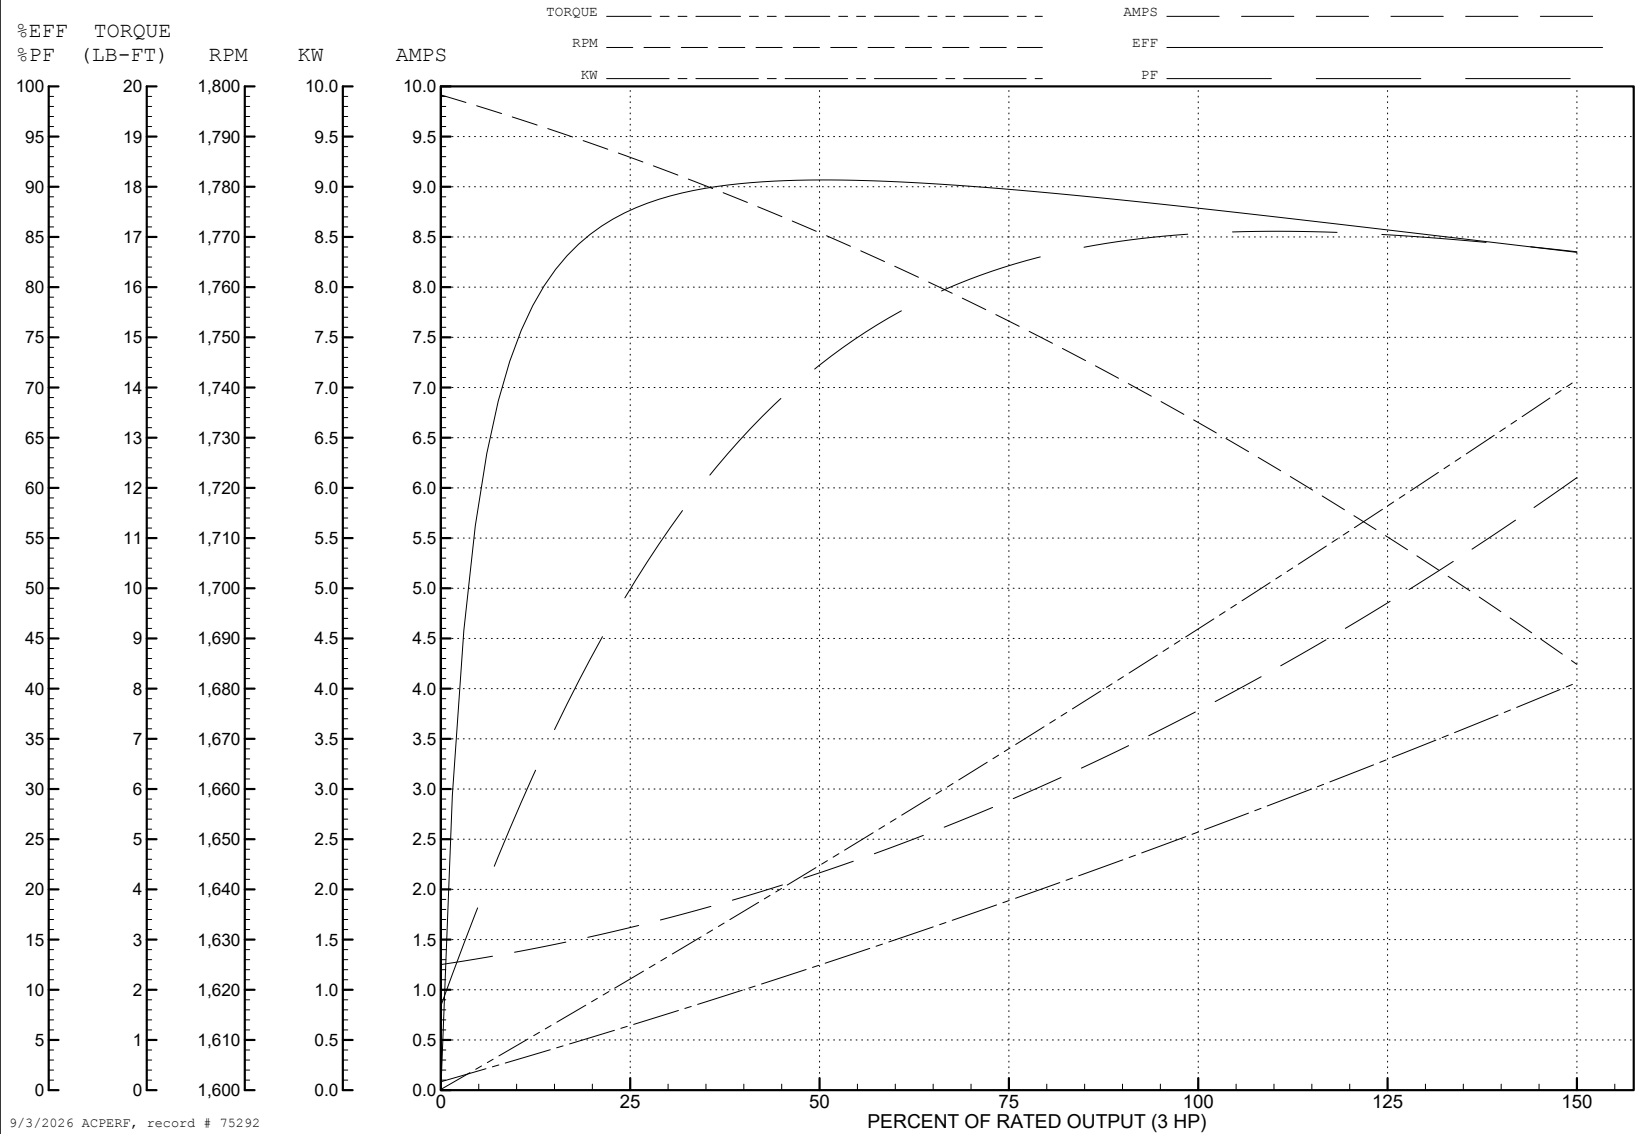

AC Induction Motor Performance Data

Record # 84796

Typical performance - not guaranteed values

Winding: 06WGX319-R001			Type: 0632M		Enclosure: TEFC		
Nameplate Data			575 V, 60 Hz: Single Voltage Motor				
Rated Output (KW)		2.2	Full Load Torque		12.21 N-M		
Volts		575	Start Configuration		direct on line		
Full Load Amps		3.3	Breakdown Torque		28.35 N-M		
R.P.M.		1755	Pull-up Torque		15.46 N-M		
Hz	60	Phase	3	Locked-rotor Torque		17.23 N-M	
NEMA Design Code		B	KVA Code	J	Starting Current		18.81 A
Service Factor (S.F.)		1.15	No-load Current		1.29 A		
NEMA Nom. Eff.		89.5	Power Factor	77	Line-line Res. @ 25°C		6.2 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		40°C
S.F. Amps					Temp. Rise @ S.F. Load		48°C
					Locked-rotor Power Factor		41.5
					Rotor inertia		0.0126 kg-m²

Load Characteristics 575 V, 60 Hz, 2.2 KW

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	43	59	65	67	68	67	68
Efficiency	86.7	89.8	89.5	88.1	86.3	83.1	87
Speed	1785	1769	1753	1735	1713	1685	1722
Line amperes	1.56	2.16	2.91	3.76	4.75	6	4.35


ABB Motors and Mechanical Inc.


WINDING # 06WGX319

Typical performance - not guaranteed values.




2.2 KW 3 PH 60 HZ 1755 RPM 575 V 0632M

TORQUES (N-M) : PO=28.35 PU=15.46 LR=17.23 LRA=18.81

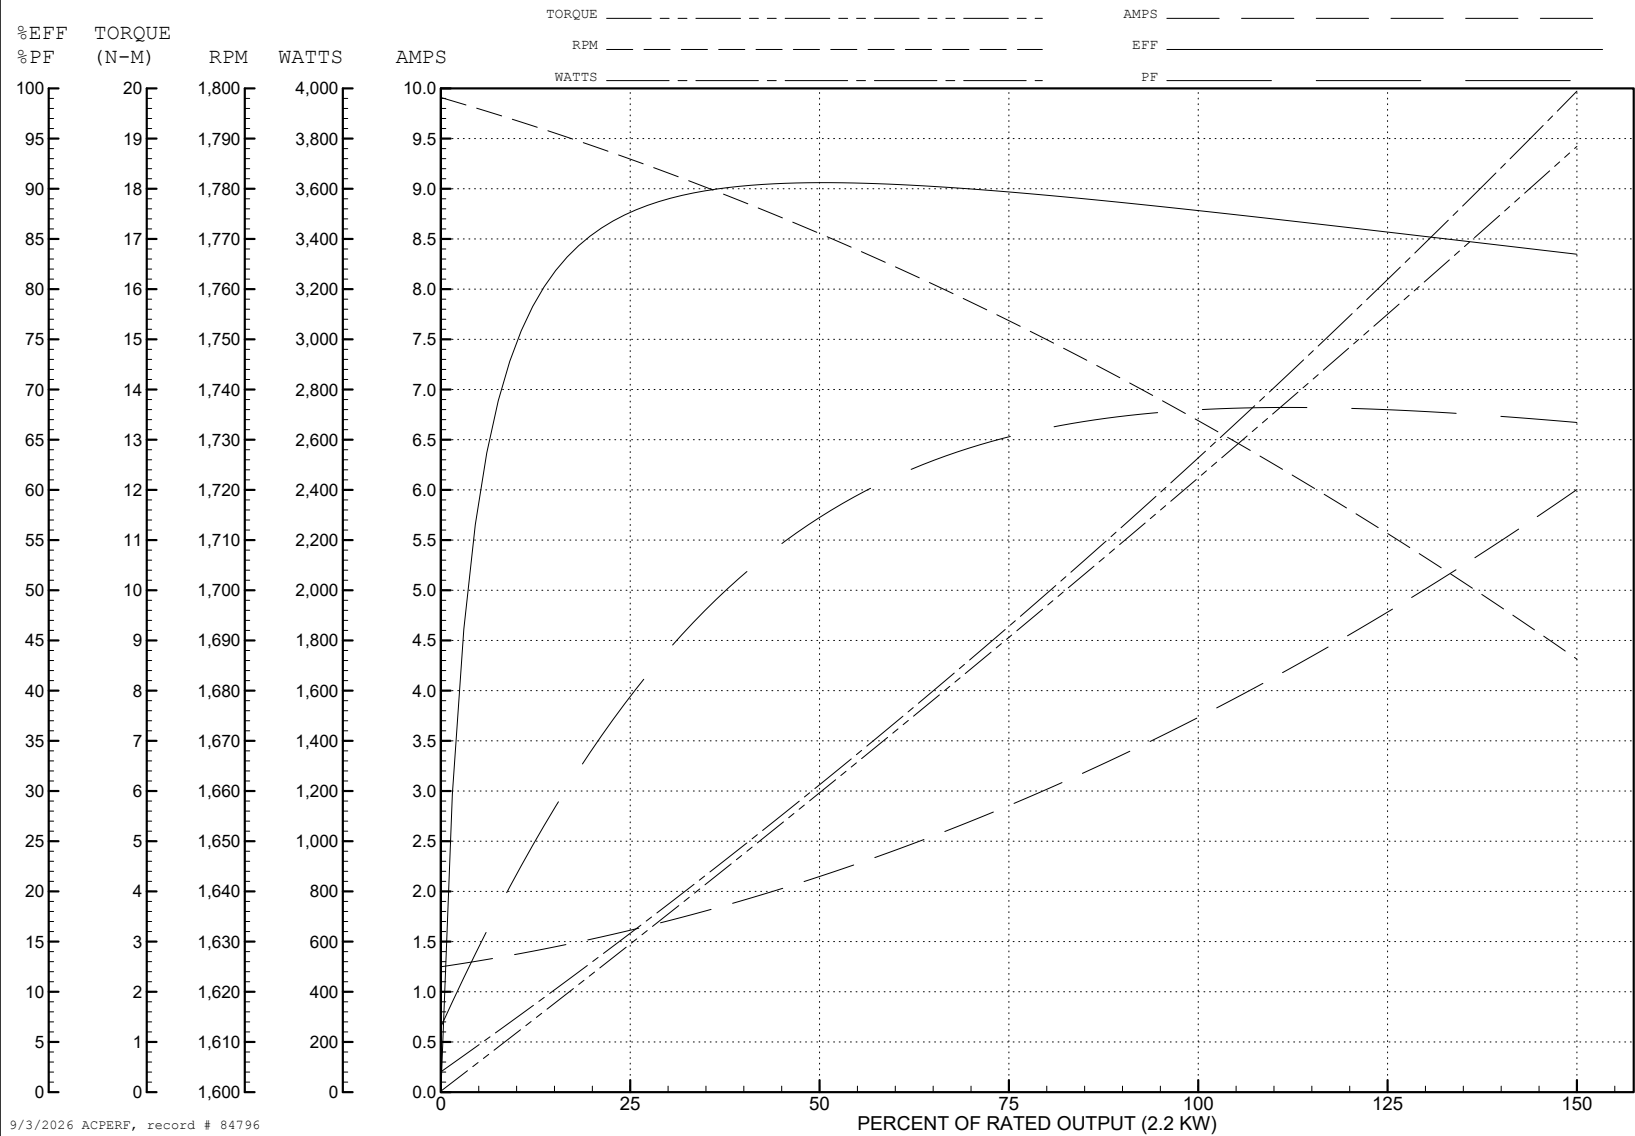

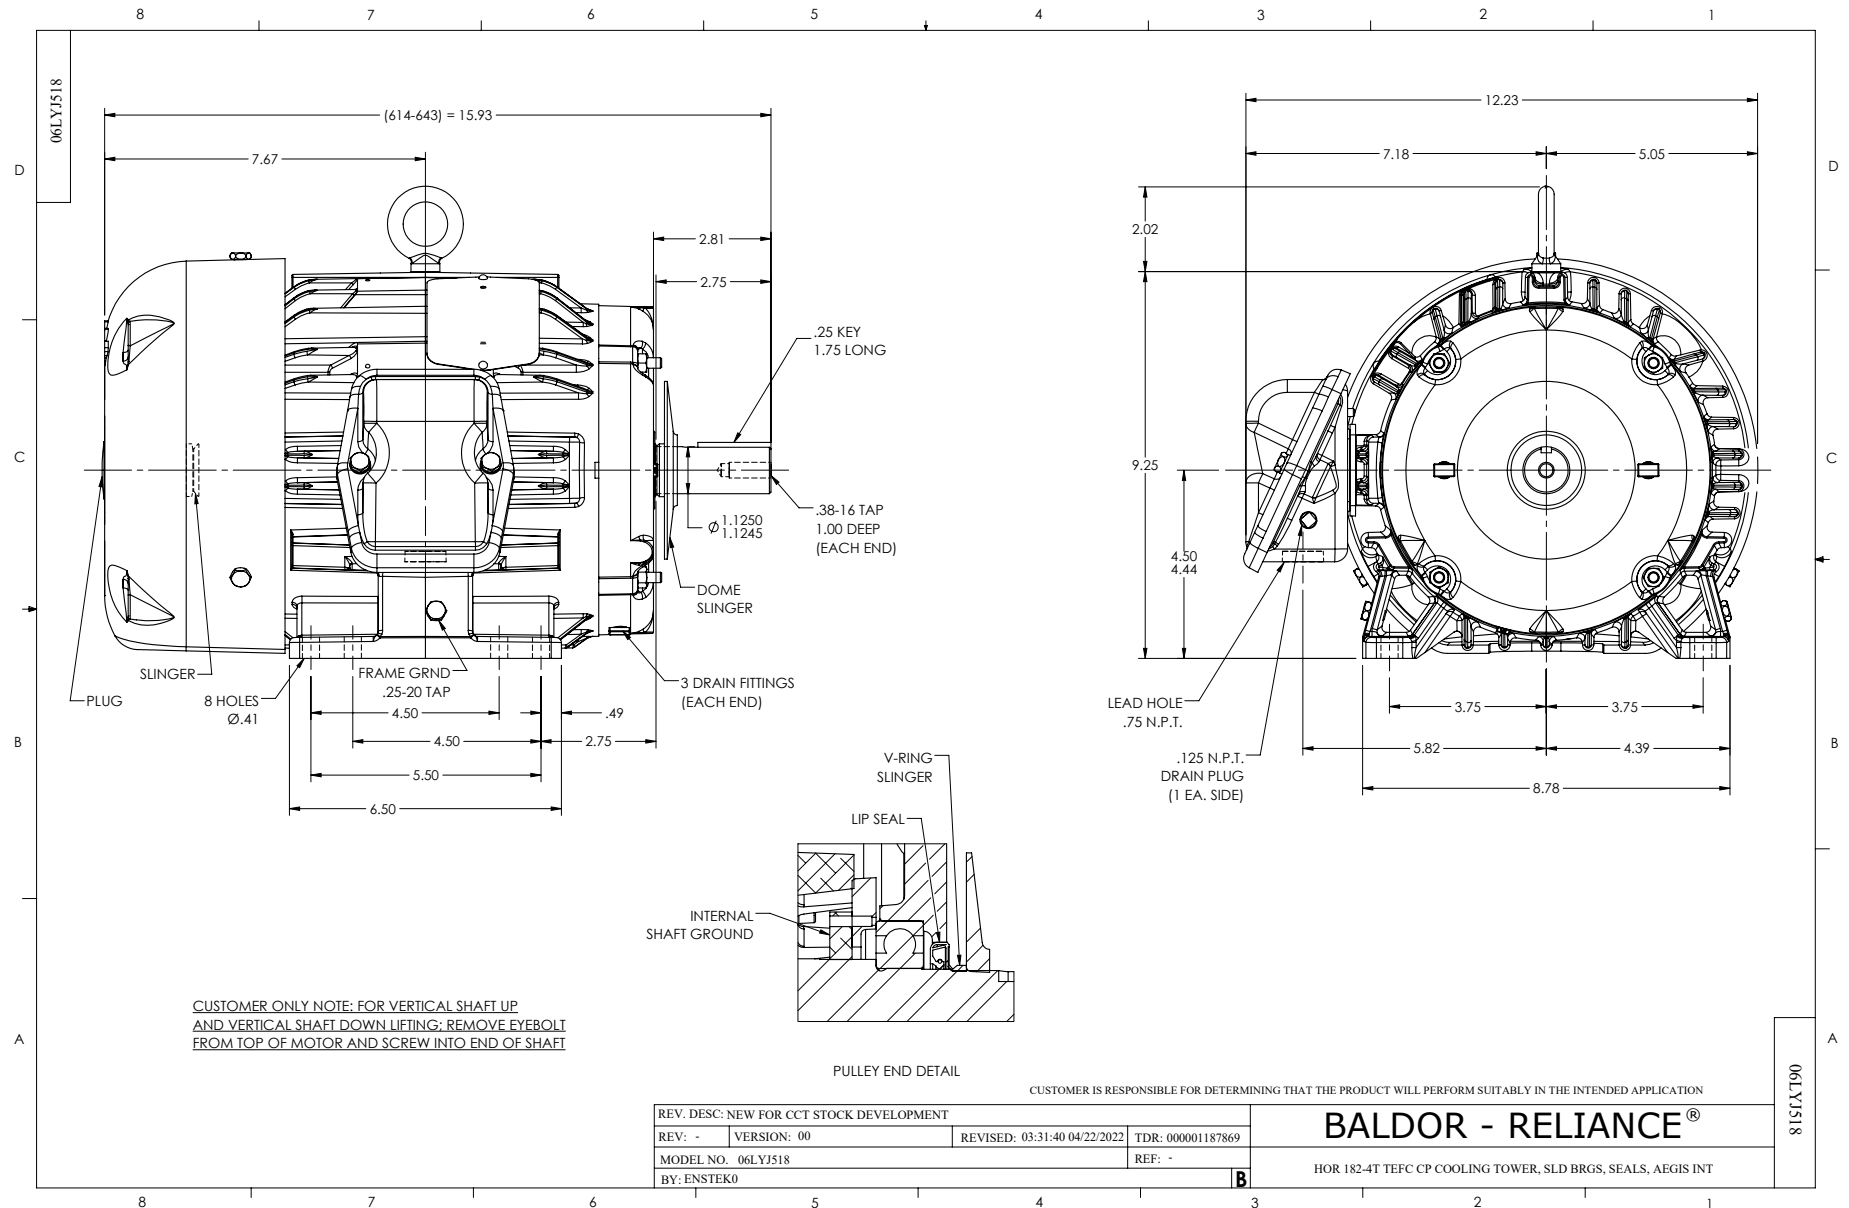

CD0006

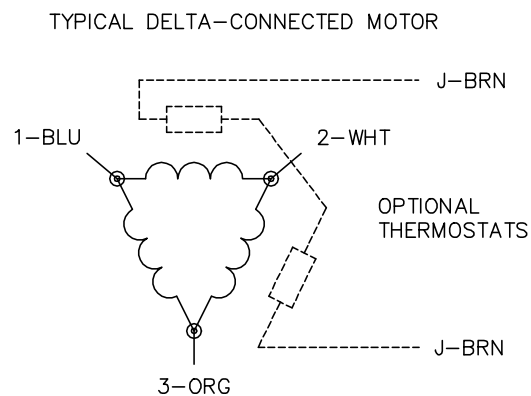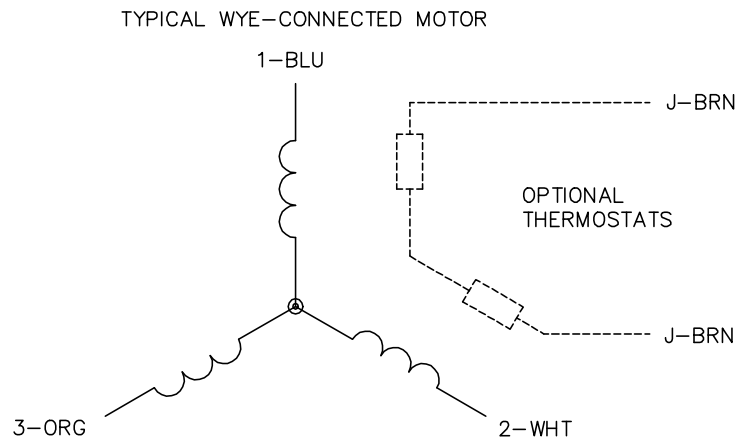
NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: -


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1