

ABB BALDOR RELIANCE III

Customer information packet

EFM2531T

25HP, 1775RPM, 3PH, 60HZ, 284T, 4050M, OPSB, F2

Specifications

Enclosure	OPSB
Frame	284T
Frame Material	Steel
Frequency	50.00 Hz 60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ 20.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 415.0 V @ 50 HZ 380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ
Agency Approvals	WEEE NEMA PREMIUM (OLD LOGO) NEMA PREMIUM CURUSEEV CE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	64.000 A @ 208.0 V 60.000 A @ 230.0 V 58.000 A @ 190.0 V 30.000 A @ 460.0 V 30.000 A @ 415.0 V 29.000 A @ 380.0 V

Part Detail

Revision	J
Type	AC
Mech. spec.	40E208
Base	
Status	PRD/A
Elec. spec.	40WGX806
Layout	40LYE208
Eff. date	05-28-2025
CD Diagram	CD0005
Poles	04
Leads	9#10
Proprietary	False
Created date	02-10-2021

Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	29.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4050M
Mounting Arrangement	F2
Number of Poles	4
Overall Length	25.06 IN
Power Factor	82
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1475 rpm
	1775 rpm

Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4295L									
CAT.NO.	EFM2531T								
SPEC.	40E208X806						IP	22	
HP	25HP/18.5KW//20HP/15KW								
VOLTS	230/460//190/380-415								
AMPS	60/30//58/29-30								
R.P.M. (1/MIN)	1775//1475								
FRAME	284T		HZ	60//50			PH	3	
SER.F.	1.15	CODE	G	DES.	A	CLASS	F		
NEMA NOM. EFF.	93.6//92.1		P.F.	82					
RATING	40C AMB-CONT					WT.	313		
CC	010A								
ENCL	OPSB	SN							
DE	6311		ODE	6309					
	IE3-60:93.8(75%)93.1(50%)								
	IE3-50:93.2(75%)92.2(50%)								
	IC01 2:1 CT/20:1 VT								

Accessories

Part number	Description	Multiplier
40-1400	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 92775

Typical performance - not guaranteed values

Winding: 40WGX806-R004		Type: 4050M	Enclosure: OPSB
Nameplate Data		460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	25//20	Full Load Torque	73.81 LB-FT
Volts	230/460//190/380-415	Start Configuration	direct on line
Full Load Amps	60/30//58/29-30	Breakdown Torque	232 LB-FT
R.P.M.	1775//1475	Pull-up Torque	116 LB-FT
Hz	60//50 Phase	Locked-rotor Torque	133 LB-FT
NEMA Design Code	A KVA Code	Starting Current	192 A
Service Factor (S.F.)	1.15	No-load Current	12.6 A
NEMA Nom. Eff.	93.6 Power Factor	Line-line Res. @ 25°C	0.35407 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	28°C
S.F. Amps		Temp. Rise @ S.F. Load	34°C
		Locked-rotor Power Factor	34.7
		Rotor inertia	3.96 lb-ft ²

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	45	67	78	82	85	85	84
Efficiency	89.4	93.1	93.8	93.6	93	92.1	93.2
Speed	1794.8	1789.5	1783.7	1777.6	1771	1763.2	1774
Line amperes	14.5	18.6	24.1	30.3	37.2	44.6	34.4


ABB Motors and Mechanical Inc.

WINDING # 40WGX806

Typical performance - not guaranteed values.

25 HP 3 PH 60 HZ 1777.6 RPM 460 V 4050M

TORQUES (LB-FT): PO=232 PU=116 LR=133 LRA=192

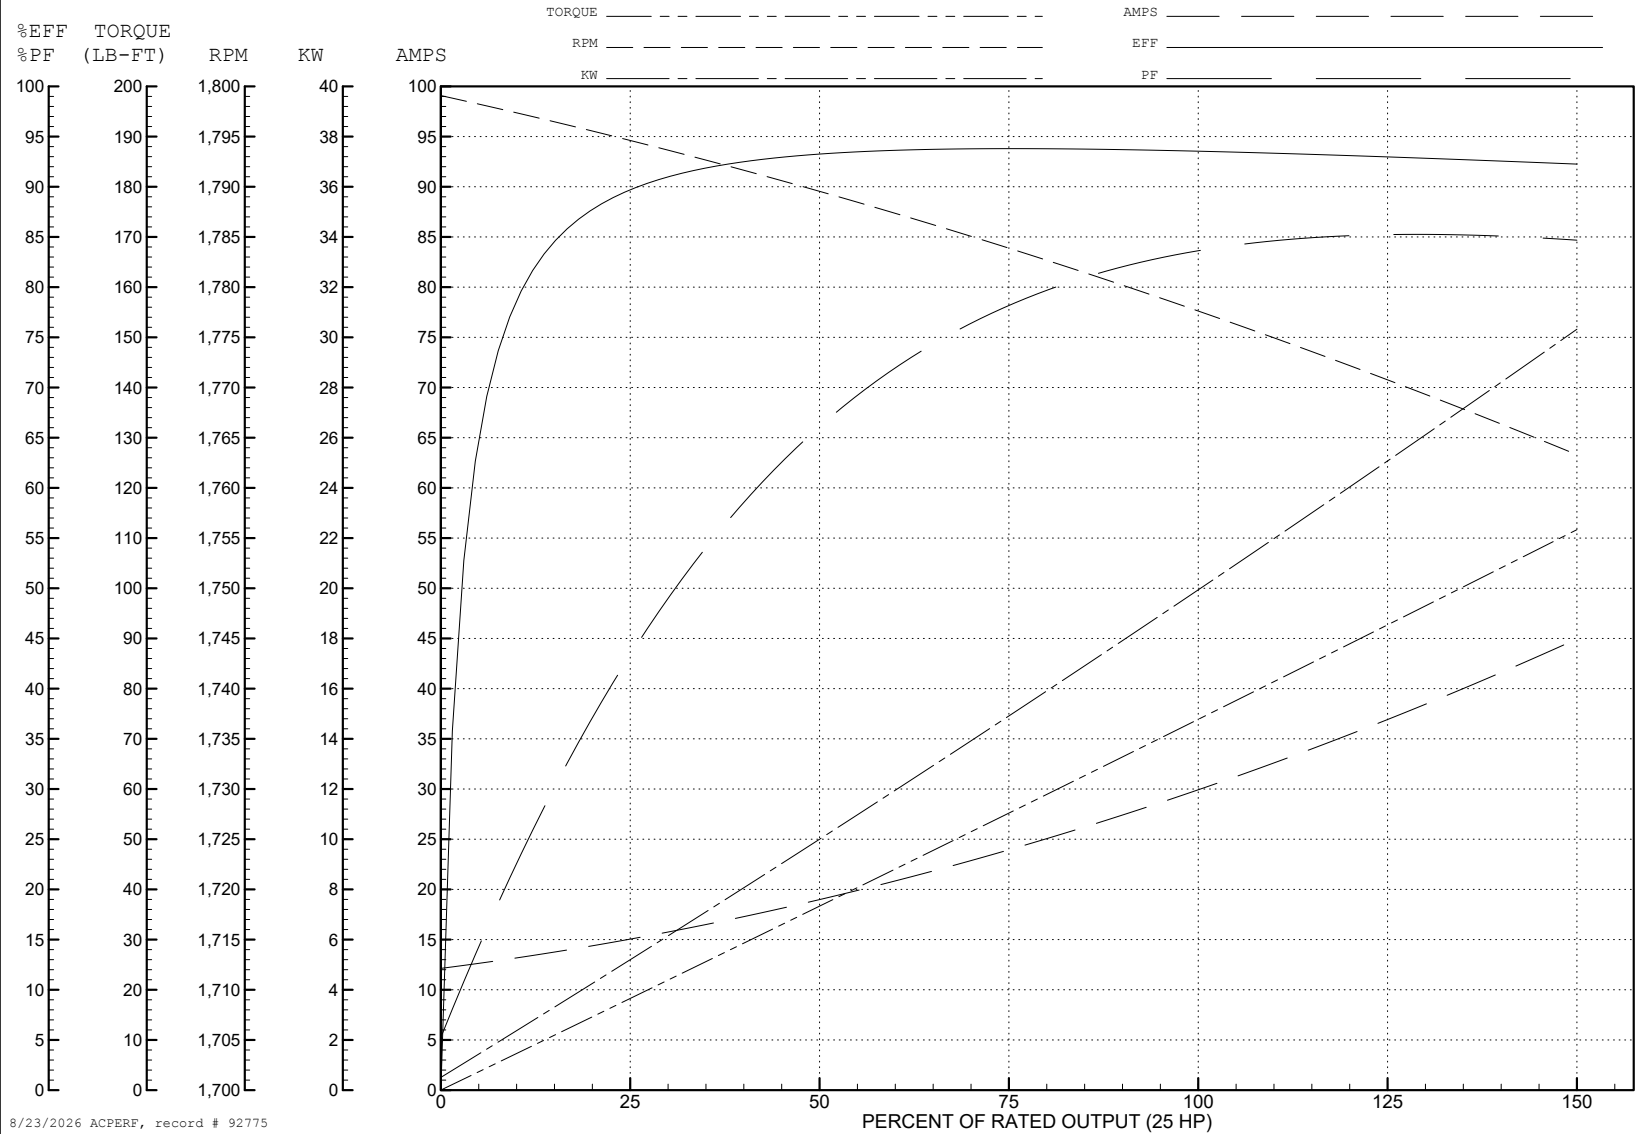

AC Induction Motor Performance Data

Record # 92776

Typical performance - not guaranteed values

Winding: 40WGX806-R004				Type: 4050M		Enclosure: OPSB	
Nameplate Data				415 V, 50 Hz: High Voltage Connection			
Rated Output (HP)		25//20		Full Load Torque		70.85 LB-FT	
Volts		230/460//190/380-415		Start Configuration		direct on line	
Full Load Amps		60/30//58/29-30		Breakdown Torque		267 LB-FT	
R.P.M.		1775//1475		Pull-up Torque		144 LB-FT	
Hz		60//50 Phase		Locked-rotor Torque		165 LB-FT	
NEMA Design Code		A KVA Code		Starting Current		202 A	
Service Factor (S.F.)		1.15		No-load Current		15.76 A	
NEMA Nom. Eff.		93.6 Power Factor		Line-line Res. @ 25°C		0.335 Ω	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		27°C	
S.F. Amps				Temp. Rise @ S.F. Load		32°C	
				Locked-rotor Power Factor		38.7	
				Rotor inertia		3.96 lb-ft²	

Load Characteristics 415 V, 50 Hz, 20 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	56	68	75	80	82	78
Efficiency	87.8	92.2	93.2	93.1	92.7	92	92.9
Speed	1496	1491	1487	1482	1477	1471	1479
Line amperes	17.19	20.25	24.53	29.5	35.11	41.13	32.9

ABB Motors and Mechanical Inc.

WINDING # 40WGX806

Typical performance - not guaranteed values.

20 HP 3 PH 50 HZ 1482 RPM 415 V 4050M

TORQUES (LB-FT): PO=267 PU=144 LR=165 LRA=202

