

ABB BALDOR RELIANCE III

Customer information packet

EHM2539T-8

40HP, 1775RPM, 3PH, 60HZ, 324T, 4250M, OPSB, F1

Specifications

Enclosure	OPSB
Frame	324T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	CSA
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	108.000 A @ 200.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	108.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing

Part Detail

Revision	W
Type	AC
Mech. spec.	42H068
Base	
Status	PRD/A
Elec. spec.	42WGW530
Layout	42LYH068
Eff. date	07-10-2024
CD Diagram	CD0006
Poles	04
Leads	3#4
Proprietary	False
Created date	10-07-2010

Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4250M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	26.69 IN
Power Factor	85
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	2.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	Mounting Provisions Only
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2094E06B03									
CAT.NO.	EHM2539T-8								
SPEC.	42H068W530G1								
HP	40								
VOLTS	200								
AMPS	108								
RPM	1775								
FRAME	324T		HZ	60		PH	3		
SER.F.	1.15	CODE	F	DES	B	CL	F		
NEMA-NOM-EFF	94.1	PF	85						
RATING	40C AMB-CONT								
CC	010A		USABLE AT 208V			N/A			
DE	6312		ODE	6311					
AUTO		MANUAL		NONE					
ENCL	OPSB	SN							
BLANK									

AC Induction Motor Performance Data

Record # 13728

Typical performance - not guaranteed values

Winding: 42GW530-R001			Type: 4250M		Enclosure: OPSB	
Nameplate Data			200 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		40	Full Load Torque		118 LB-FT	
Volts		200	Start Configuration		direct on line	
Full Load Amps		108	Breakdown Torque		304 LB-FT	
R.P.M.		1775	Pull-up Torque		152 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		209 LB-FT
NEMA Design Code		B	KVA Code	F	Starting Current	
Service Factor (S.F.)		1.15	No-load Current		31.5 A	
NEMA Nom. Eff.		94.1	Power Factor	85	Line-line Res. @ 25°C	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		27°C
S.F. Amps				Temp. Rise @ S.F. Load		33°C
				Locked-rotor Power Factor		27
				Rotor inertia		6.66 LB-FT2

Load Characteristics 200 V, 60 Hz, 40 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	55	76	85	84	87	86	86
Efficiency	90.3	93.6	92.4	94.3	93.8	93	94
Speed	1794	1787	1781	1774	1766	1756	1769
Line amperes	44	61	82	108	131	159	121.8


ABB Motors and Mechanical Inc.


WINDING # 42GW530

Typical performance - not guaranteed values.

40 HP 3 PH 60 HZ 1775 RPM 200 V 4250M

TORQUES (LB-FT): PO=304 PU=152 LR=209 LRA=615

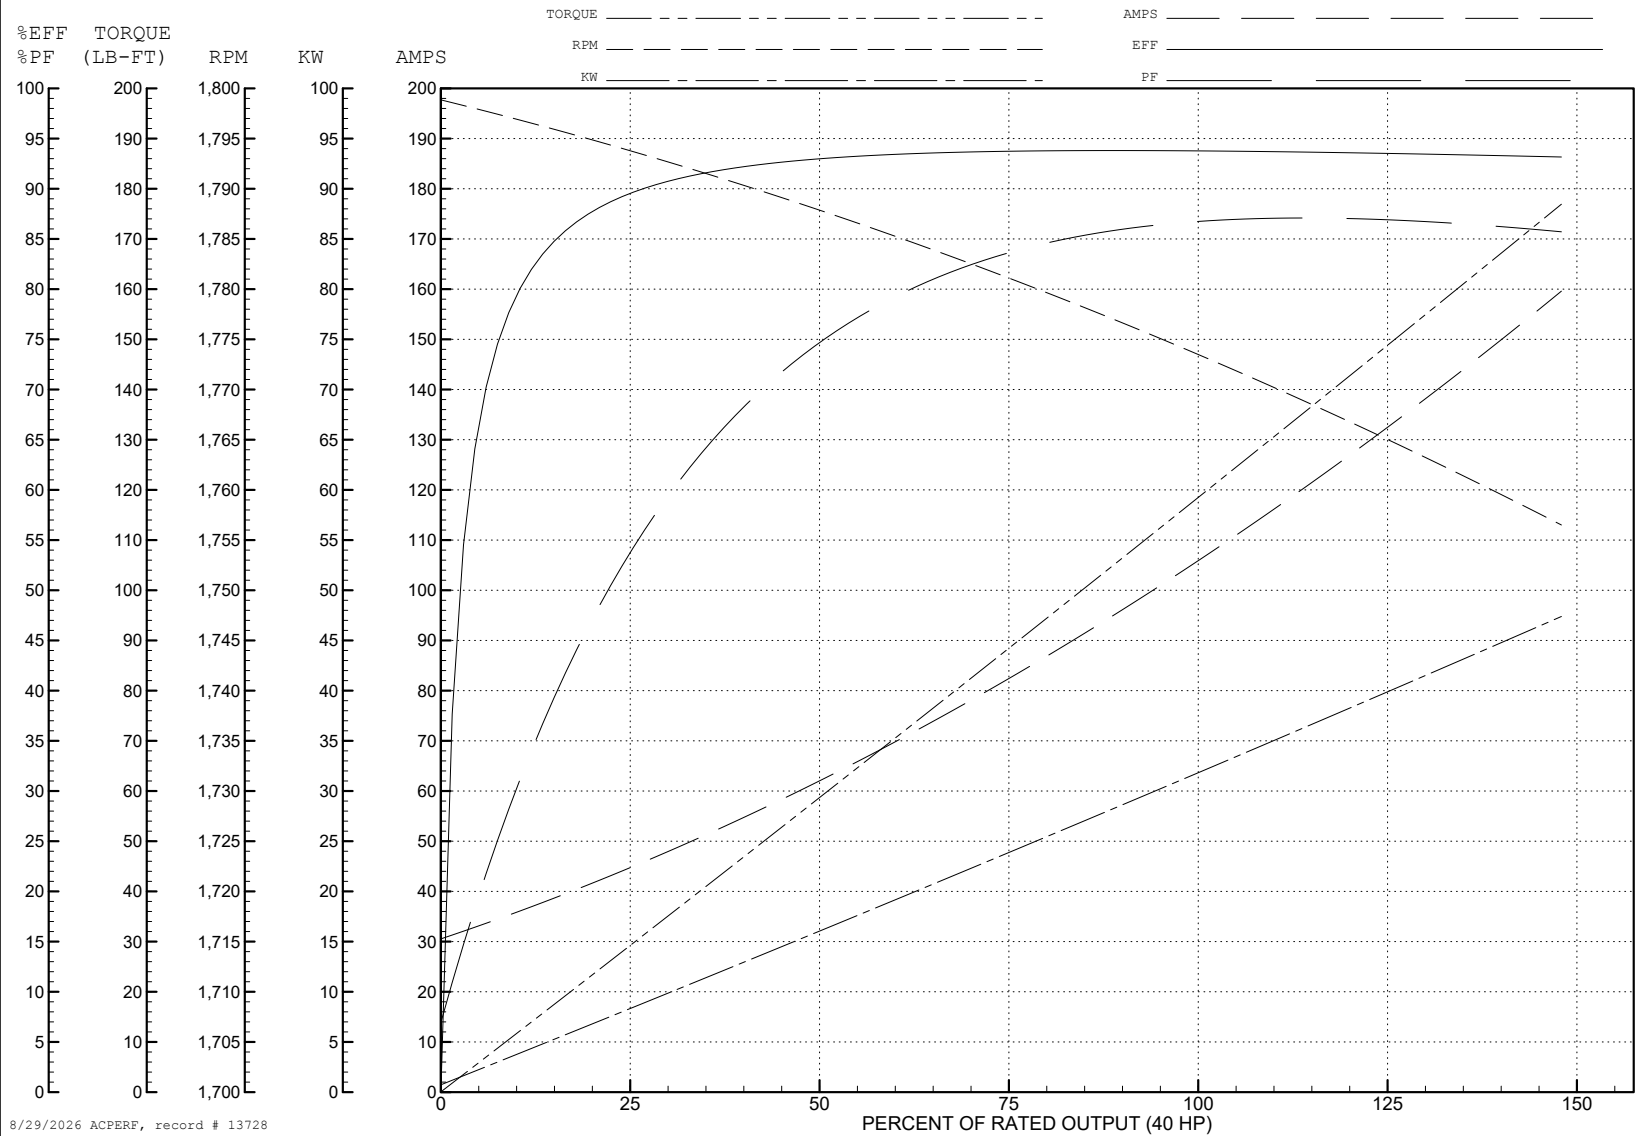

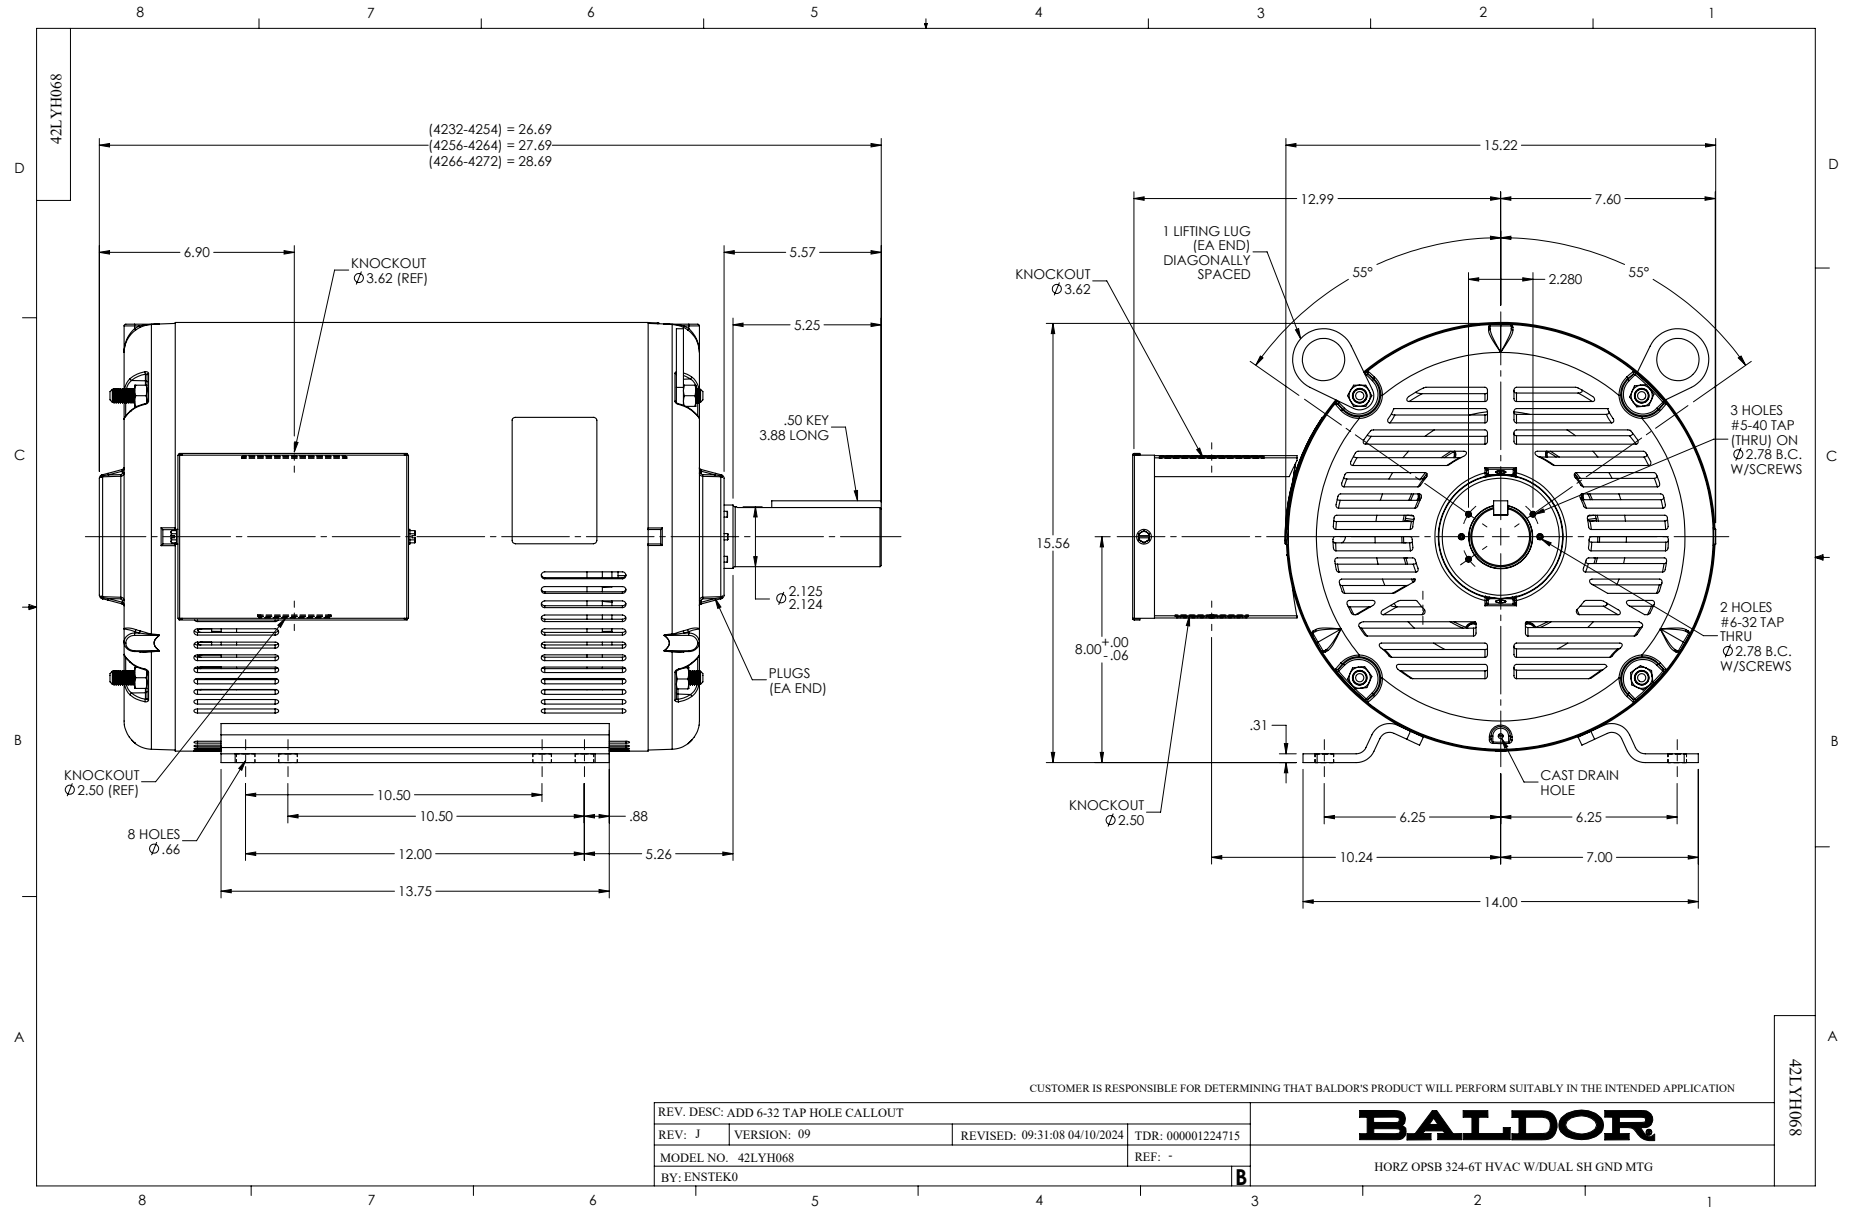

CD0006


NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: -


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1