

ABB BALDOR RELIANCE III

Customer information packet

EJMM4109T

40HP, 3530RPM, 3PH, 60HZ, 324JM, 1058M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	324JM
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	45.000 A @ 460.0 V 90.000 A @ 230.0 V 100.000 A @ 208.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	Y
Type	AC
Mech. spec.	10G863
Base	
Status	PRD/A
Elec. spec.	10WGY652
Layout	10LYG863
Eff. date	06-27-2024
CD Diagram	CD0180
Poles	02
Leads	9#8
Proprietary	False
Created date	04-29-2010

Heater Indicator	No Heater
High Voltage Full Load Amps	45.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1058M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	30.64 IN
Power Factor	90
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.250 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3530 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	NONE (OLD)
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP3443LUA											
CAT.NO.	EJMM4109T			CUST. P/N				ENCL			TEFC
SPEC.	10G863Y652G1	CC	010A	FRAME	324JM	SER.NO.					
HP	40		CLASS	F	HZ	60					
R.P.M.	3530		PH.	3	DES.	A					
VOLTS	230/460		CODE		H	ODE BRG		6309	DE BRG	6312	
AMPS	90/45										
RATING	40C AMB-CONT		NEMA NOM. EFF.			92.4	GREASE		POLYREX EM		
P.F.	90	SER.F.	1.15	CT6-60H(10:1)VT3-60H(20:1							
USABLE AT	50HZ 40HP 190/380V 110/55A			SF1.0							
VOLTS	AMPS	MAX. SPACE HEATER TEMP.									

AC Induction Motor Performance Data

Record # 30898

Typical performance - not guaranteed values

Winding: 10WGY652-R001			Type: 1058M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		40		Full Load Torque		59.5 LB-FT
Volts		230/460		Start Configuration		direct on line
Full Load Amps		90/45		Breakdown Torque		197 LB-FT
R.P.M.		3525		Pull-up Torque		85.4 LB-FT
Hz	60	Phase	3	Locked-rotor Torque		125 LB-FT
NEMA Design Code		A	KVA Code	Starting Current		324 A
Service Factor (S.F.)		1.15		No-load Current		12 A
NEMA Nom. Eff.		92.4	Power Factor	Line-line Res. @ 25°C		0.159 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		78°C
S.F. Amps				Temp. Rise @ S.F. Load		96°C
				Locked-rotor Power Factor		22.8
				Rotor inertia		2.49 LB-FT2

Load Characteristics 460 V, 60 Hz, 40 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	65	82	88	90	90	91	90
Efficiency	88.6	92	92.8	92.6	91.9	90.8	92.7
Speed	3583	3567	3550	3531	3511	3485	3519
Line amperes	16.3	24.7	34.3	45.1	56.3	70.6	51.8


ABB Motors and Mechanical Inc.


WINDING # 10WGY652

Typical performance - not guaranteed values.

40 HP 3 PH 60 HZ 3525 RPM 460 V 1058M

TORQUES (LB-FT): PO=197 PU=85.4 LR=125 LRA=324

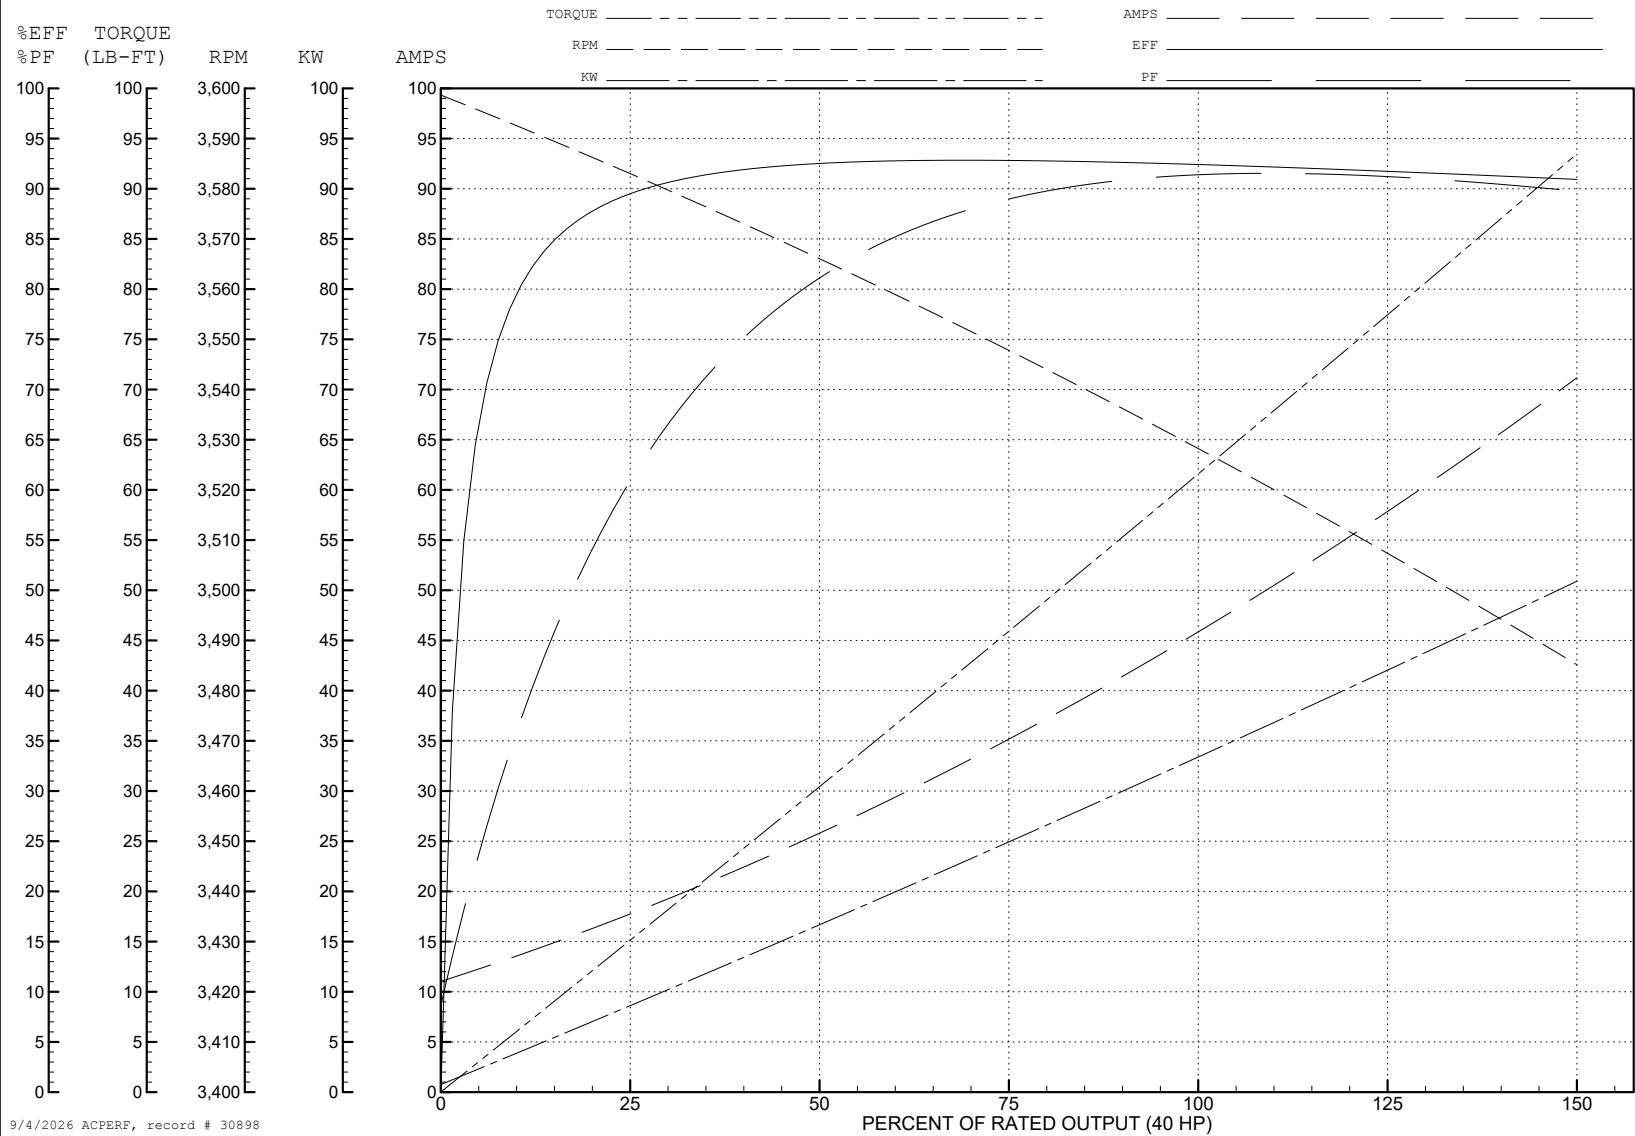


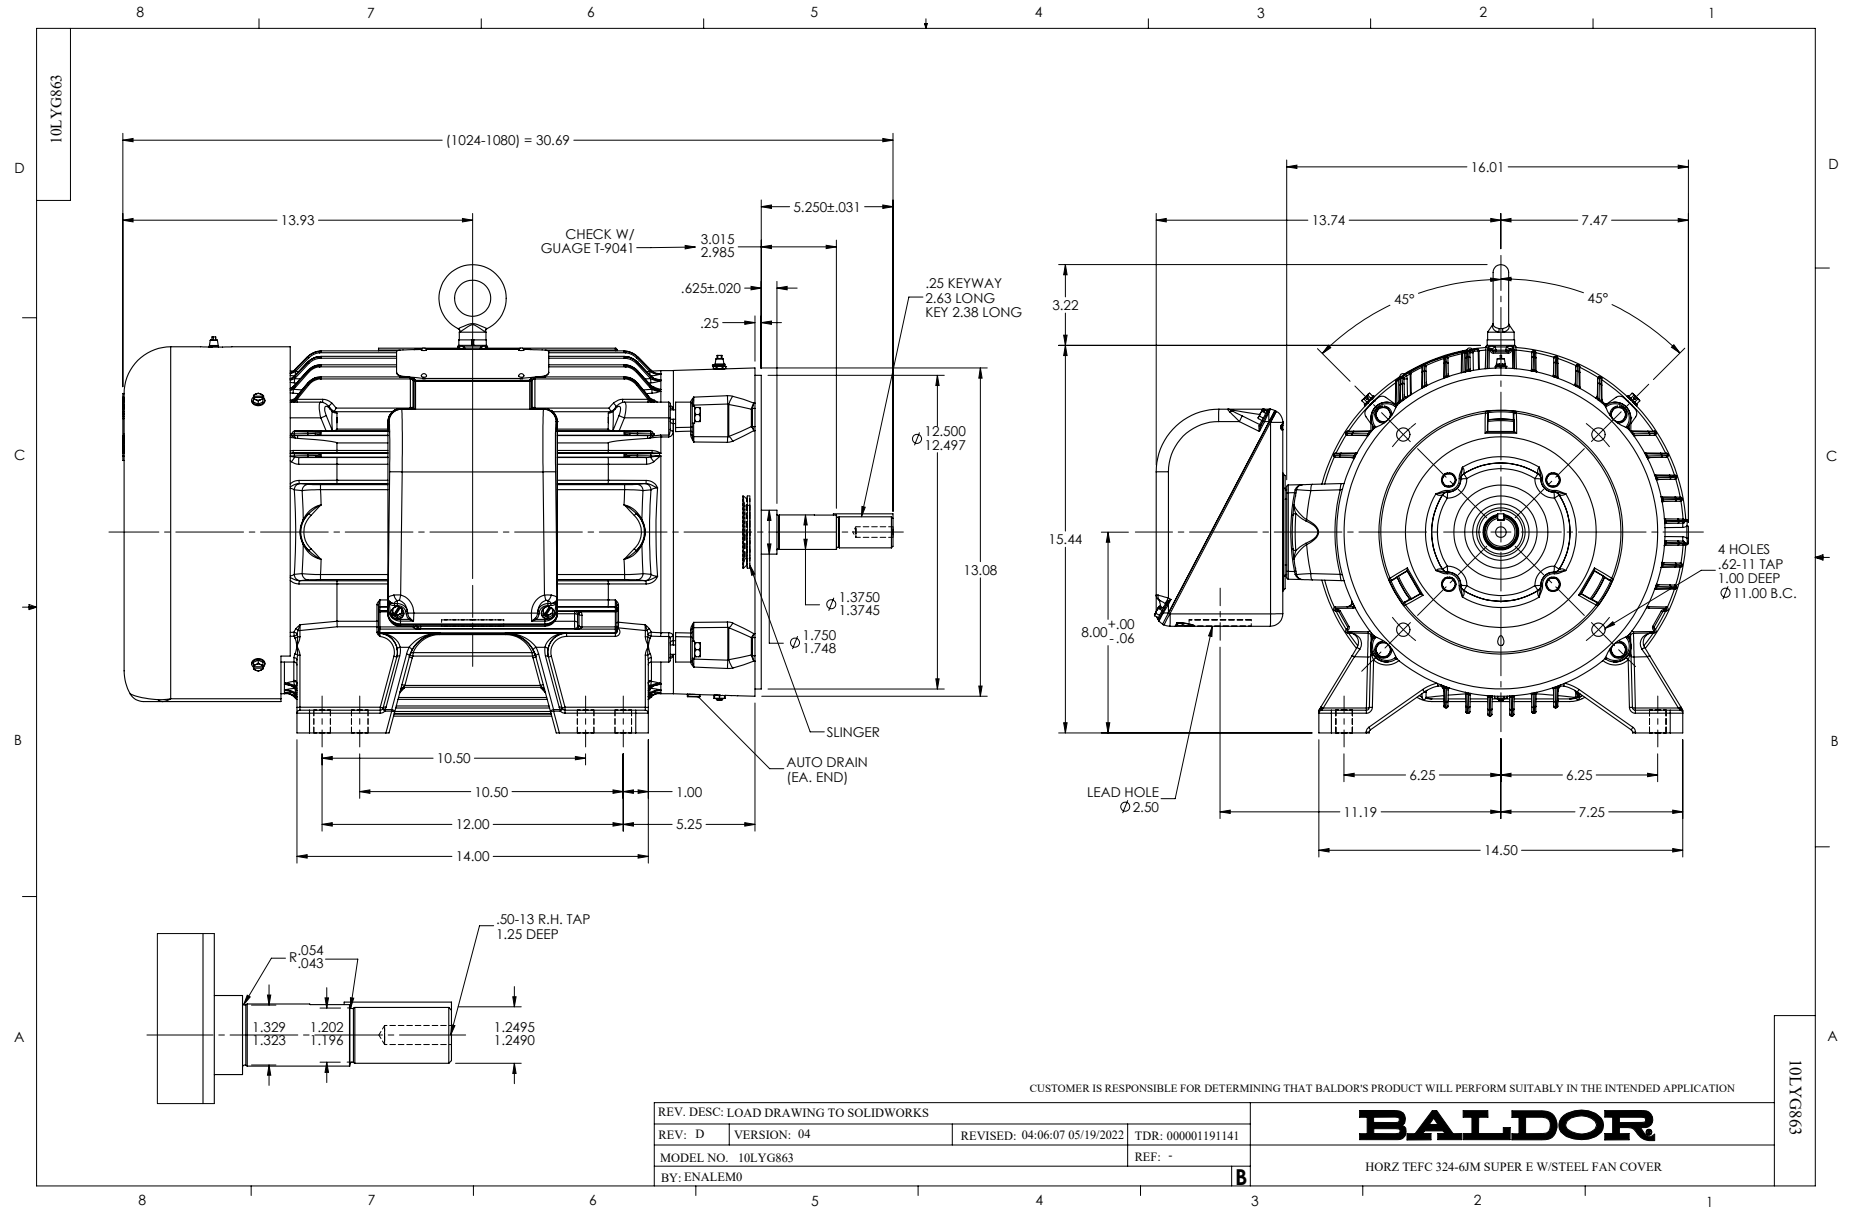


CD0180



LOW VOLTAGE
(2D)



HIGH VOLTAGE
(1D)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1