



---

# Customer information packet

## EJPM3713T

15HP, 3500RPM, 3PH, 60HZ, 215JP, 3752M, TEFC, F

Class - None

Division - Not Applicable

## Specifications

Enclosure	TEFC
Frame	215JP
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	34.000 A @ 230.0 V 36.800 A @ 208.0 V 17.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

## Part detail

Revision	L
Type	AC
Mech. spec.	37L079
Base	
Status	PRD/A
Elec. spec.	37WGR228
Layout	37LYL079
Eff. date	05-02-2024
CD Diagram	CD0180
Poles	02
Leads	9#14
Proprietary	False
Created date	05-19-2015

Heater Indicator	No Heater
High Voltage Full Load Amps	17.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3752M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	26.29 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.250 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

**Winding Thermal 2**

**None**

---

**Nameplate**

**NP3441LUA**

<b>CAT.NO.</b>	EJPM3713T						
<b>SPEC</b>	37L079R228G2						
<b>HP</b>	15						
<b>VOLTS</b>	230/460						
<b>AMPS</b>	34/17						
<b>RPM</b>	3500						
<b>FRAME</b>	215JP	<b>HZ</b>	60	<b>PH</b>	3		
<b>SF</b>	1.15	<b>CODE</b>	J	<b>DES</b>	A	<b>CLASS</b>	F
<b>NEMA NOM. EFF</b>	91	<b>PF</b>	89				
<b>RATING</b>	40C AMB-CONT						
<b>CC</b>	010A						
<b>ENCL</b>	TEFC	<b>SER</b>					
<b>DE</b>	6309	<b>ODE</b>	6206				
<b>VPWM INVERTER READY</b>							
<b>CT6-60H(10:1)VT3-60H(20:1</b>	50Hz 15HP 190/380V 40.8/20.4A						SF1.0

**AC Induction Motor Performance Data**

Record # 53380

Typical performance - not guaranteed values

Winding: 37WGR228-R023		Type: 3752M	Enclosure: TEFC
<b>Nameplate Data</b>		<b>460 V, 60 Hz: High Voltage Connection</b>	
Rated Output (HP)	15	Full Load Torque	22.12 LB-FT
Volts	230/460	Start Configuration	direct on line
Full Load Amps	34/17	Breakdown Torque	103 LB-FT
R.P.M.	3500	Pull-up Torque	40.16 LB-FT
Hz	60 Phase	Locked-rotor Torque	57.59 LB-FT
NEMA Design Code	A KVA Code	Starting Current	150 A
Service Factor (S.F.)	1.15	No-load Current	5.55 A
NEMA Nom. Eff.	91 Power Factor	Line-line Res. @ 25°C	0.47 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	68°C
S.F. Amps		Temp. Rise @ S.F. Load	79°C
		Locked-rotor Power Factor	30.9
		Rotor inertia	0.474 LB-FT <sup>2</sup>

**Load Characteristics 460 V, 60 Hz, 15 HP**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	78	85	89	90	90	89
Efficiency	86.8	91	91.9	91.4	90.8	89.8	91.3
Speed	3579	3557	3534	3500	3484	3456	3495
Line amperes	6.7	9.57	13.19	17.03	21.12	25.61	19.5


ABB Motors and Mechanical Inc.

WINDING # 37WGR228

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 3500 RPM 460 V 3752M

TORQUES (LB-FT): PO=103 PU=40.16 LR=57.59 LRA=150

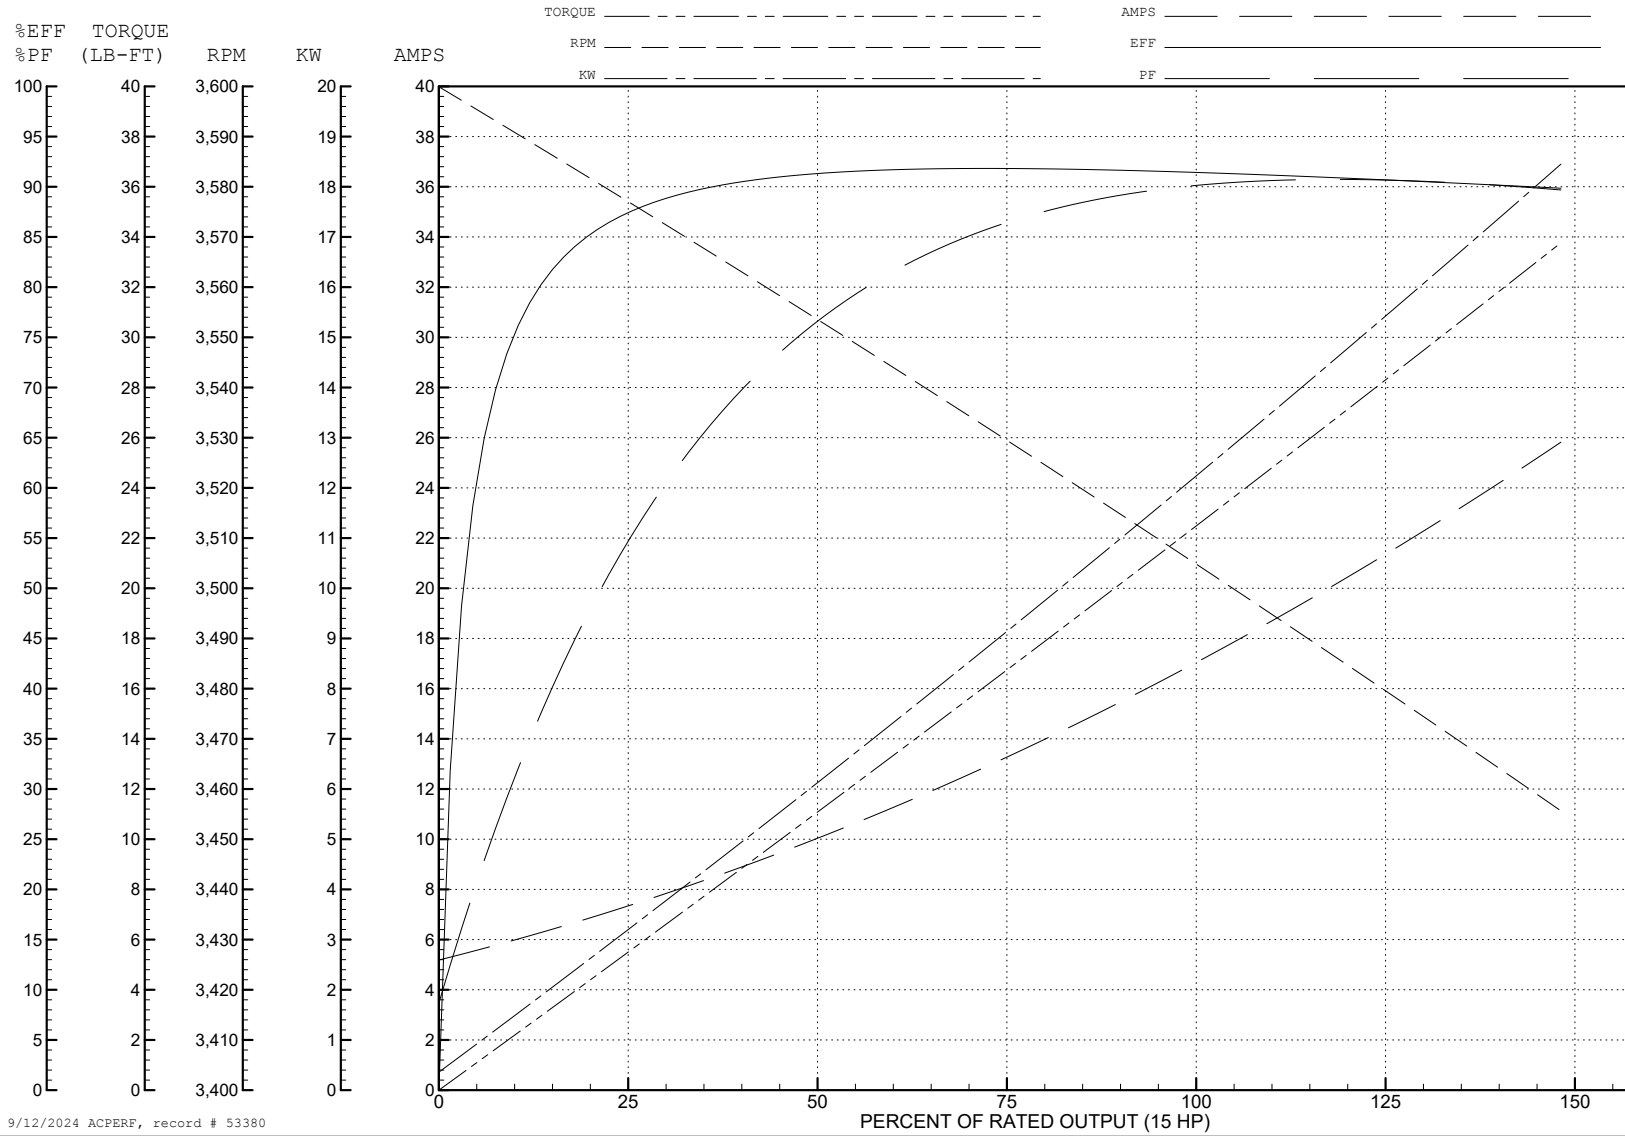

9/12/2024 ACPERF, record # 53380

**AC Induction Motor Performance Data**

Record # 57899

Typical performance - not guaranteed values

Winding: 37WGR228-R023		Type: 3752M	Enclosure: TEFC
<b>Nameplate Data</b>		<b>230 V, 60 Hz: Low Voltage Connection</b>	
Rated Output (HP)	15	Full Load Torque	22.1 LB-FT
Volts	230/460	Start Configuration	direct on line
Full Load Amps	34/17	Breakdown Torque	104 LB-FT
R.P.M.	3500	Pull-up Torque	40.3 LB-FT
Hz	60 Phase	Locked-rotor Torque	57.8 LB-FT
NEMA Design Code	A KVA Code	Starting Current	300 A
Service Factor (S.F.)	1.15	No-load Current	11.1 A
NEMA Nom. Eff.	91 Power Factor	Line-line Res. @ 25°C	0.111 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	67°C
S.F. Amps		Temp. Rise @ S.F. Load	82°C
		Locked-rotor Power Factor	30.3
		Rotor inertia	0.474 LB-FT <sup>2</sup>

**Load Characteristics 230 V, 60 Hz, 15 HP**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	77	85	89	90	90	90
Efficiency	86.8	91.1	92	91.8	91	90	91.3
Speed	3579	3558	3534	3510	3485	3456	3495
Line amperes	13.4	19.1	26.4	34	42.2	51.2	38.9




ABB Motors and Mechanical Inc.

WINDING # 37WGR228

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 3500 RPM 230 V 3752M

TORQUES (LB-FT): PO=104 PU=40.3 LR=57.8 LRA=300

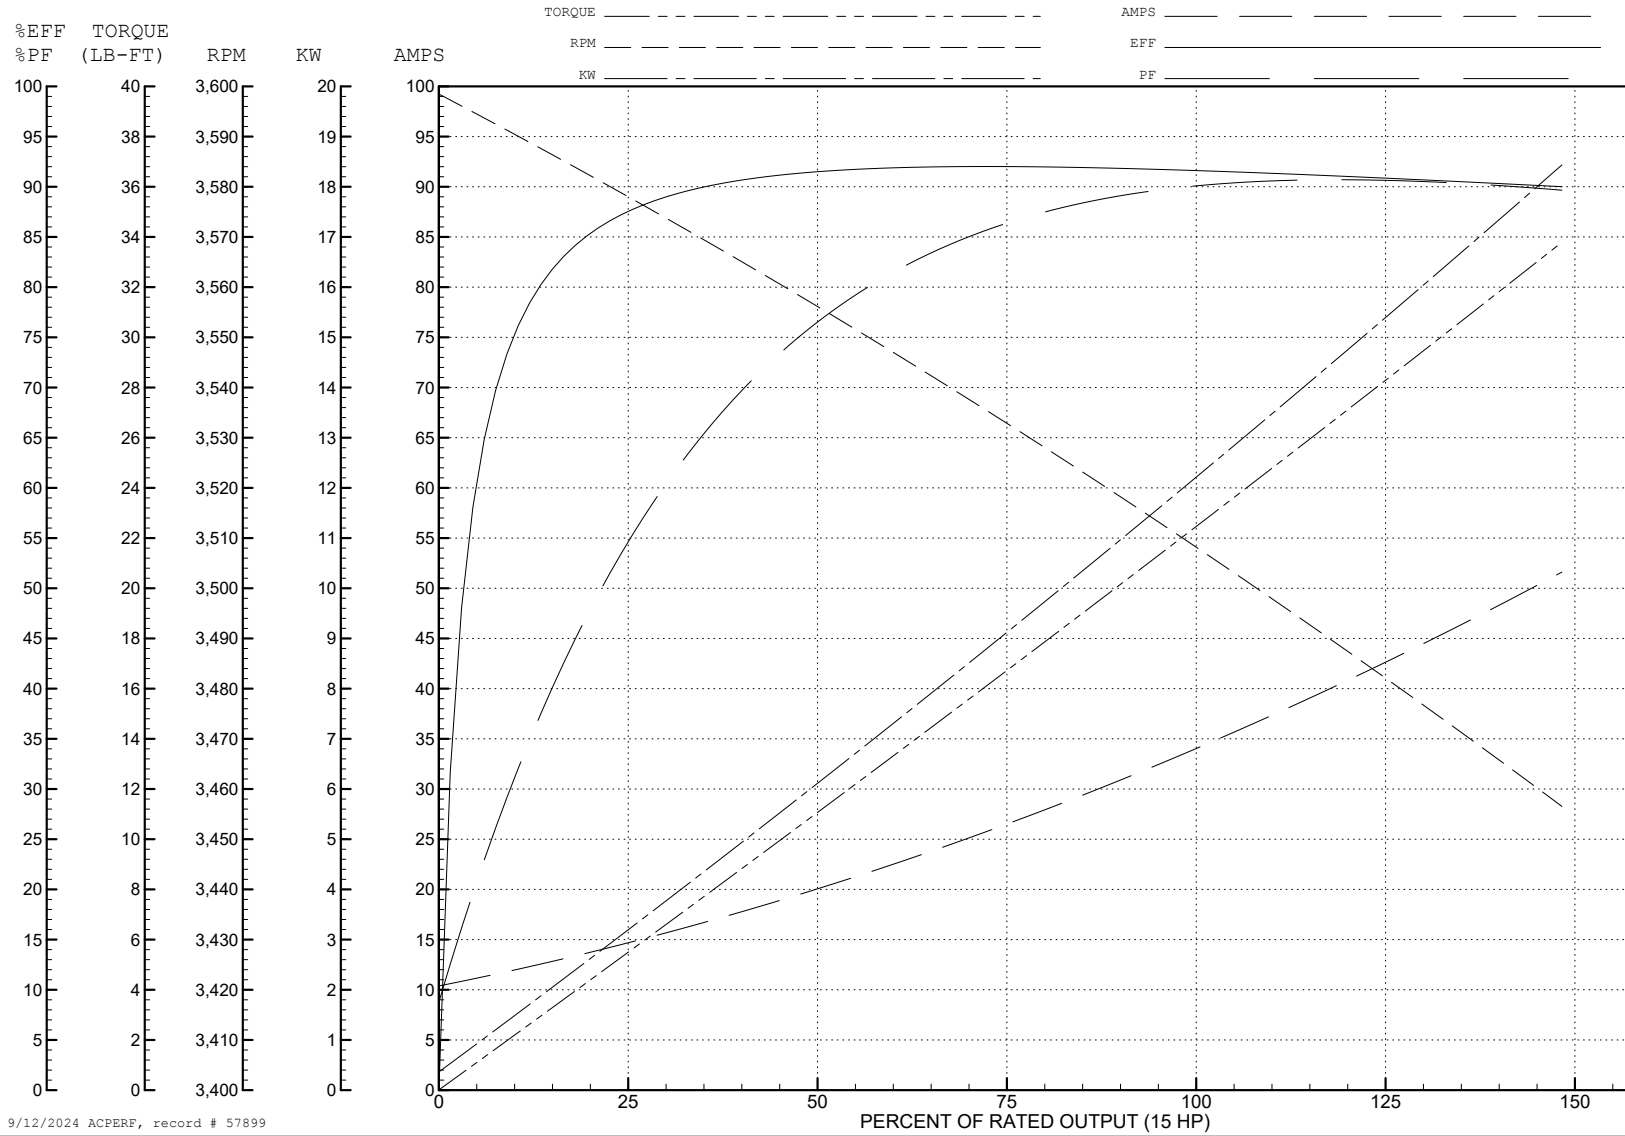

9/12/2024 ACPERF, record # 57899

**AC Induction Motor Performance Data**

Record # 70097

Typical performance - not guaranteed values

Winding: 37WGR228-RXXX		Type: 3752M	Enclosure: TEFC	
<b>Nameplate Data</b>			<b>380 V, 50 Hz: High Voltage Connection</b>	
Rated Output (HP)	15	Full Load Torque	17.68 LB-FT	
Volts	230/460	Start Configuration	direct on line	
Full Load Amps	34/17	Breakdown Torque	98.71 LB-FT	
R.P.M.	3500	Pull-up Torque	42.31 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque	60.68 LB-FT
NEMA Design Code	A KVA Code	J	Starting Current	146 A
Service Factor (S.F.)	1.15	No-load Current	5.43 A	
NEMA Nom. Eff.	91 Power Factor	89	Line-line Res. @ 25°C	0.47 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	52°C	
S.F. Amps		Temp. Rise @ S.F. Load	63°C	
		Locked-rotor Power Factor	34.6	
		Rotor inertia	0.474 LB-FT <sup>2</sup>	

**Load Characteristics 380 V, 50 Hz, 10 HP**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	73	82	87	89	90	88
Efficiency	81.7	88	89.8	89.9	89.6	88.9	89.7
Speed	2982	2964	2945	2918	2905	2883	2910
Line amperes	6.27	8.45	11.29	14.27	17.46	20.98	16.2


ABB Motors and Mechanical Inc.

WINDING # 37WGR228

Typical performance - not guaranteed values.

10 HP 3 PH 50 HZ 3500 RPM 380 V 3752M

TORQUES (LB-FT): PO=98.71 PU=42.31 LR=60.68 LRA=146

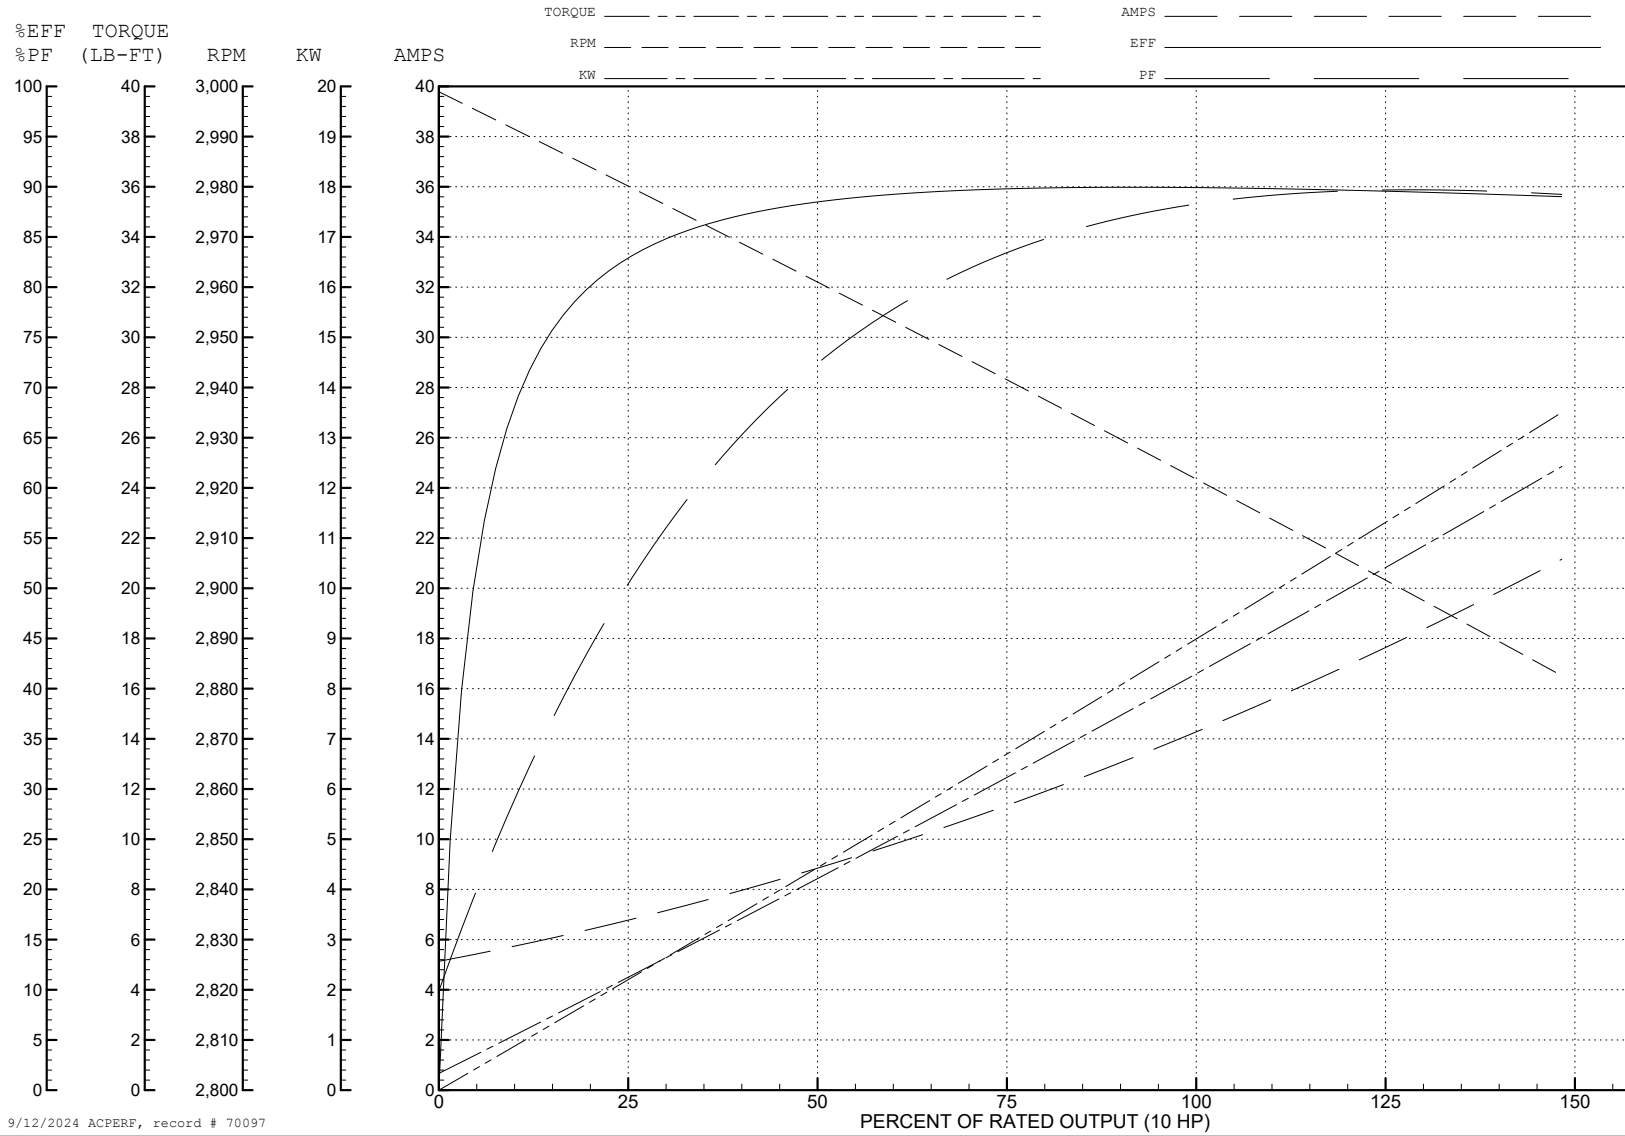

9/12/2024 ACPERF, record # 70097

**AC Induction Motor Performance Data**

Record # 73419

Typical performance - not guaranteed values

<b>Winding: 37WGR228-RXXX</b>		<b>Type: 3752M</b>		<b>Enclosure: TEFC</b>	
<b>Nameplate Data</b>			<b>480 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	15	<b>Full Load Torque</b>	22.12 LB-FT		
<b>Volts</b>	230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	34/17	<b>Breakdown Torque</b>	113 LB-FT		
<b>R.P.M.</b>	3500	<b>Pull-up Torque</b>	44.76 LB-FT		
<b>Hz</b>	60	<b>Phase</b>	3	<b>Locked-rotor Torque</b>	64.18 LB-FT
<b>NEMA Design Code</b>	A	<b>KVA Code</b>	J	<b>Starting Current</b>	159 A
<b>Service Factor (S.F.)</b>	1.15	<b>No-load Current</b>	6.32 A		
<b>NEMA Nom. Eff.</b>	91	<b>Power Factor</b>	89	<b>Line-line Res. @ 25°C</b>	0.47 Ω
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	67°C	
<b>S.F. Amps</b>			<b>Temp. Rise @ S.F. Load</b>	83°C	
			<b>Locked-rotor Power Factor</b>	31.2	
			<b>Rotor inertia</b>	0.474 LB-FT <sup>2</sup>	

**Load Characteristics 480 V, 60 Hz, 15 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	50	72	82	86	88	89	87
<b>Efficiency</b>	86.2	90.7	91.8	91.5	90.9	90.1	91.1
<b>Speed</b>	3580	3560	3538	3506	3491	3465	3497
<b>Line amperes</b>	7.28	9.85	13.18	16.77	20.58	24.75	19.1


ABB Motors and Mechanical Inc.

WINDING # 37WGR228


Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 3500 RPM 480 V 3752M


TORQUES (LB-FT): PO=113 PU=44.76 LR=64.18 LRA=159

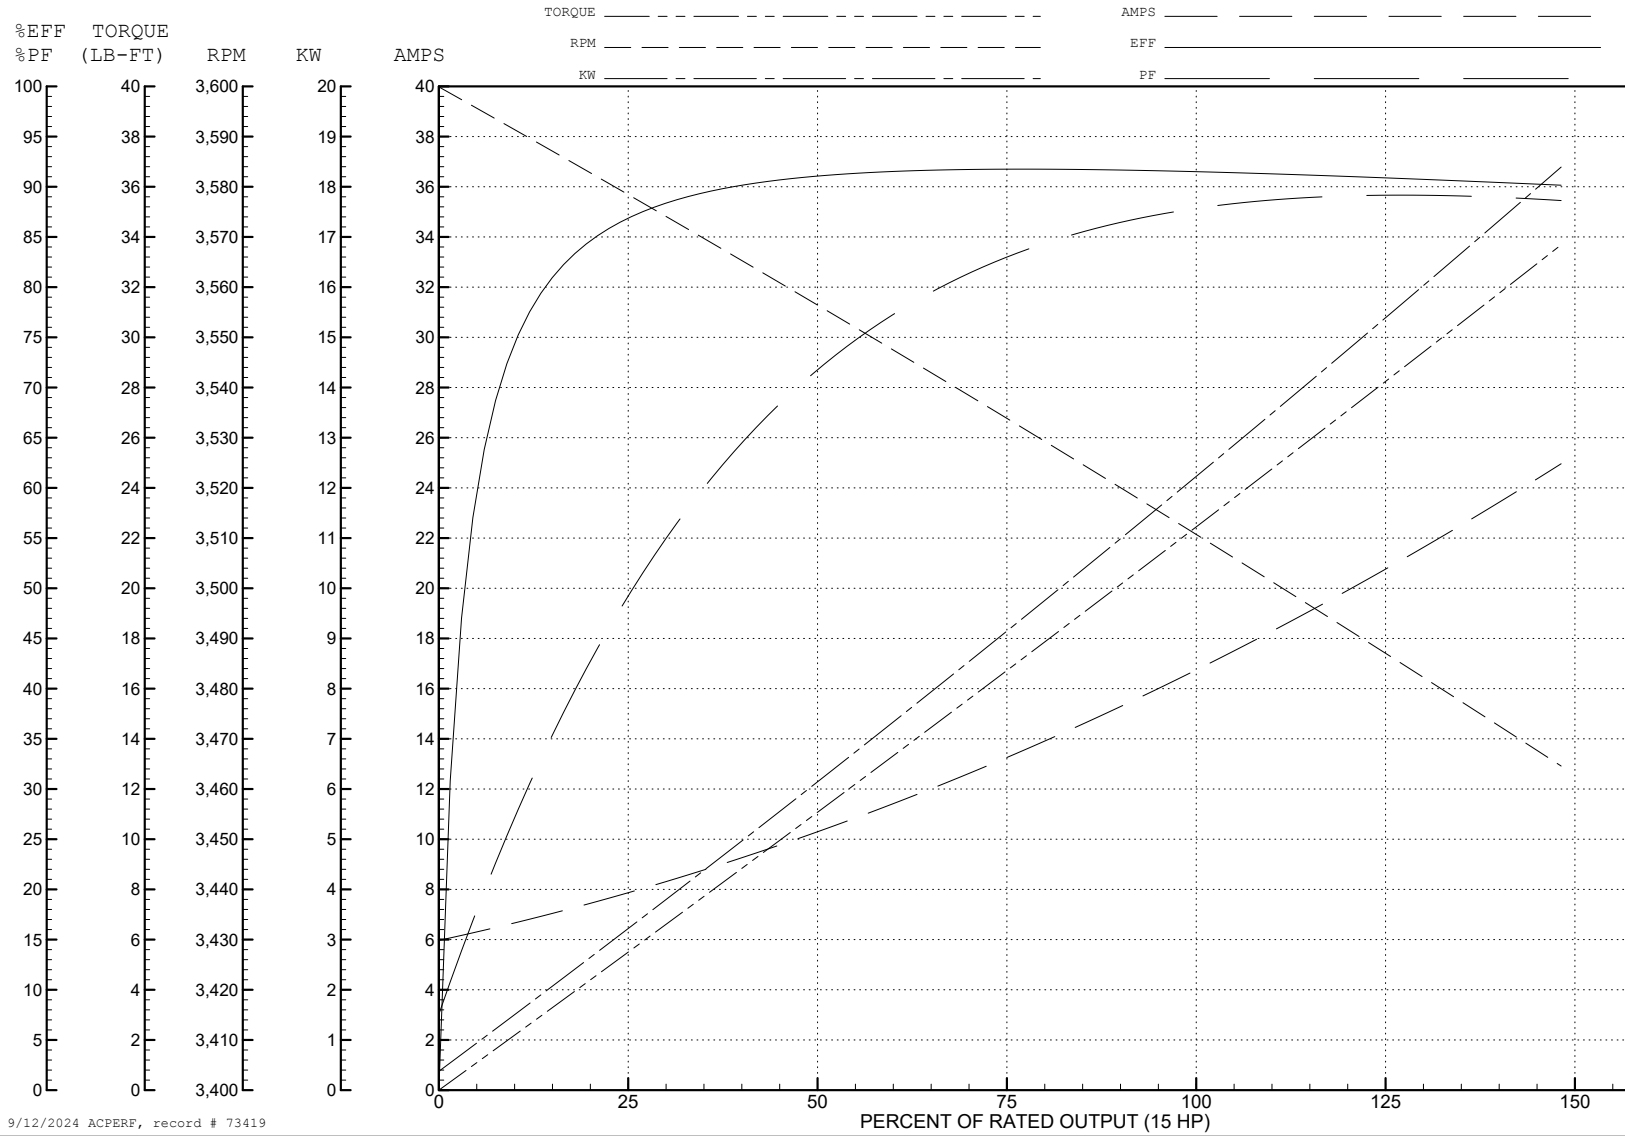


9/12/2024 ACPERF, record # 73419

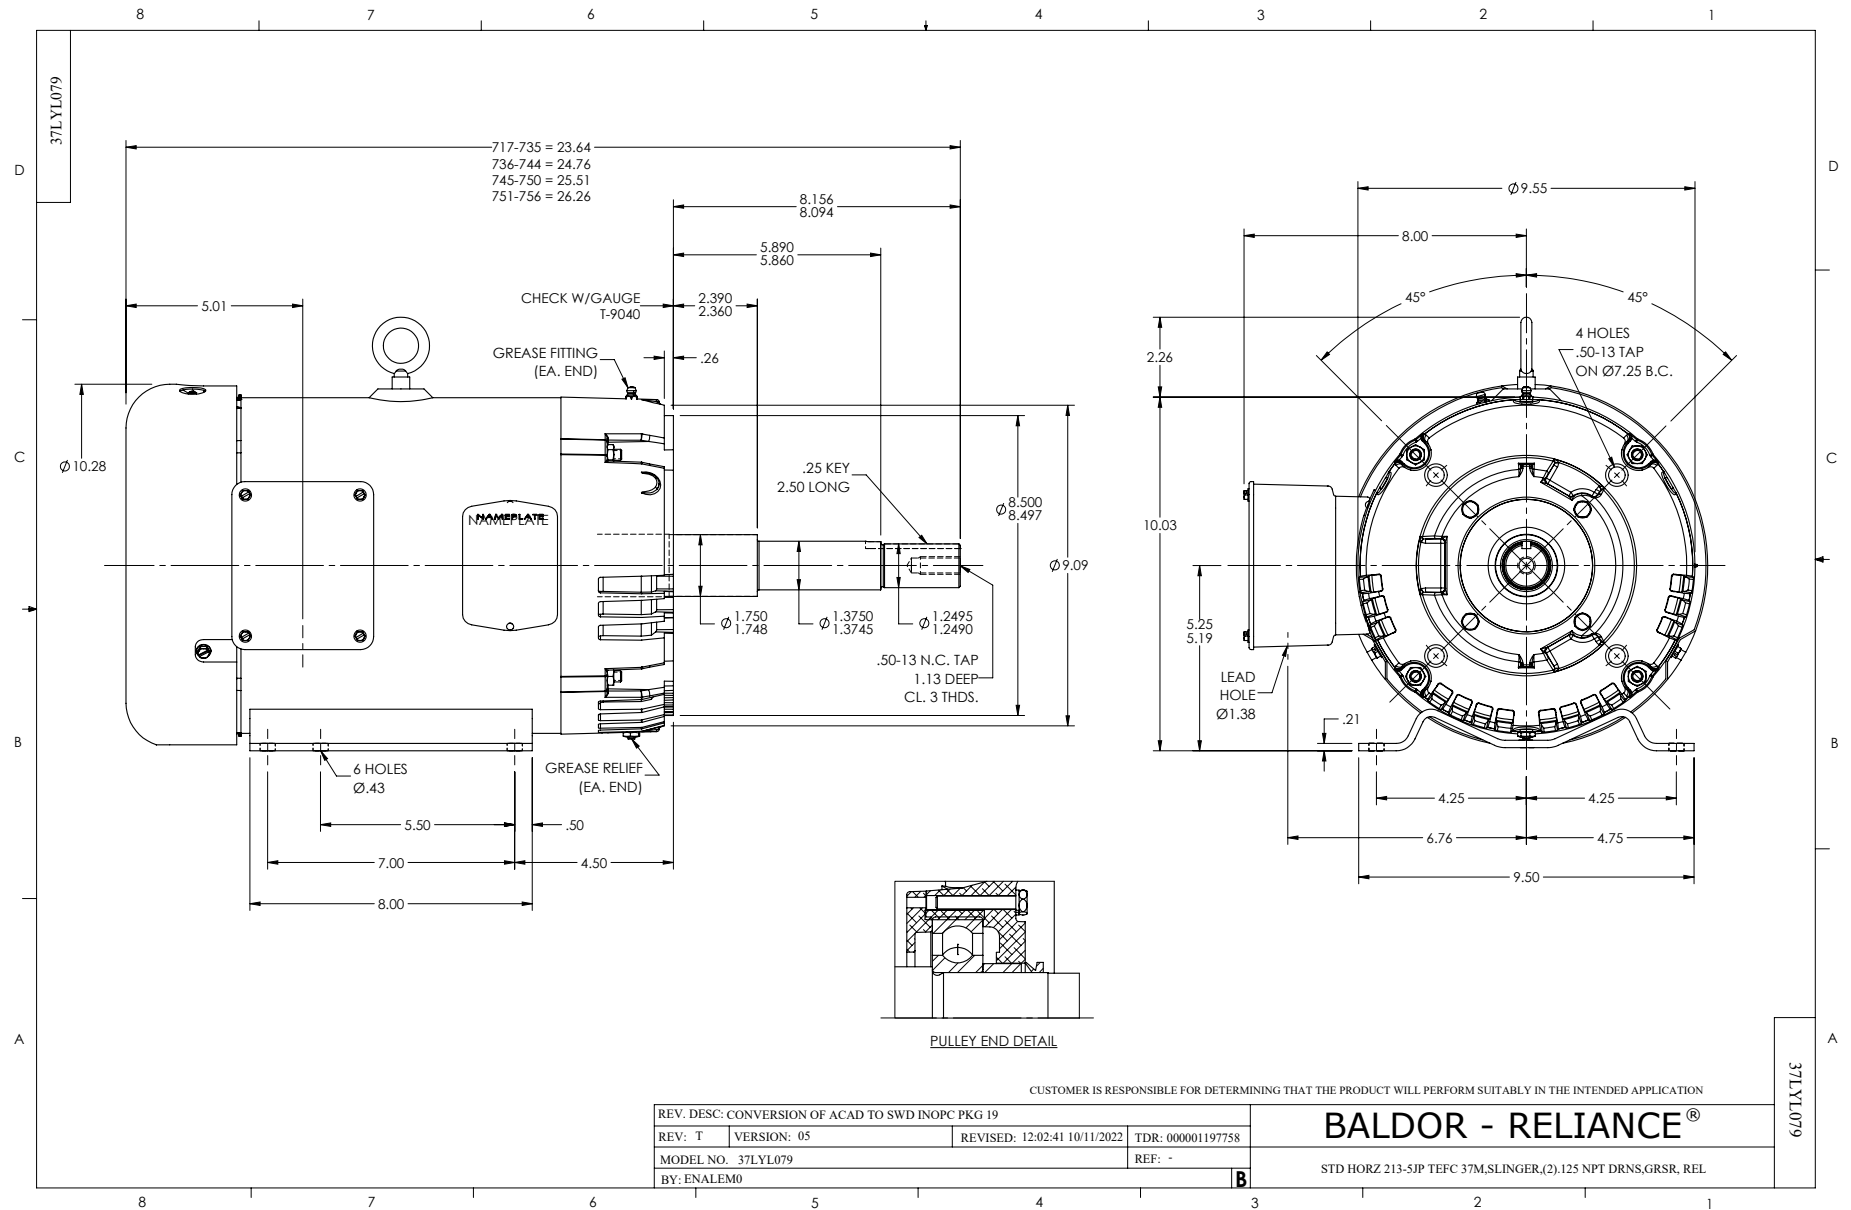


CD0180

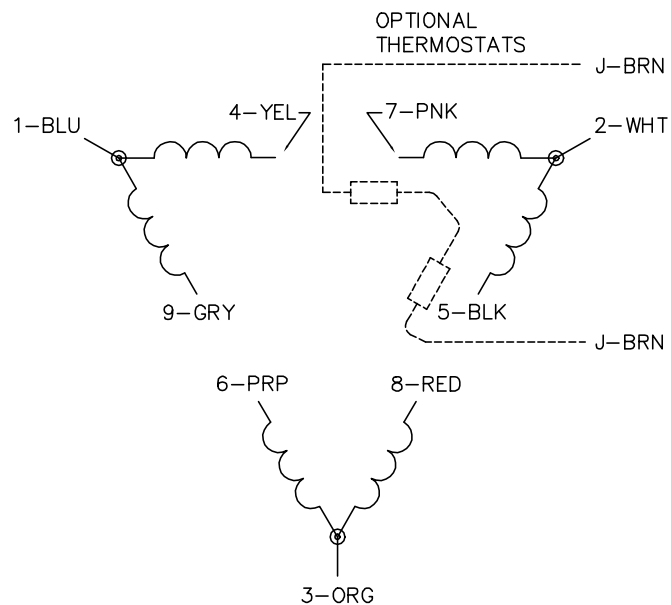

LOW VOLTAGE  
(2D)

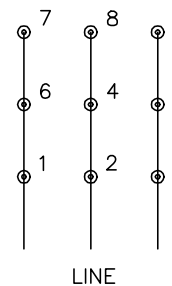

HIGH VOLTAGE  
(1D)

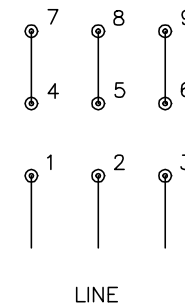

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10: 25: 29 02/19/2019	BY: ENBRIRO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1