

ABB BALDOR RELIANCE III

Customer information packet

EL11205

.33HP, 3475RPM, 1PH, 60HZ, 48, 3413LC, ODP, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	ODP
Frame	48
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.500 A @ 230.0 V 3.000 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	70.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	F

Part Detail

Revision	M
Type	AC
Mech. spec.	34F351
Base	
Status	PRD/A
Elec. spec.	34WGR144
Layout	34LYF351
Eff. date	12-31-2024
CD Diagram	CD0055
Poles	02
Leads	6#18
Proprietary	False
Created date	03-05-2014

Inverter Code	Not Inverter
KVA Code	H
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3413LC
Mounting Arrangement	F1
Number of Poles	2
Overall Length	9.76 IN
Power Factor	97
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.500 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3475 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3155L											
CAT.NO.	EL11205										
SPEC.	34F351R144G1										
HP	.33										
VOLTS	115/230										
AMP	3/1.5										
RPM	3475										
FRAME	48		HZ	60				PH	1		
SER.F.	1.35	CODE	H	DES	N	CL	F				
F.L. AVG. EFF.	70.5	PF	97								
RATING	40C AMB-CONT										
CC											
DE	6203		ODE	6203							
ENCL	ODP	SN									
	SFA 3.9/1.95										

AC Induction Motor Performance Data

Record # 45445

Typical performance - not guaranteed values

Winding: 34WGR144-R001			Type: 3413LC		Enclosure: OPEN		
Nameplate Data			115 V, 60 Hz: Low Voltage Connection				
Rated Output (HP)		.33	Full Load Torque		0.495 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		3/1.5	Breakdown Torque		1.37 LB-FT		
R.P.M.		3475	Pull-up Torque		1.11 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		1.63 LB-FT	
NEMA Design Code		N	KVA Code	H	Starting Current		21.7 A
Service Factor (S.F.)		1.35		No-load Current		0.91 A	
NEMA Nom. Eff.		70.5	Power Factor	97	Line-line Res. @ 25°C		1.8711 Ω A Ph 3.6847 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		14°C	
S.F. Amps		3.9/1.95		Temp. Rise @ S.F. Load		17°C	

Load Characteristics 115 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	97	98	98	99	99	98	99
Efficiency	43.3	61.5	70.3	74.5	76.4	77.7	76.9
Speed	3567.1	3549.9	3526.5	3501.3	3474.4	3445.4	3463
Line amperes	1.29	1.76	2.32	2.91	3.54	4.2	3.8


ABB Motors and Mechanical Inc.

WINDING # 34WGR144

Typical performance - not guaranteed values.

0.33 HP 1 PH 60 HZ 3475 RPM 115 V 3413LC

TORQUES (LB-FT): PO=1.37 PU=1.11 LR=1.63 LRA=21.7

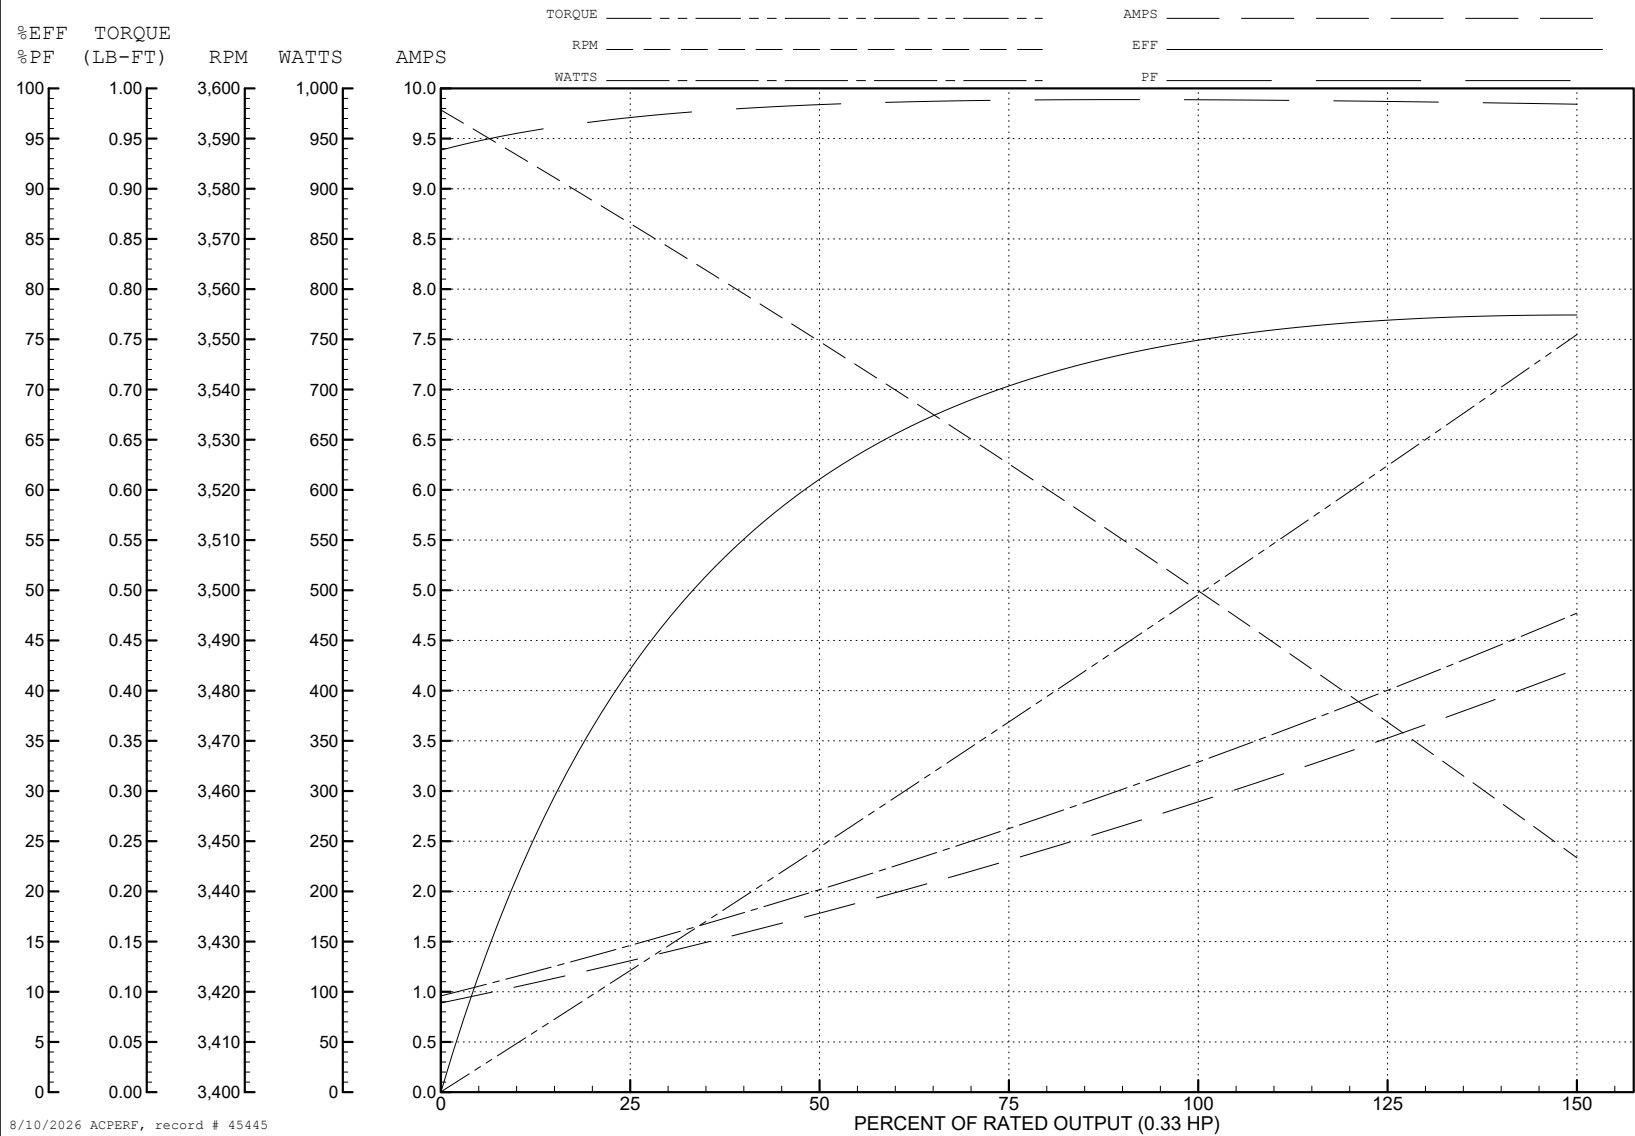



CD0055

