ABB BALDOR RELIANCE

Customer information packet

EL1301

.33HP, 1740RPM, 1PH, 60HZ, 56, 3418LC, OPEN, F1
Class -
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/18/2026 5:19:53 PM

Specifications

Enclosure	ODP
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	115.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	RG
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.600 A @ 230.0 V
	3.200 A @ 115.0 V
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	77.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.6 a
Insulation Class	F


Part Detail

Revision	AD
Type	AC
Mech. spec.	34F353
Base	
Status	NLA/A
Elec. spec.	34WGW954
Layout	34LYF353
Eff. date	01-21-2015
CD Diagram	CD0055
Poles	04
Leads	6#18
Proprietary	False
Created date	01-01-0001


Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3418LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	10.13 IN
Power Factor	88
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1740 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Nameplate

NP2117L								
CAT.NO.	EL1301							
SPEC.	34F353W954G1							
HP	.33							
VOLTS	115/230							
AMP	3.2/1.6							
RPM	1740							
FRAME	56	**HZ**	60	**PH**	1			
SER.F.	1.35	**CODE**	J	**DES**	-	**CL**	F	
NEMA-NOM-EFF	77	**PF**	88					
RATING	40C AMB-CONT							
CC								
DE	6203	**ODE**	6203					
ENCL	OPEN	**SN**						
	SFA 4.2/2.1							

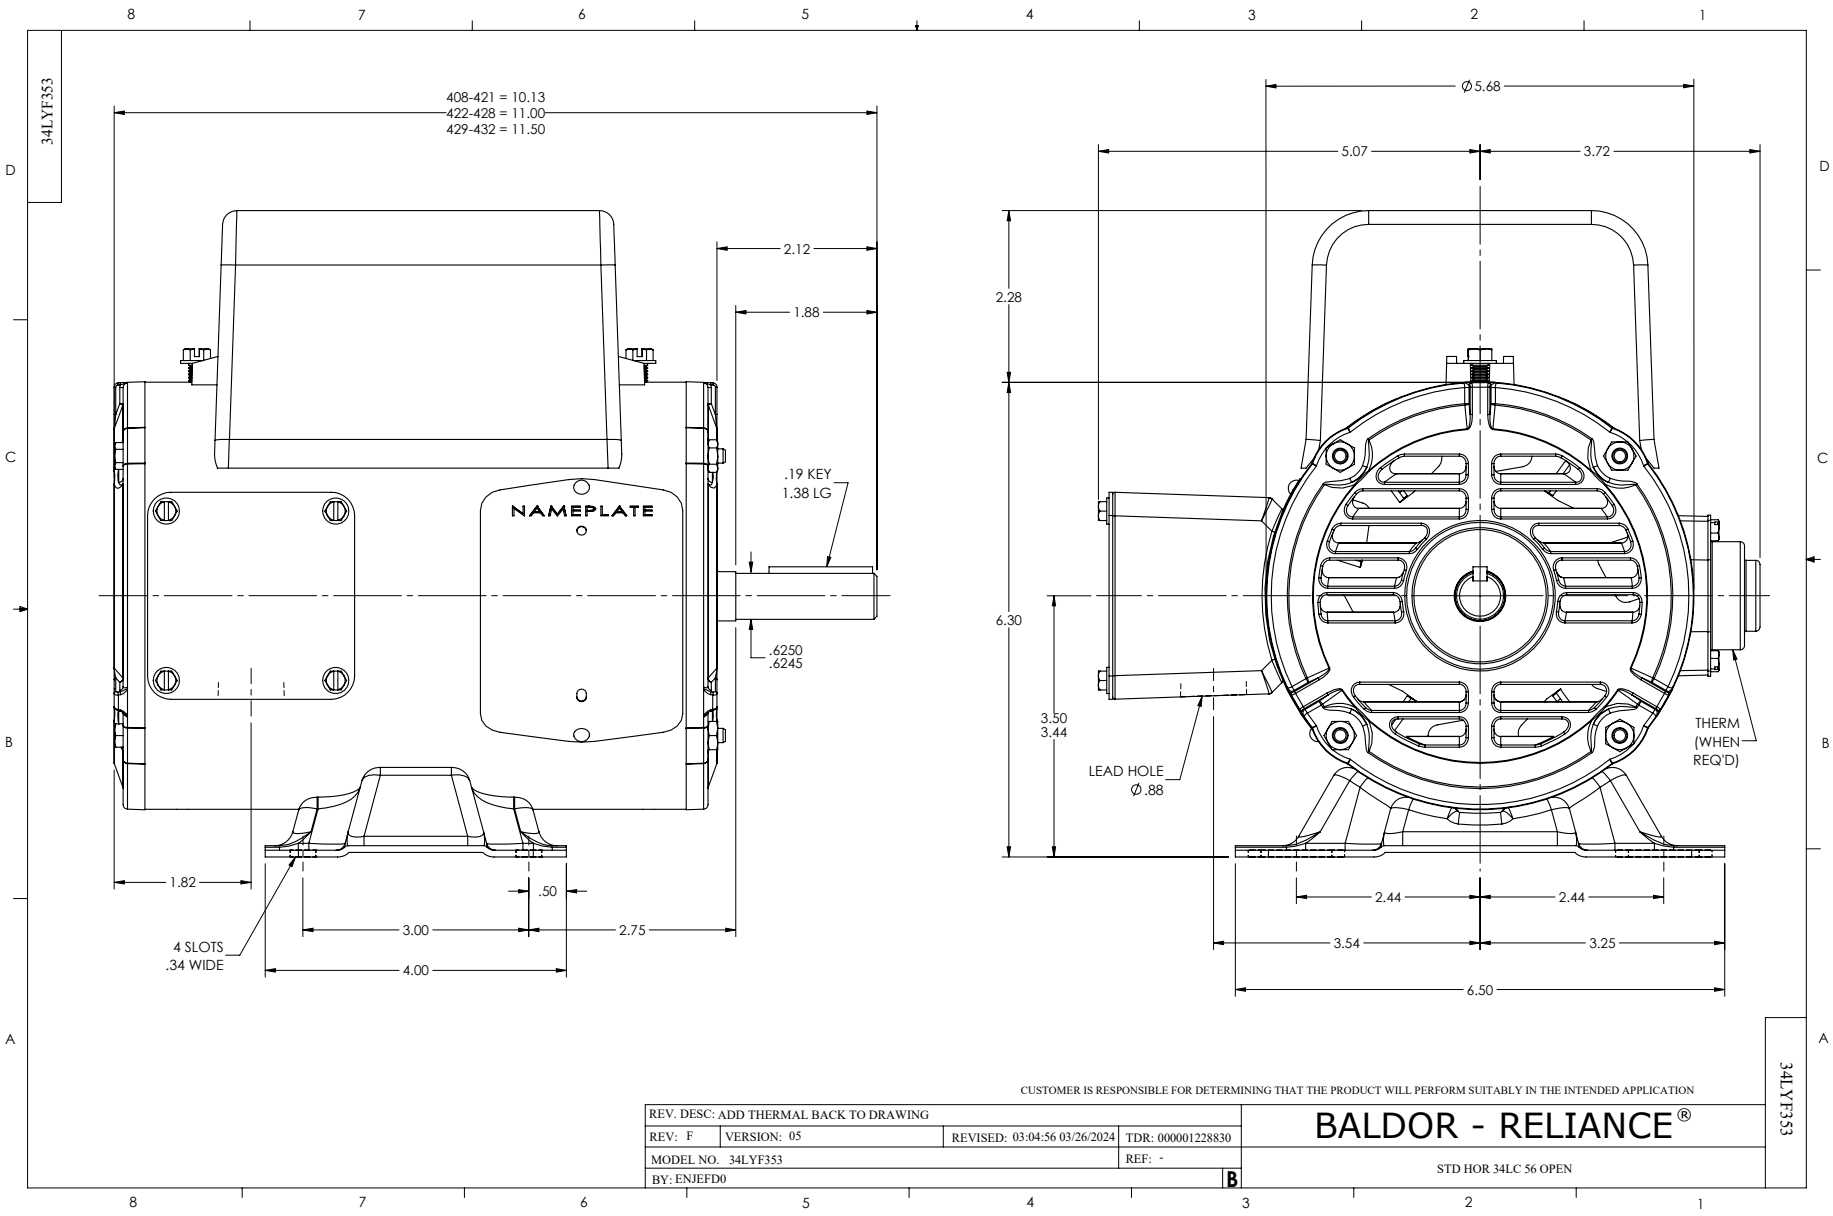
34LYF353
408-421 = 10.13
422-428 = 11.00
429-432 = 11.50
2.12
1.88
.19 KEY
1.38 LG
NAMEPLATE
.6250
.6245
1.82
.50
3.00
2.75
4.00
4 SLOTS
.34 WIDE
Ø5.68
5.07
3.72
2.28
6.30
3.50
3.44
LEAD HOLE
Ø .88
THERM
(WHEN
REQ'D)
2.44
2.44
3.54
3.25
6.50
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: ADD THERMAL BACK TO DRAWING
REV: F
VERSION: 05
REVISED: 03:04:56 03/26/2024
TDR: 000001228830
MODEL NO. 34LYF353
REF: -
BY: ENJEFD0
B
BALDOR - RELIANCE®
STD HOR 34LC 56 OPEN
34LYF353

CD0055

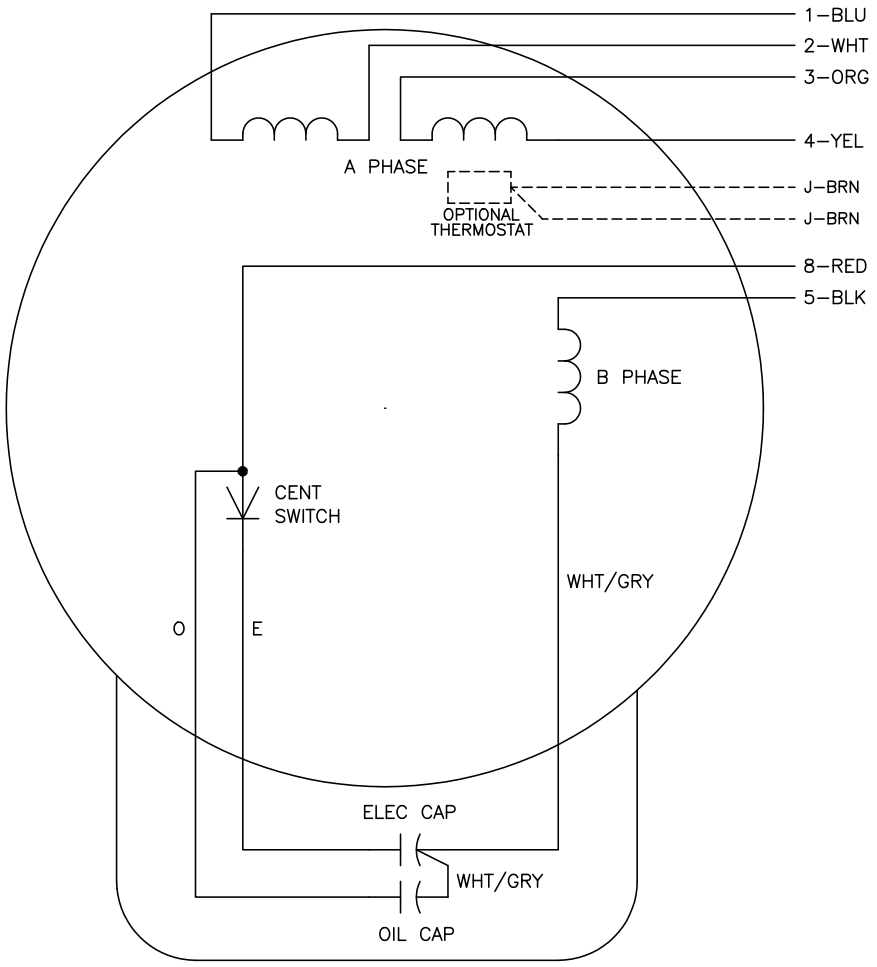

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	–
LOW OPP	1,3,5	2,4,8	–

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0055

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:17	TDR: 0178636
CD0055		FILE: AAA00007414	MDL: –
		MTL: –	TYPE LC, DV, REV, 6 LEADS