

ABB BALDOR RELIANCE III

Customer information packet

EM2538T

40HP, 3540RPM, 3PH, 60HZ, 286TS, 4046M, OPSB, F

Specifications

Enclosure	OPSB
Frame	286TS
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM NEMA PREMIUM (OLD LOGO)
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	46.000 A @ 460.0 V 92.000 A @ 230.0 V 100.000 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	46.0 a

Part Detail

Revision	V
Type	AC
Mech. spec.	40G51
Base	
Status	PRD/A
Elec. spec.	40WGX194
Layout	40LYG051
Eff. date	06-27-2024
CD Diagram	CD0180
Poles	02
Leads	9#8
Proprietary	False
Created date	10-15-2010

Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4046M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	22.44 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3530 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3554LUA											
CAT.NO.	EM2538T			P/N						ENCL	OPSB
SPEC.	40G051X194	CC	010A	FRAME		286TS	SER.NO.				
HP	40		CLASS		F	HZ	60				
RPM	3530		PH	3	DES		B				
VOLTS	230/460			CODE		G	ODE BRG		6309	DE BRG	6311
AMPS	92/46										
RATING	40C AMB-CONT		NEMA-NOM-EFF			92.4	GREASE		POLYREX EM		
PF	89	SER.F.	1.15		CT30-60(2:1) VT3-60(20:1)						
USABLE AT	50HZ 40HP 190/380V 112/56A				SF 1.0						
HTR-VOLTS	HTR-AMPS	MAX. SPACE HEATER TEMP.									

Accessories

Part number	Description	Multiplier
40-1400	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 32915

Typical performance - not guaranteed values

Winding: 40WGX194-R001			Type: 4046M		Enclosure: OPSB		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		40	Full Load Torque		60.3 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		92/46	Breakdown Torque		207 LB-FT		
R.P.M.		3530	Pull-up Torque		74.8 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		103 LB-FT	
NEMA Design Code		B	KVA Code	G	Starting Current		282 A
Service Factor (S.F.)		1.15	No-load Current		11.7 A		
NEMA Nom. Eff.		92.4	Power Factor	89	Line-line Res. @ 25°C		0.194 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		35°C
S.F. Amps					Temp. Rise @ S.F. Load		44°C
					Locked-rotor Power Factor		23.9
					Rotor inertia		1.97 LB-FT2

Load Characteristics 460 V, 60 Hz, 40 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	66	82	88	89	90	90	90
Efficiency	91.4	93.6	93.6	92.9	91.9	90.6	92.4
Speed	3581	3565	3547	3527	3505	3481	3514
Line amperes	16.4	24.9	34.7	45.9	57	69.7	52.6


ABB Motors and Mechanical Inc.

WINDING # 40WGX194

Typical performance - not guaranteed values.


40 HP 3 PH 60 HZ 3530 RPM 460 V 4046M

TORQUES (LB-FT): PO=207 PU=74.8 LR=103 LRA=282

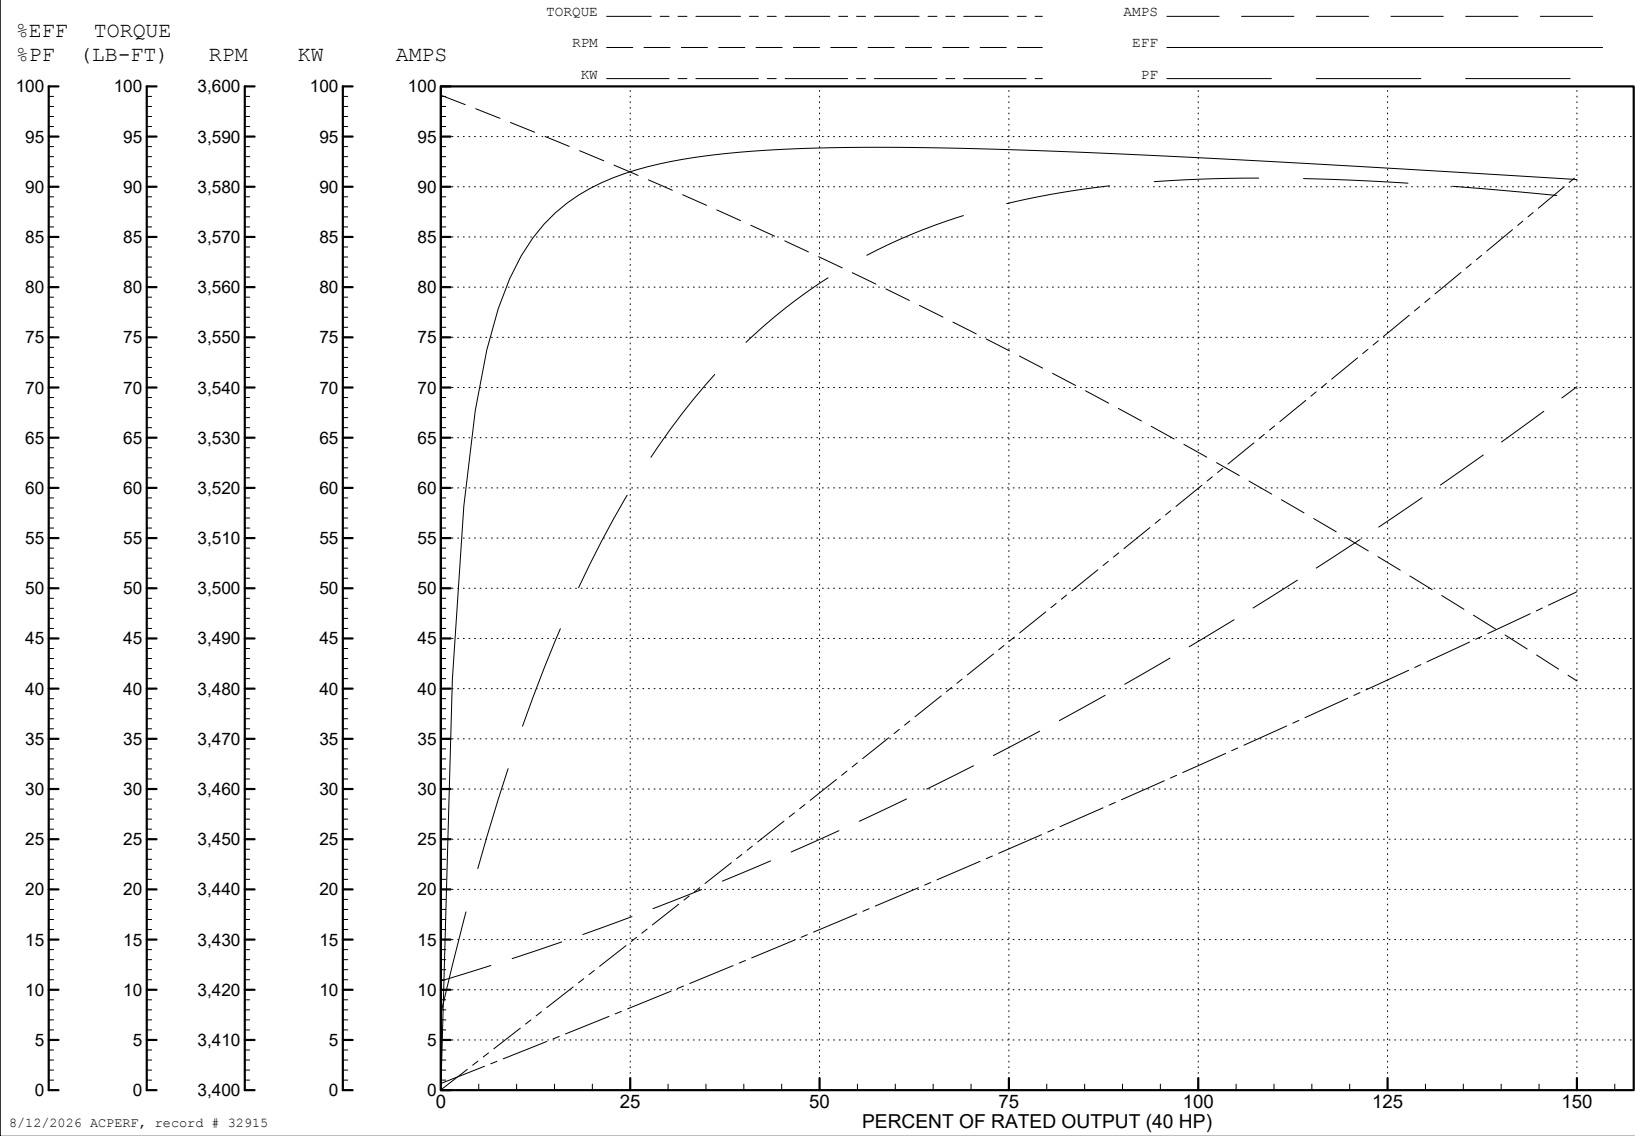





CD0180

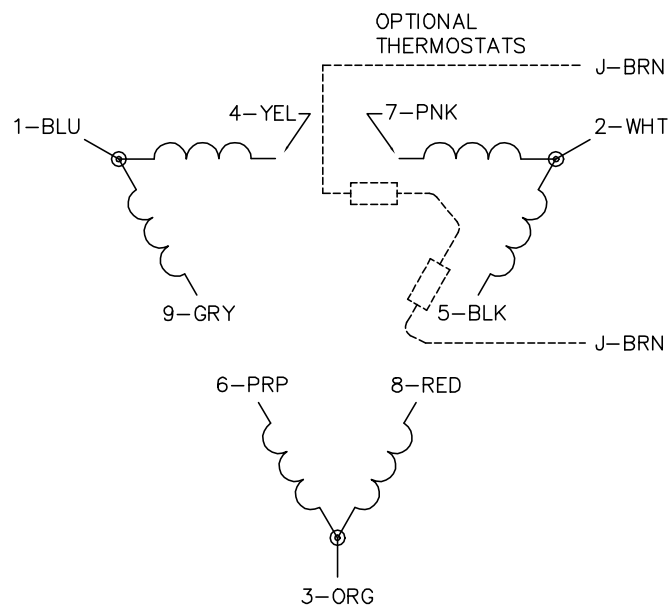

LOW VOLTAGE
(2D)



HIGH VOLTAGE
(1D)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1