



Customer information packet

EM31116-5

1HP, 1774RPM, 3PH, 60HZ, 56, 3522M, OPEN, F1, N

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
XP Class and Group	None
XP Division	Not Applicable
Agency Approvals	CURUSEEV
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.300 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.3 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	N
Lifting Lugs	No Lifting Lugs

Part detail

Revision	B
Type	AC
Mech. spec.	35B011
Base	
Status	PRD/A
Elec. spec.	35WGG119
Layout	35LYB011
Eff. date	03-24-2023
CD Diagram	CD0006
Poles	04
Leads	3#18
Proprietary	False
Created date	01-10-2022

Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3522M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.07 IN
Power Factor	67
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1774 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3155L										
CAT.NO.	EM31116-5									
SPEC.	35B011G119G1									
HP	1									
VOLTS	575									
AMP	1.3									
RPM	1775									
FRAME	56		HZ	60		PH	3			
SER.F.	1.15	CODE	M	DES	B	CL	F			
F.L. AVG. EFF.	85.5	PF	70							
RATING	40C AMB-CONT									
CC		USABLE AT 208V								
DE	6205		ODE	6203						
ENCL	OPEN	SN								
	SFA 1.34									

AC Induction Motor Performance Data

Record # 82126

Typical performance - not guaranteed values

Winding: 35WGG119-R004		Type: 3522M		Enclosure: OPEN	
Nameplate Data			575 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)	1	Full Load Torque	2.95 LB-FT		
Volts	575	Start Configuration	direct on line		
Full Load Amps	1.2	Breakdown Torque	12.3 LB-FT		
R.P.M.	1770	Pull-up Torque	7.7 LB-FT		
Hz	60	Locked-rotor Torque	10 LB-FT		
NEMA Design Code	B	Starting Current	11.1 A		
Service Factor (S.F.)	1.15	No-load Current	0.8 A		
NEMA Nom. Eff.	85.5	Line-line Res. @ 25°C	30.8 Ω		
Rating - Duty	40C	Temp. Rise @ Rated Load	31°C		
S.F. Amps	1.3	Temp. Rise @ S.F. Load	36°C		
		Locked-rotor Power Factor	62.7		
		Rotor inertia	0.159 lb-ft ²		

Load Characteristics 575 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	32	50	63	71	77	81	75
Efficiency	71.9	81.5	84.7	85.4	85	84.3	85.3
Speed	1792	1785	1777	1769	1760	1751	1767
Line amperes	0.83	0.92	1.06	1.22	1.42	1.64	1.34


ABB Motors and Mechanical Inc.

WINDING # 35WGG119


1 HP 3 PH 60 HZ 1770 RPM 575 V 3522M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=12.3 PU=7.7 LR=10 LRA=11.1

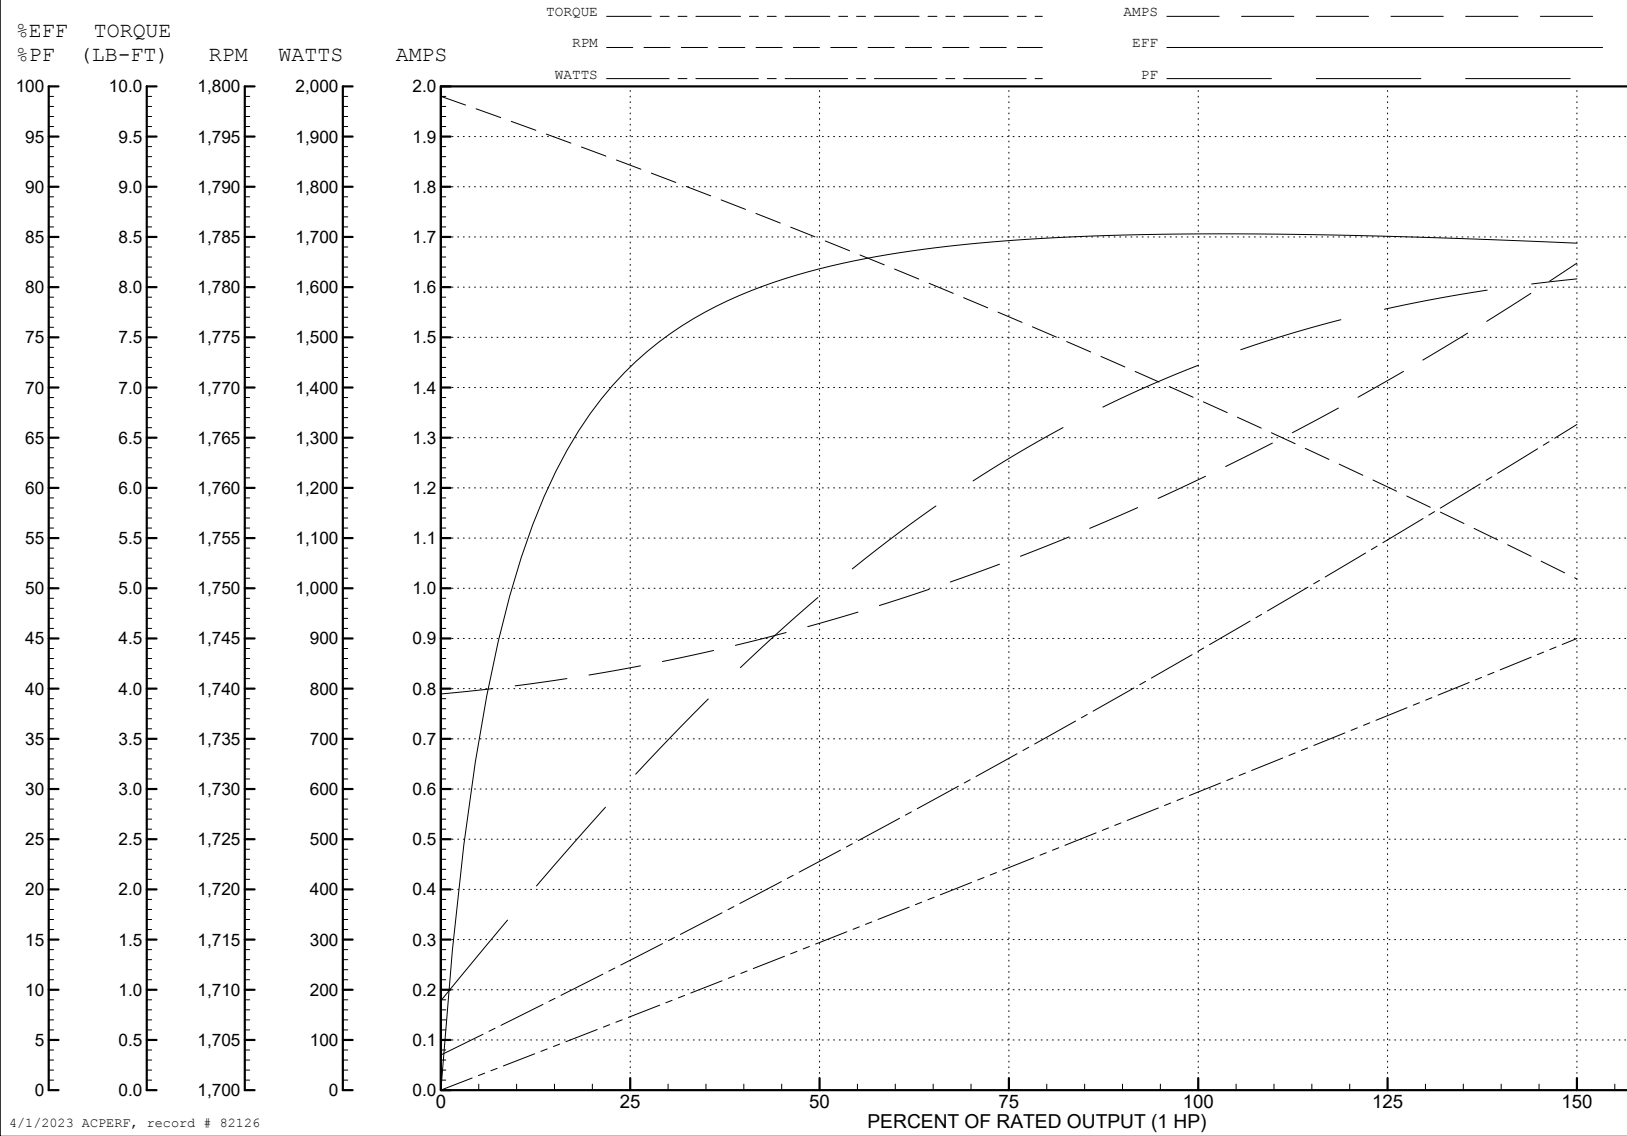

4/1/2023 ACPERF, record # 82126

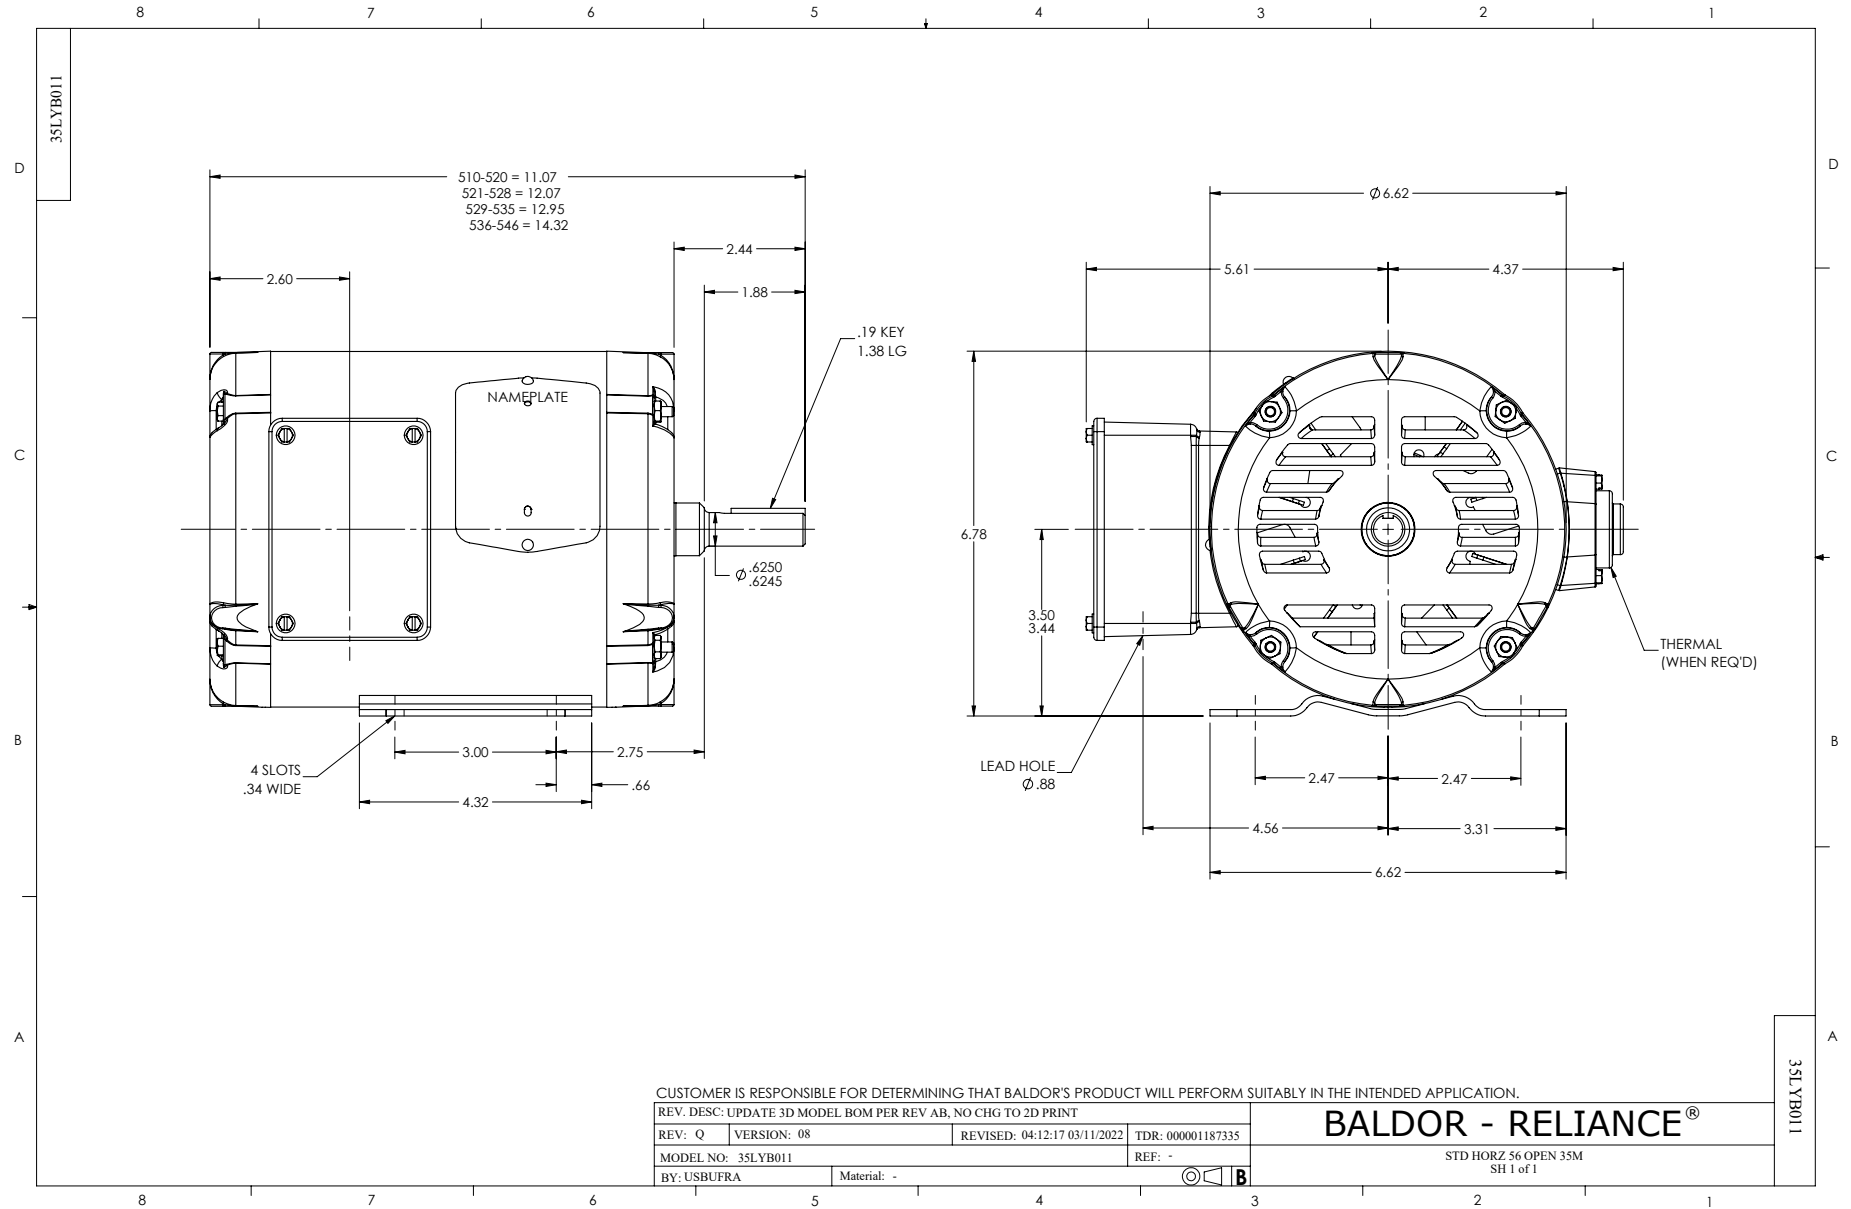

CD0006



NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -	© □	

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1