ABB BALDOR RELIANCE

Customer information packet

EM3211T-57

3HP, 1450RPM, 3PH, 50HZ, 182T, 3630M, OPEN, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/13/2026 7:33:32 PM

Specifications

Enclosure	OPEN
Frame	182T
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	230.0 V @ 50 HZ
	400.0 V @ 50 HZ
Agency Approvals	CE
	CURUS
	IE3
	UKCA
	WEEE
	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	8.400 A @ 230.0 V
	4.850 A @ 400.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part Detail

Revision	F
Type	AC
Mech. spec.	36B001
Base	
Status	PRD/A
Elec. spec.	36WGR999
Layout	36LYB001
Eff. date	10-30-2025
CD Diagram	CD0022
Poles	04
Leads	6#16
Proprietary	False
Created date	12-22-2015

Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.9 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3630M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.00 IN
Power Factor	76
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1450 rpm
Speed Code	Single Speed
Starting Method	Direct on line

Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2716L											
CAT NO	EM3211T-57										
SPEC.	36B001R999G1										
HP	3/2.2KW						**PH**	3			
VOLTS	230/400										
AMP	8.4/4.85										
R.P.M. (1/MIN)	1450										
FRAME	182T		**HZ**	50				**I.P.**	23		
SER.F.	1.15	**CODE**	J	**DES**	B			**CL**	F		
NOM.EFF.	86.7			**% (100%)**							
PF	76										
RATING	40C AMB-S1 CONT					**CC**					
DE BRG	6206			**ODE**	6205						
ENCL	OPEN	**SN**									
BLANK	IE3-88.1(75%)86.8(50%)										
	IC01 34KG										

AC Induction Motor Performance Data
Record # 54654
Typical performance - not guaranteed values

Winding: 36WGR999-R001	**Type:** 3630M	**Enclosure:** OPEN

Nameplate Data				**400 V, 50 Hz: High Voltage Connection**	
Rated Output (HP)			3	**Full Load Torque**	10.8 LB-FT
Volts			230/400	**Start Configuration**	direct on line
Full Load Amps			8.4/4.85	**Breakdown Torque**	41 LB-FT
R.P.M.			1450	**Pull-up Torque**	19.5 LB-FT
Hz	50	**Phase**	3	**Locked-rotor Torque**	24.4 LB-FT
NEMA Design Code	B	**KVA Code**	J	**Starting Current**	33.3 A
Service Factor (S.F.)			1.15	**No-load Current**	2.58 A
NEMA Nom. Eff.	86.7	**Power Factor**	76	**Line-line Res. @ 25ºC**	3.77 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	51°C
S.F. Amps				**Temp. Rise @ S.F. Load**	62°C
				Locked-rotor Power Factor	48.4
				Rotor inertia	0.279 LB-FT2

Load Characteristics 400 V, 50 Hz, 3 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	35	56	69	76	81	82	79
Efficiency	80.5	86.8	88.1	87.8	86.4	84.8	87
Speed	1489	1479	1467	1456	1442	1425	1448
Line amperes	2.79	3.29	3.97	4.85	5.78	6.95	5.41


ABB Motors and Mechanical Inc.


WINDING # 36WGR999

3 HP 3 PH 50 HZ 1450 RPM 400 V 3630M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=41 PU=19.5 LR=24.4 LRA=33.3

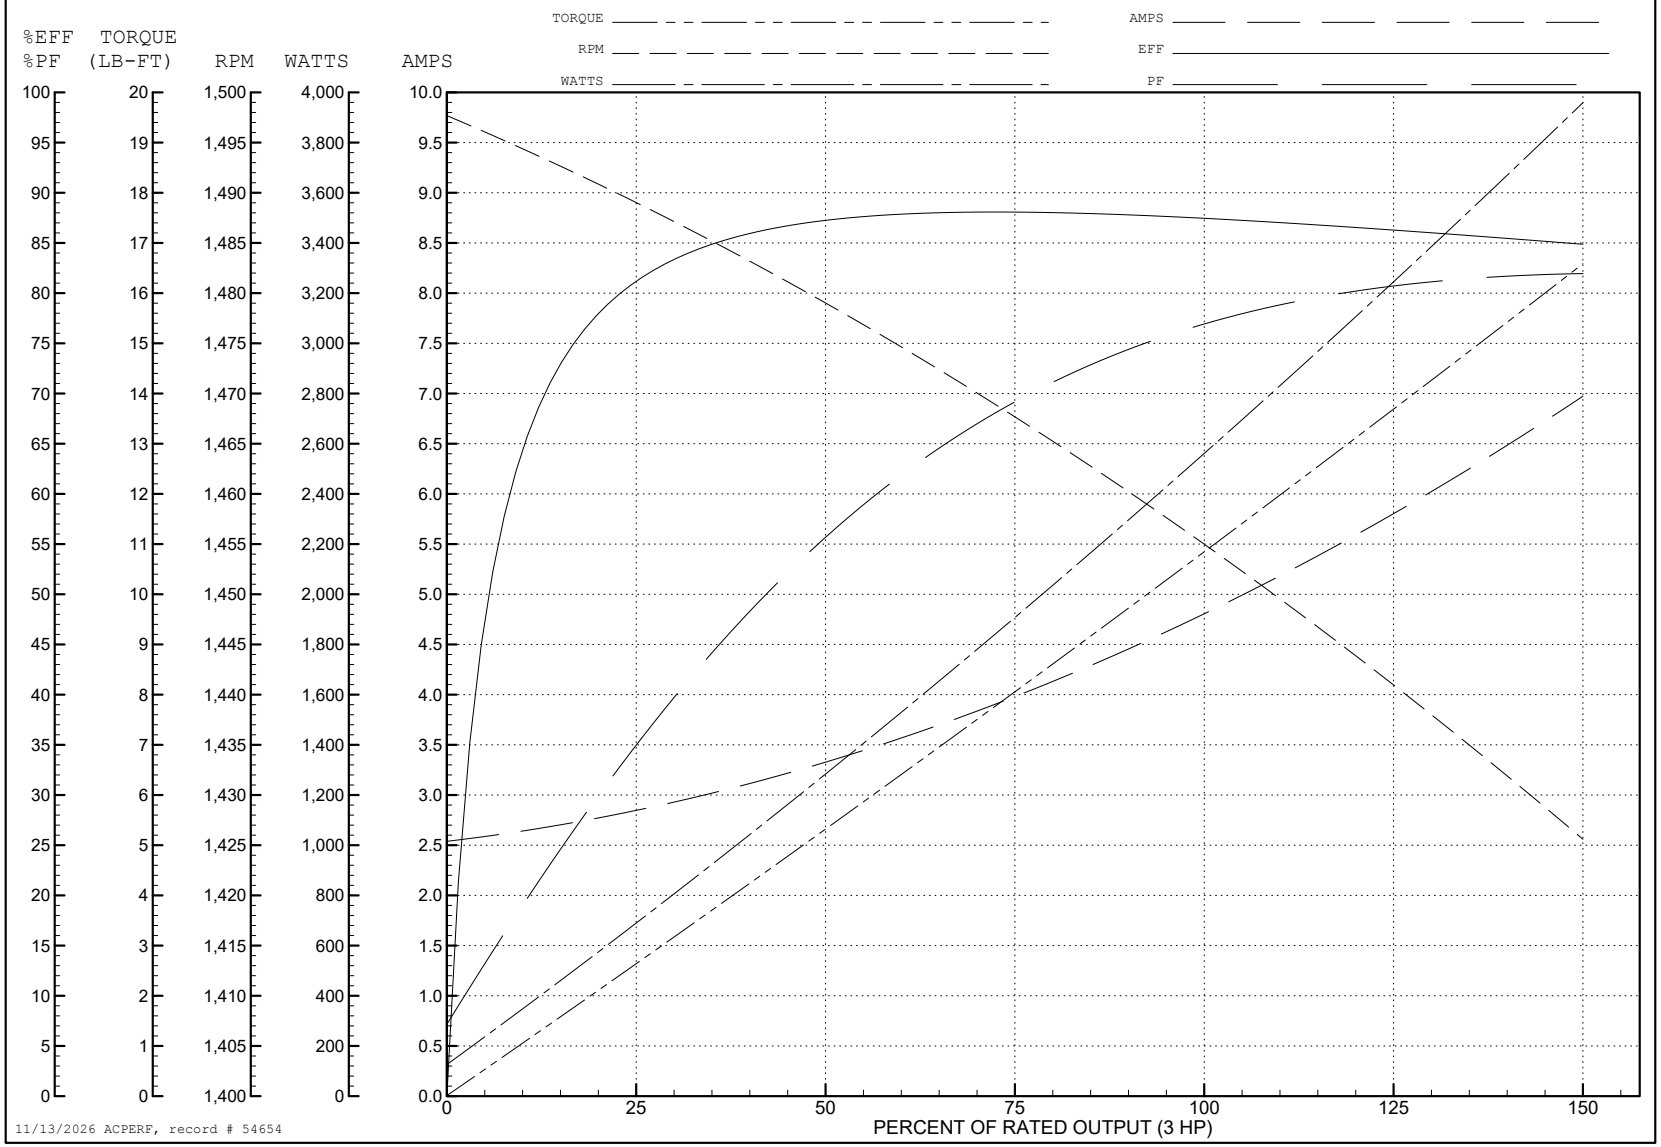


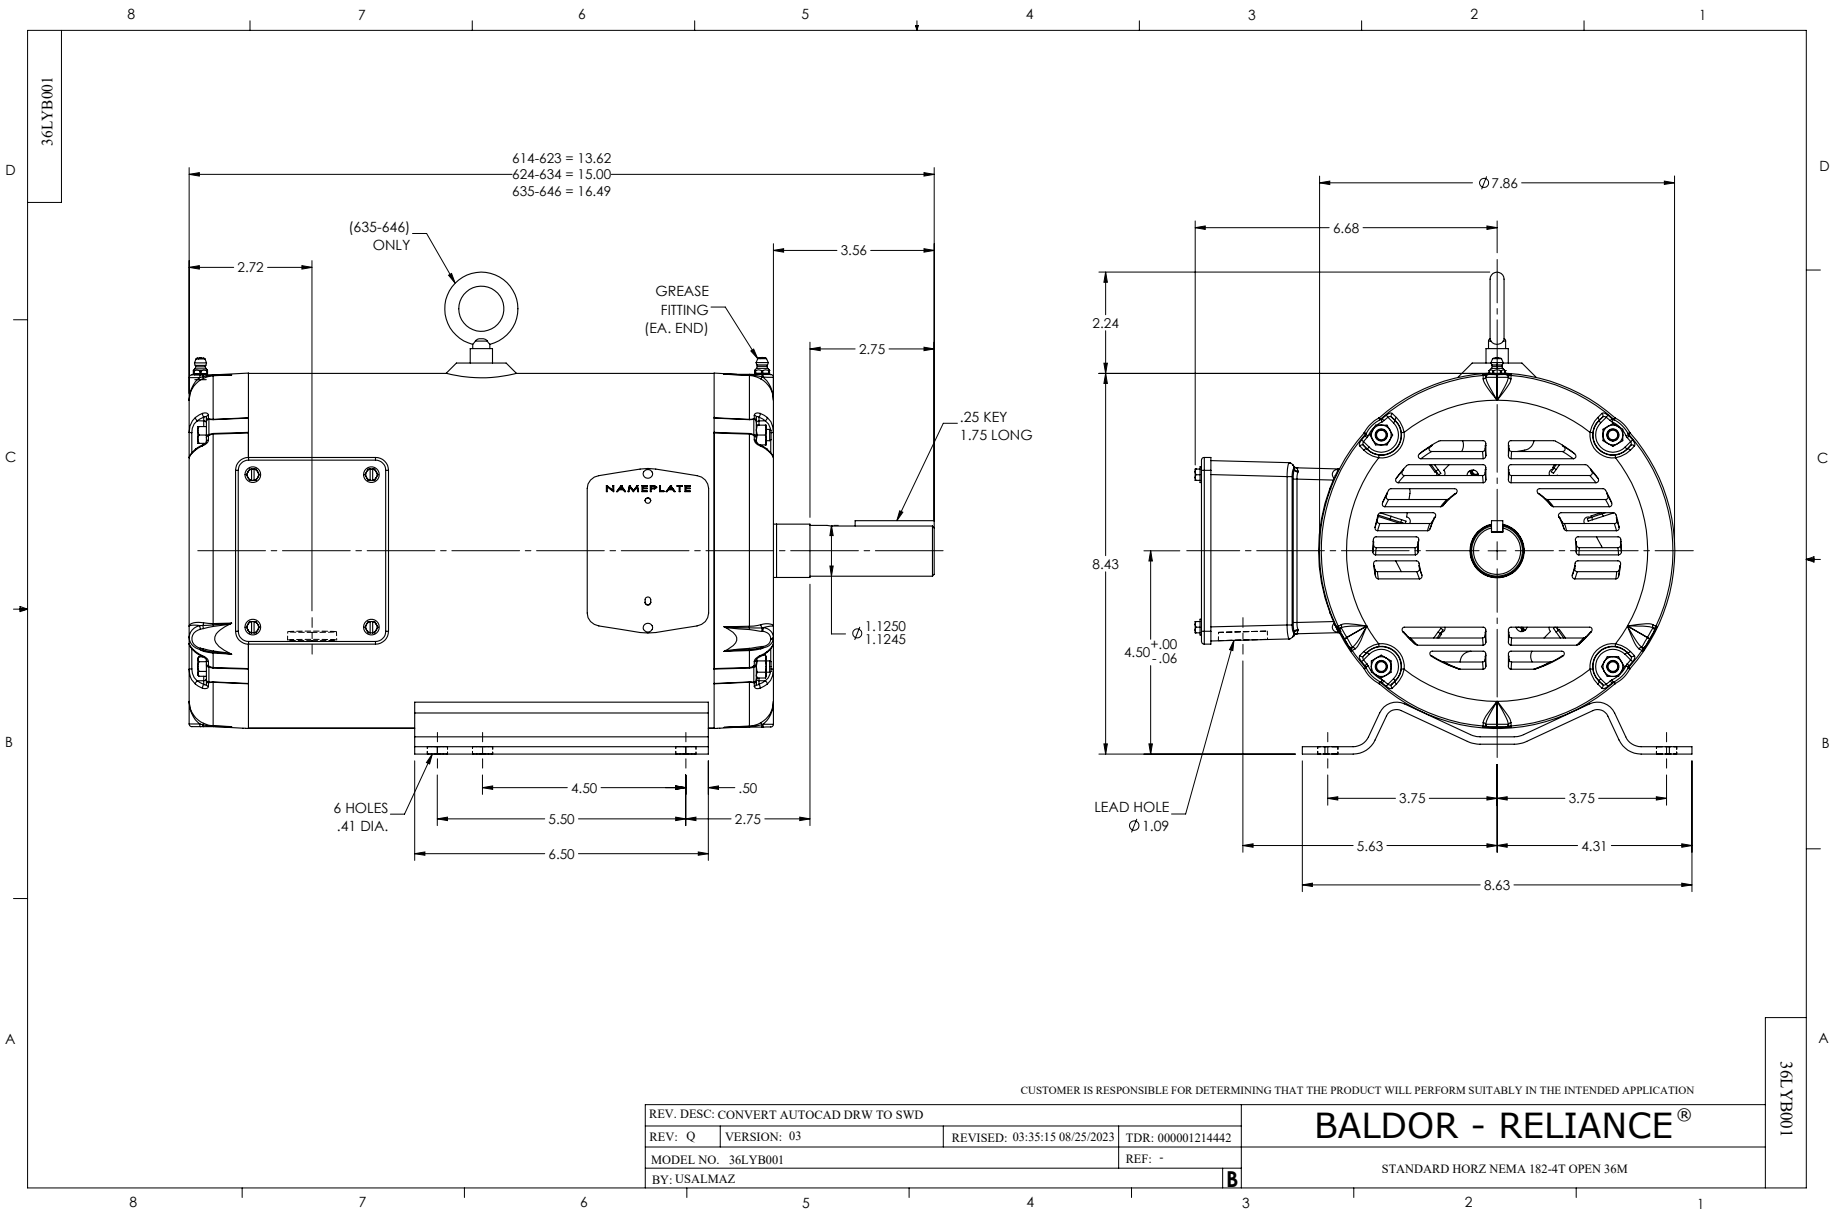
36LYB001
614-623 = 13.62
624-634 = 15.00
635-646 = 16.49
(635-646) ONLY
2.72
3.56
GREASE FITTING (EA. END)
2.75
.25 KEY 1.75 LONG
NAMEPLATE
Ø 1.1250 1.1245
6 HOLES .41 DIA.
4.50
.50
5.50
2.75
6.50
Ø7.86
6.68
2.24
8.43
4.50 +.00 -.06
LEAD HOLE Ø 1.09
3.75
3.75
5.63
4.31
8.63
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT AUTOCAD DRW TO SWD
REV: Q
VERSION: 03
REVISED: 03:35:15 08/25/2023
TDR: 000001214442
MODEL NO. 36LYB001
REF: -
BY: USALMAZ
B
BALDOR - RELIANCE®
STANDARD HORZ NEMA 182-4T OPEN 36M
36LYB001

CD0022

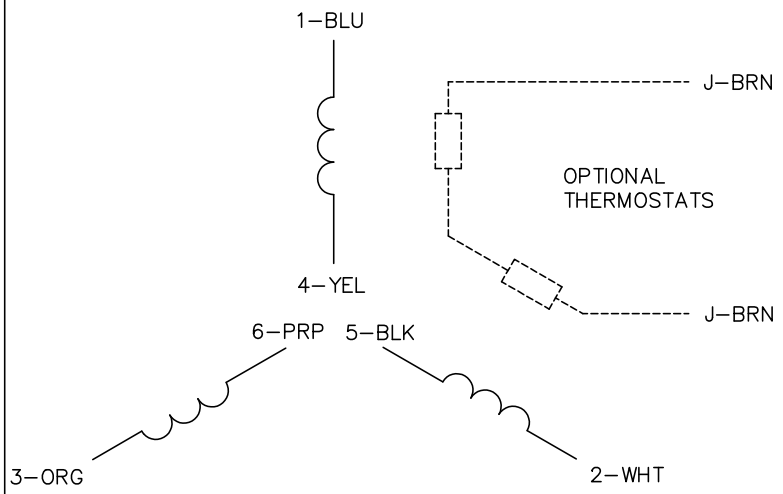





NOTES:
1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: F	BY: JLP	REVISED: 01/21/99 3:54	TDR: 0171435
CD0022		FILE: AAA00005144	MDL: –
		MTL: –	3PH, DV, 6 LEADS, DELTA/WYE CONNECTION

CD0022