

ABB BALDOR RELIANCE III

Customer information packet

EM3613T-BG

5HP, 3450RPM, 3PH, 60HZ, 184T, 3630M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UR CSA CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.900 A @ 460.0 V 11.800 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	L
Type	AC
Mech. spec.	36Q126
Base	
Status	PRD/A
Elec. spec.	36WGS042
Layout	36LYQ126
Eff. date	03-18-2026
CD Diagram	CD0005
Poles	02
Leads	9#16
Proprietary	False
Created date	10-04-2013

High Voltage Full Load Amps	5.9 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3630M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	16.54 IN
Power Factor	91
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA									
CAT.NO.	EM3613T-BG								
SPEC	36Q126S042G1								
HP	5								
VOLTS	230/460								
AMPS	11.8/5.9								
RPM	3450								
FRAME	184T		HZ	60			PH	3	
SF	1.15		CODE	L	DES	A	CLASS	H	
NEMA NOM. EFF	88.5		PF	91					
RATING	40C AMB-CONT								
CC	010A								
ENCL	TEFC		SER						
DE	6206		ODE	6205					
VPWM INVERTER READY									
CT6-60H(10:1)VT3-60H(20:1									
	50Hz 5HP 190/380V 14.2/7.1A							SF1.0	

AC Induction Motor Performance Data

Record # 46787

Typical performance - not guaranteed values

Winding: 36WGS042-R032			Type: 3630M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		5	Full Load Torque		7.67 LB-FT	
Volts		230/460	Start Configuration		direct on line	
Full Load Amps		11.8/5.9	Breakdown Torque		33.7 LB-FT	
R.P.M.		3450	Pull-up Torque		23.5 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	27.5 LB-FT	
NEMA Design Code	A	KVA Code	L	Starting Current	57.2 A	
Service Factor (S.F.)		1.15	No-load Current		1.68 A	
NEMA Nom. Eff.	88.5	Power Factor	91	Line-line Res. @ 25°C	2.26 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		72°C	
S.F. Amps			Temp. Rise @ S.F. Load		88°C	
			Locked-rotor Power Factor		45	
			Rotor inertia		0.134 LB-FT2	

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	62	81	88	91	93	94	92
Efficiency	84.1	88.9	89.4	88.7	87.3	85.8	87.9
Speed	3569	3537	3504	3466	3428	3385	3443
Line amperes	2.24	3.26	4.47	5.85	7.26	8.8	6.7


ABB Motors and Mechanical Inc.

WINDING # 36WGS042



Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 3450 RPM 460 V 3630M

TORQUES (LB-FT) : PO=33.7 PU=23.5 LR=27.5 LRA=57.2

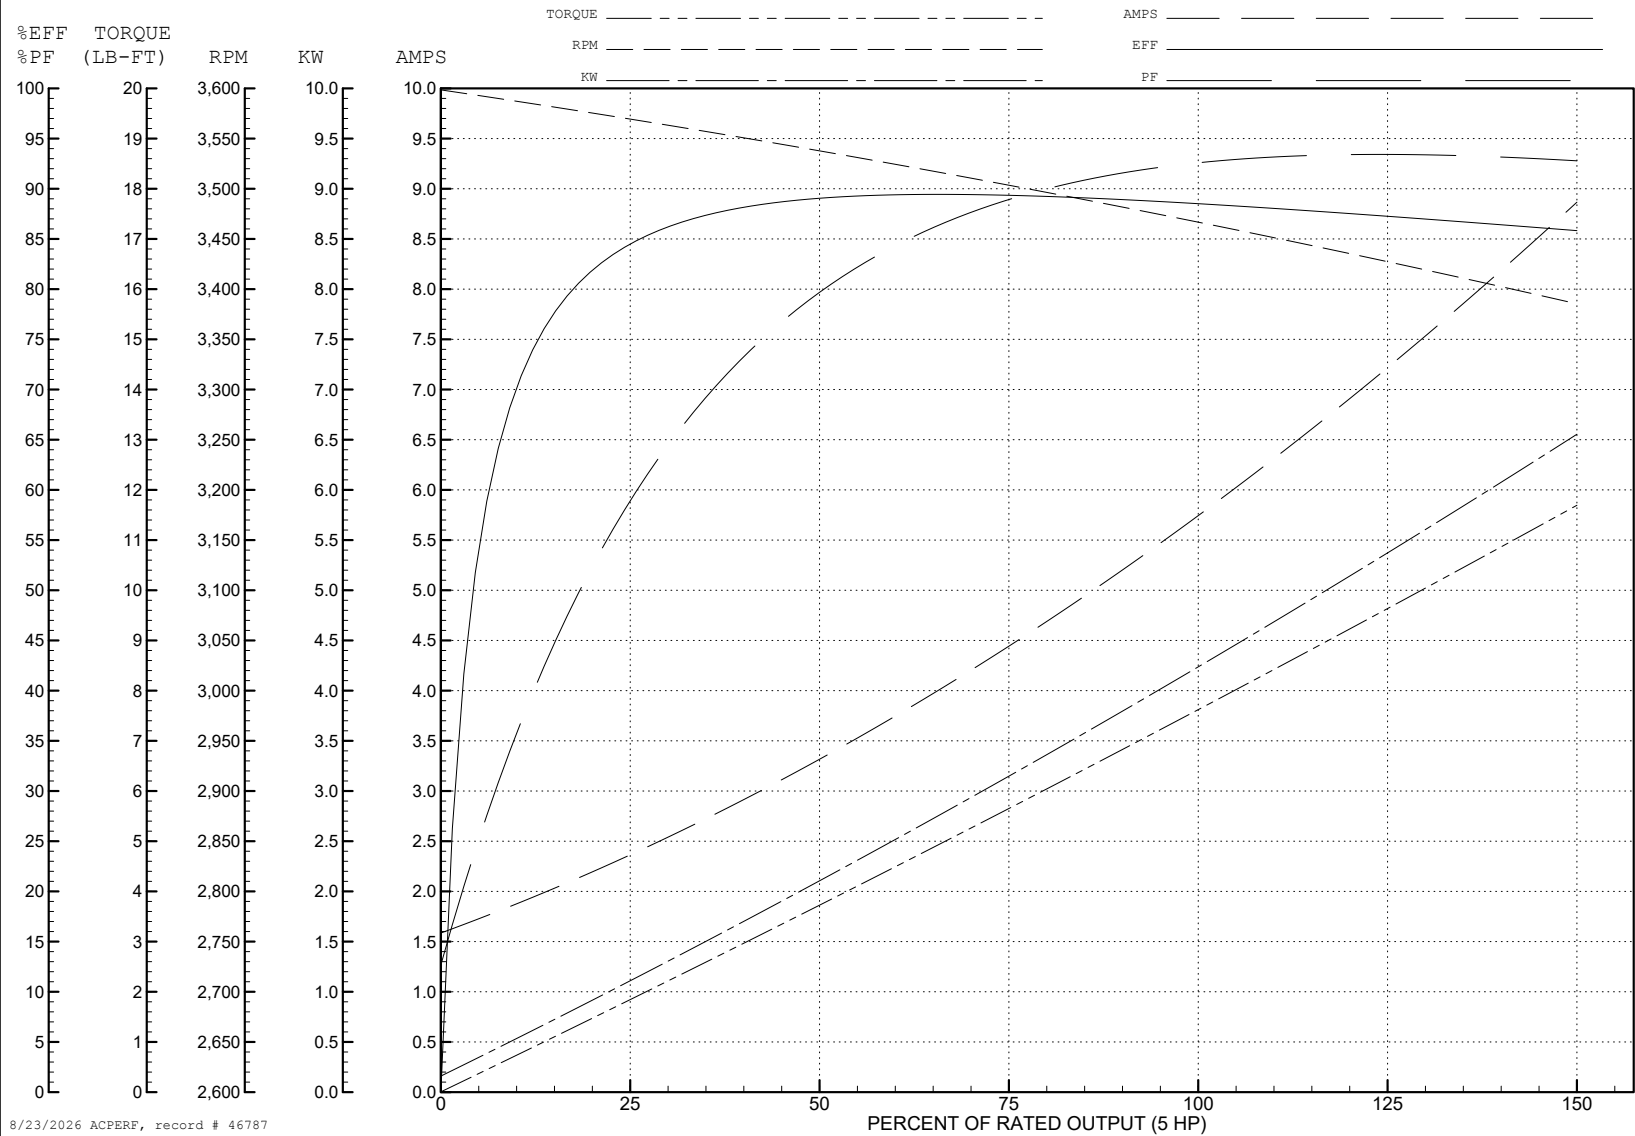

CD0005

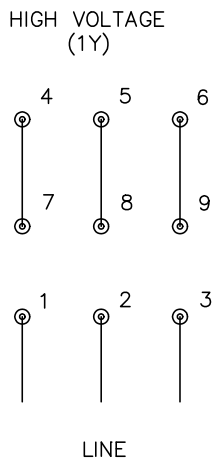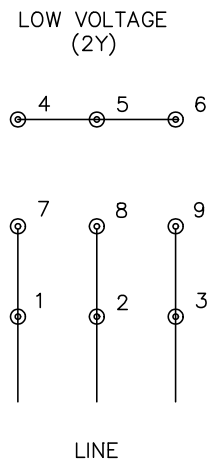

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005