ABB BALDOR RELIANCE

Customer information packet

EM3665T-BG

5HP, 1750RPM, 3PH, 60HZ, 184T, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/13/2026 6:54:27 PM

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.600 A @ 460.0 V
	14.000 A @ 208.0 V
	13.200 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	6.6 a

Part Detail

Revision	C
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	06WGX182
Layout	06LYK800
Eff. date	04-29-2024
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	04-10-2019

Insulation Class	H
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0642M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.24 IN
Power Factor	79
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA										
CAT.NO.	EM3665T-BG									
SPEC	06-0000-0085									
HP	5									
VOLTS	230/460									
AMPS	13.2/6.6									
RPM	1750									
FRAME	184T	**HZ**	60	**PH**	3					
SF	1.15	**CODE**	J	**DES**	B	**CLASS**	H			
NEMA NOM. EFF	89.5	**PF**	79							
RATING	40C AMB-CONT									
CC	010A									
ENCL	TEFC	**SER**								
DE	6206	**ODE**	6205							
VPWM INVERTER READY										
CT6-60H(10:1)VT3-60H(20:1										
	50HZ 5HP 190/380V 15.8/7.9A									SF1.0

AC Induction Motor Performance Data
Record # 75464
Typical performance - not guaranteed values

Winding: 06WGX182-R019	**Type:** 0642M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			5	**Full Load Torque**	15 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			13.2/6.6	**Breakdown Torque**	53.9 LB-FT
R.P.M.			1750	**Pull-up Torque**	22.4 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	31.8 LB-FT
NEMA Design Code	B	**KVA Code**	J	**Starting Current**	46.6 A
Service Factor (S.F.)			1.15	**No-load Current**	3.02 A
NEMA Nom. Eff.	89.5	**Power Factor**	79	**Line-line Res. @ 25ºC**	2.63 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	53°C
S.F. Amps				**Temp. Rise @ S.F. Load**	66°C
				Locked-rotor Power Factor	40.5
				Rotor inertia	0.391 LB-FT2

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	41	63	75	81	84	85	83
Efficiency	85.1	89.7	90.3	89.8	88.4	86.8	89
Speed	1789	1777	1765	1752	1737	1721	1743
Line amperes	3.35	4.14	5.21	6.45	7.91	9.47	7.33


ABB Motors and Mechanical Inc.


WINDING # 06WGX182

5 HP 3 PH 60 HZ 1750 RPM 460 V 0642M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=53.9 PU=22.4 LR=31.8 LRA=46.6

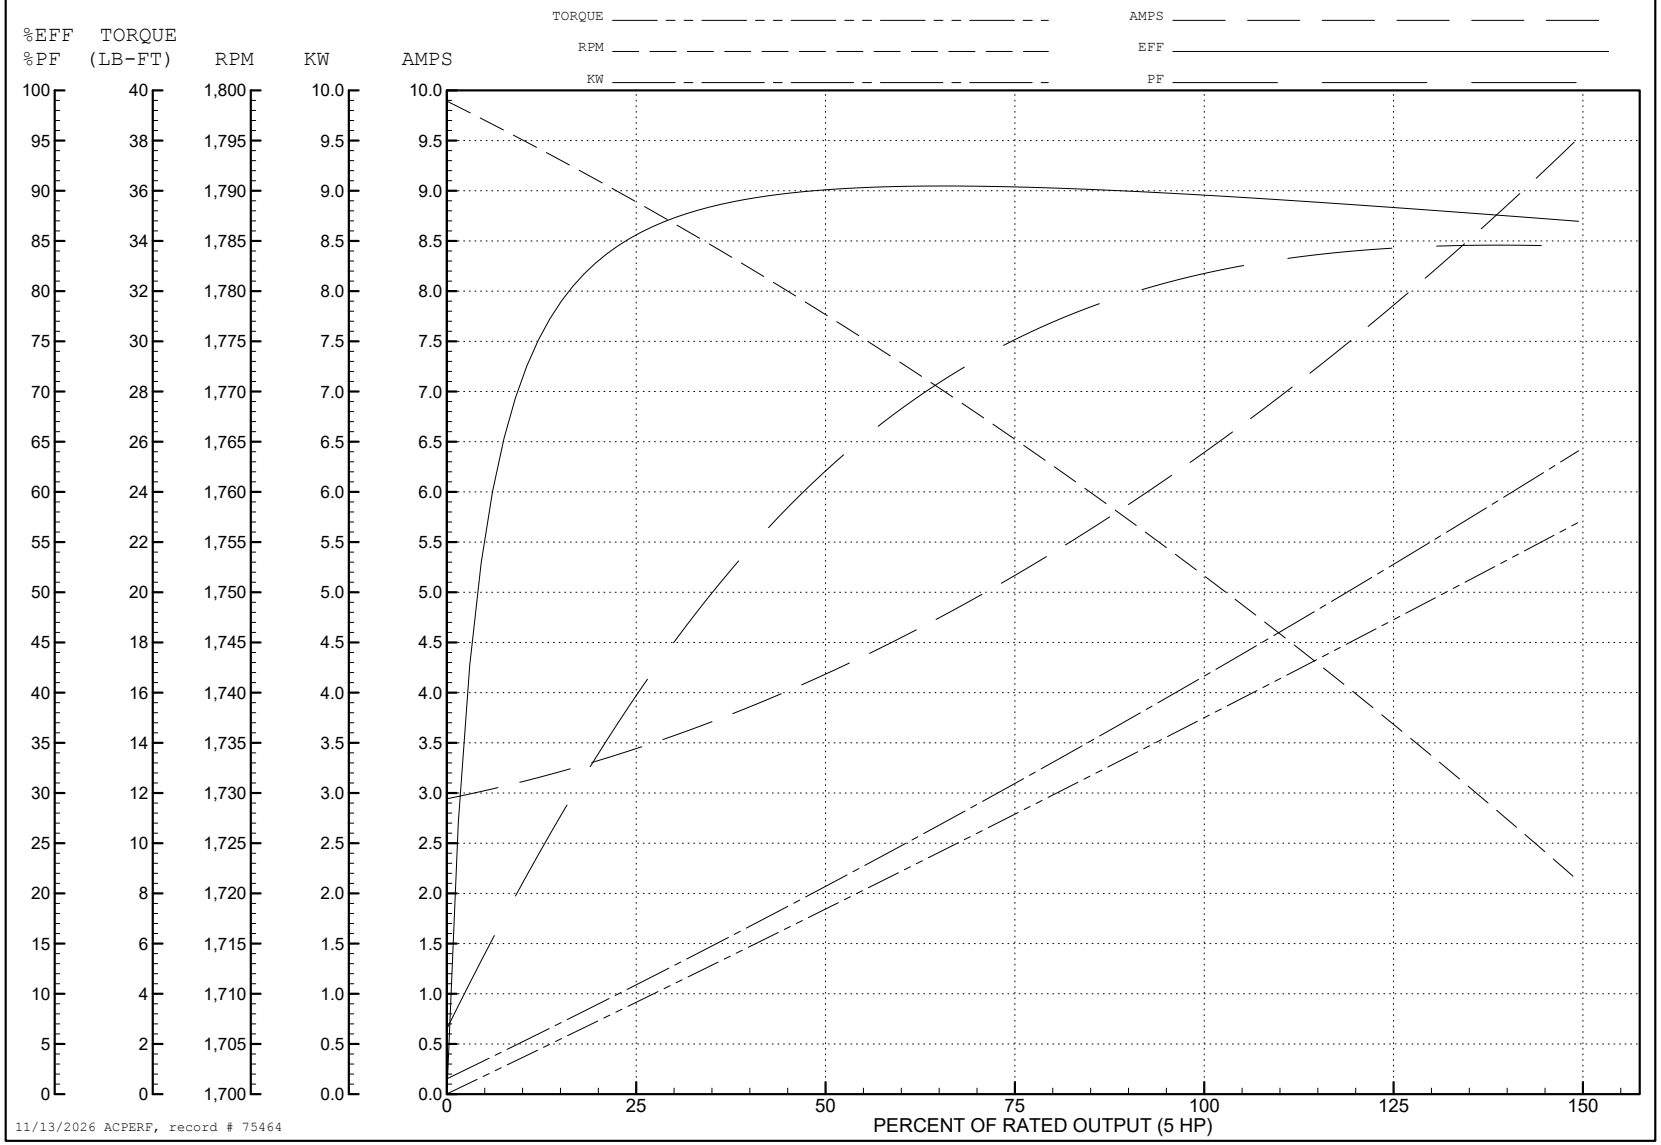

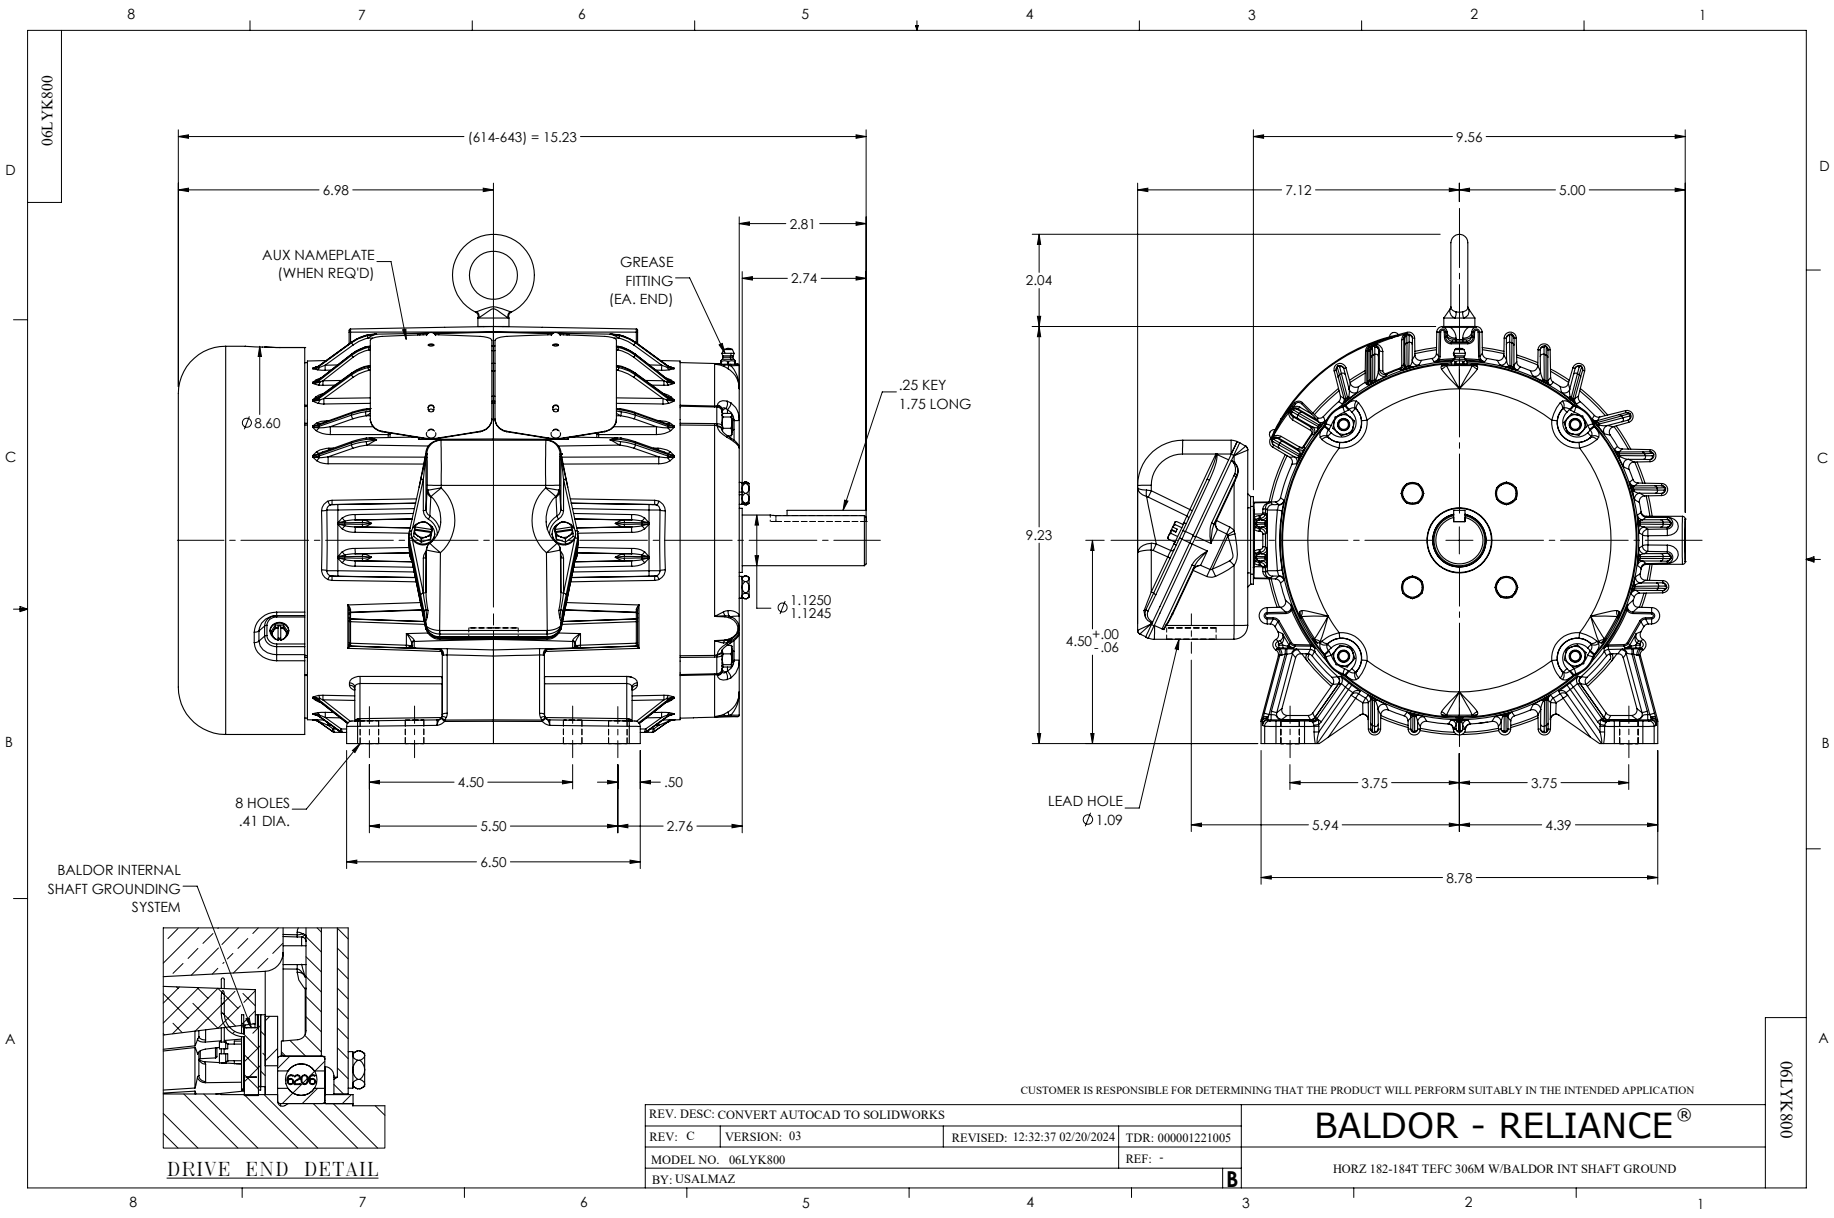
06LYK800
(614-643) = 15.23
6.98
2.81
2.74
AUX NAMEPLATE (WHEN REQ'D)
GREASE FITTING (EA. END)
.25 KEY 1.75 LONG
Ø8.60
Ø1.1250 1.1245
8 HOLES .41 DIA.
4.50
.50
5.50
2.76
6.50
9.56
7.12
5.00
2.04
9.23
4.50 +.00 -.06
LEAD HOLE Ø1.09
3.75
3.75
5.94
4.39
8.78
BALDOR INTERNAL SHAFT GROUNDING SYSTEM
6206
DRIVE END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT AUTOCAD TO SOLIDWORKS
REV: C
VERSION: 03
REVISED: 12:32:37 02/20/2024
TDR: 000001221005
MODEL NO. 06LYK800
REF: -
BY: USALMAZ
B
BALDOR - RELIANCE®
HORZ 182-184T TEFC 306M W/BALDOR INT SHAFT GROUND
06LYK800

CD0005

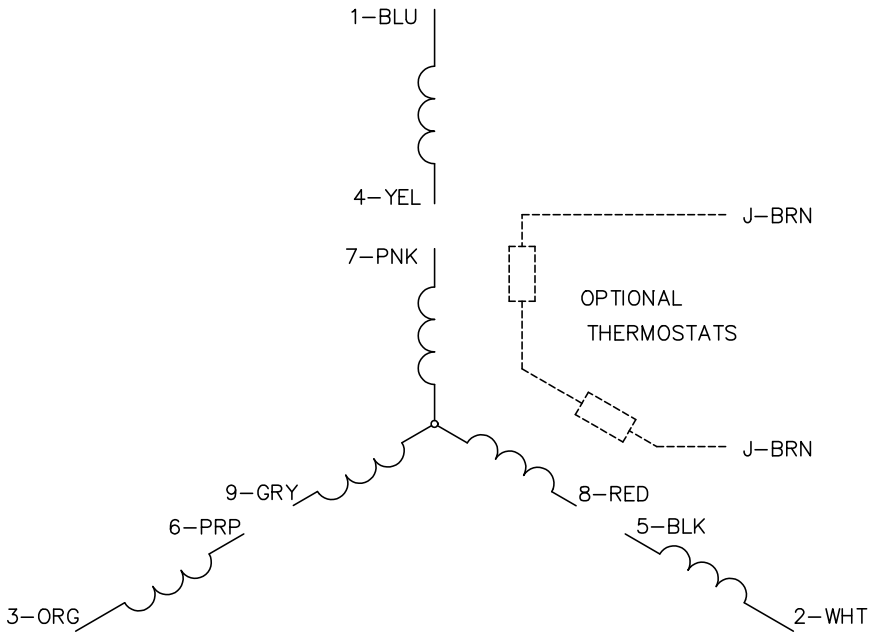

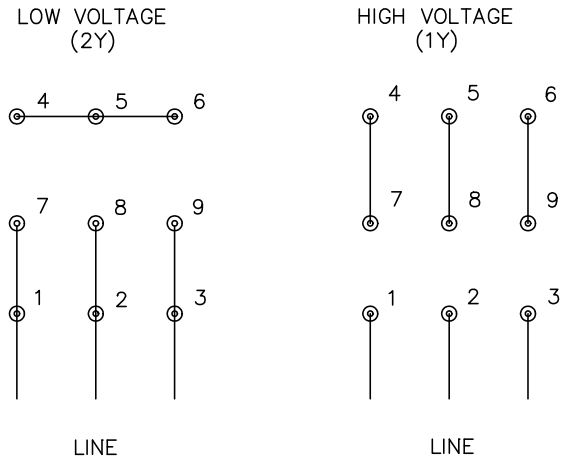

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS