

# ABB BALDOR RELIANCE III

---

## Customer information packet

### EM3769T-8

7.5HP, 3500RPM, 3PH, 60HZ, 213T, 0724M, TEFC, F

Class - None

Division - Not Applicable

**Specifications**

|                                       |                                                     |
|---------------------------------------|-----------------------------------------------------|
| <b>Enclosure</b>                      | TEFC                                                |
| <b>Frame</b>                          | 213T                                                |
| <b>Frame Material</b>                 | Iron                                                |
| <b>Frequency</b>                      | 60.00 Hz                                            |
| <b>Haz Area Class and Group</b>       | None                                                |
| <b>Haz Area Division</b>              | Not Applicable                                      |
| <b>Motor Letter Type</b>              | Three Phase                                         |
| <b>Output @ Frequency</b>             | 7.500 HP @ 60 HZ                                    |
| <b>Phase</b>                          | 3                                                   |
| <b>Synchronous Speed @ Frequency</b>  | 3600 RPM @ 60 HZ                                    |
| <b>Voltage @ Frequency</b>            | 200.0 V @ 60 HZ                                     |
| <b>Agency Approvals</b>               | NEMA PREMIUM (OLD LOGO)<br>CURUSEEV<br>NEMA PREMIUM |
| <b>Ambient Temperature</b>            | 40 °C                                               |
| <b>Auxiliary Box</b>                  | NO AUXILLARY BOX                                    |
| <b>Auxiliary Box Lead Termination</b> | None                                                |
| <b>Base Indicator</b>                 | Rigid                                               |
| <b>Bearing Grease Type</b>            | Polyrex EM (-20F +300F)                             |
| <b>Blower</b>                         | None                                                |
| <b>Current @ Voltage</b>              | 21.000 A @ 200.0 V                                  |
| <b>Design Code</b>                    | B                                                   |
| <b>Drip Cover</b>                     | No Drip Cover                                       |
| <b>Duty Rating</b>                    | CONT                                                |
| <b>Efficiency @ 100% Load</b>         | 89.5 %                                              |
| <b>Electrically Isolated Bearing</b>  | Not Electrically Isolated                           |
| <b>Feedback Device</b>                | NO FEEDBACK                                         |
| <b>Front Face Code</b>                | Standard                                            |
| <b>Front Shaft Indicator</b>          | None                                                |
| <b>Heater Indicator</b>               | No Heater                                           |
| <b>High Voltage Full Load Amps</b>    | 21.0 a                                              |
| <b>Insulation Class</b>               | F                                                   |

**Part Detail**

|                     |            |
|---------------------|------------|
| <b>Revision</b>     | P          |
| <b>Type</b>         | AC         |
| <b>Mech. spec.</b>  | 07H002     |
| <b>Base</b>         |            |
| <b>Status</b>       | PRD/A      |
| <b>Elec. spec.</b>  | 07WGY364   |
| <b>Layout</b>       | 07LYH002   |
| <b>Eff. date</b>    | 04-29-2024 |
| <b>CD Diagram</b>   | CD0006     |
| <b>Poles</b>        | 02         |
| <b>Leads</b>        | 3#14       |
| <b>Proprietary</b>  | False      |
| <b>Created date</b> | 09-24-2012 |

|                                      |                       |
|--------------------------------------|-----------------------|
| <b>Inverter Code</b>                 | Inverter Ready        |
| <b>KVA Code</b>                      | H                     |
| <b>Lifting Lugs</b>                  | Standard Lifting Lugs |
| <b>Locked Bearing Indicator</b>      | No Locked Bearing     |
| <b>Motor Lead Exit</b>               | Ko Box                |
| <b>Motor Lead Quantity/Wire Size</b> | 3 @ 14 AWG            |
| <b>Motor Lead Termination</b>        | Flying Leads          |
| <b>Motor Standards</b>               | NEMA                  |
| <b>Motor Type</b>                    | 0724M                 |
| <b>Mounting Arrangement</b>          | F1                    |
| <b>Number of Poles</b>               | 2                     |
| <b>Overall Length</b>                | 18.45 IN              |
| <b>Power Factor</b>                  | 85                    |
| <b>Product Family</b>                | General Purpose       |
| <b>Pulley End Bearing Type</b>       | Ball                  |
| <b>Pulley Face Code</b>              | Standard              |
| <b>Pulley Shaft Indicator</b>        | Standard              |
| <b>Rodent Screen</b>                 | None                  |
| <b>Service Factor</b>                | 1.15                  |
| <b>Shaft Diameter</b>                | 1.375 IN              |
| <b>Shaft Extension Location</b>      | Pulley End            |
| <b>Shaft Ground Indicator</b>        | No Shaft Grounding    |
| <b>Shaft Rotation</b>                | Reversible            |
| <b>Shaft Slinger Indicator</b>       | No Slinger            |
| <b>Speed</b>                         | 3500 rpm              |
| <b>Speed Code</b>                    | Single Speed          |
| <b>Starting Method</b>               | Direct on line        |
| <b>Thermal Device - Bearing</b>      | None                  |
| <b>Thermal Device - Winding</b>      | None                  |
| <b>Vibration Sensor Indicator</b>    | No Vibration Sensor   |
| <b>Winding Thermal 1</b>             | None                  |
| <b>Winding Thermal 2</b>             | None                  |

**Nameplate**

| NP3441L                   |              |      |     |      |   |    |   |    |   |  |  |
|---------------------------|--------------|------|-----|------|---|----|---|----|---|--|--|
| CAT.NO.                   | EM3769T-8    |      |     |      |   |    |   |    |   |  |  |
| SPEC.                     | 07H002Y364G1 |      |     |      |   |    |   |    |   |  |  |
| HP                        | 7.5          |      |     |      |   |    |   |    |   |  |  |
| VOLTS                     | 200          |      |     |      |   |    |   |    |   |  |  |
| AMP                       | 21           |      |     |      |   |    |   |    |   |  |  |
| RPM                       | 3500         |      |     |      |   |    |   |    |   |  |  |
| FRAME                     | 213T         |      | HZ  | 60   |   |    |   | PH | 3 |  |  |
| SER.F.                    | 1.15         | CODE | H   | DES  | B | CL | F |    |   |  |  |
| NEMA-NOM-EFF              | 89.5         | PF   | 85  |      |   |    |   |    |   |  |  |
| RATING                    | 40C AMB-CONT |      |     |      |   |    |   |    |   |  |  |
| CC                        | 010A         |      |     |      |   |    |   |    |   |  |  |
| DE                        | 6307         |      | ODE | 6206 |   |    |   |    |   |  |  |
| ENCL                      | TEFC         | SN   |     |      |   |    |   |    |   |  |  |
| VPWM INVERTER READY       |              |      |     |      |   |    |   |    |   |  |  |
| CT6-60H(10:1)VT3-60H(20:1 |              |      |     |      |   |    |   |    |   |  |  |
|                           |              |      |     |      |   |    |   |    |   |  |  |

**Accessories**

| Part number | Description | Multiplier |
|-------------|-------------|------------|
| 37-1304     | C FACE KIT  | A8         |

**AC Induction Motor Performance Data**

Record # 39894

Typical performance - not guaranteed values

| Winding: 07WGY364-R001 |    |       | Type: 0724M         |                                       | Enclosure: TEFC           |            |              |
|------------------------|----|-------|---------------------|---------------------------------------|---------------------------|------------|--------------|
| Nameplate Data         |    |       |                     | 200 V, 60 Hz:<br>Single Voltage Motor |                           |            |              |
| Rated Output (HP)      |    | 7.5   | Full Load Torque    |                                       | 11.2 LB-FT                |            |              |
| Volts                  |    | 200   | Start Configuration |                                       | direct on line            |            |              |
| Full Load Amps         |    | 21    | Breakdown Torque    |                                       | 48.8 LB-FT                |            |              |
| R.P.M.                 |    | 3500  | Pull-up Torque      |                                       | 14.4 LB-FT                |            |              |
| Hz                     | 60 | Phase | 3                   | Locked-rotor Torque                   |                           | 20.3 LB-FT |              |
| NEMA Design Code       |    | B     | KVA Code            | H                                     | Starting Current          |            | 145 A        |
| Service Factor (S.F.)  |    | 1.15  | No-load Current     |                                       | 8.5 A                     |            |              |
| NEMA Nom. Eff.         |    | 89.5  | Power Factor        | 85                                    | Line-line Res. @ 25°C     |            | 0.235 Ω      |
| Rating - Duty          |    | 40C   | AMB-CONT            |                                       | Temp. Rise @ Rated Load   |            | 47°C         |
| S.F. Amps              |    |       |                     |                                       | Temp. Rise @ S.F. Load    |            | 57°C         |
|                        |    |       |                     |                                       | Locked-rotor Power Factor |            | 34           |
|                        |    |       |                     |                                       | Rotor inertia             |            | 0.219 LB-FT2 |

**Load Characteristics 200 V, 60 Hz, 7.5 HP**

| % of Rated Load | 25   | 50   | 75   | 100  | 125  | 150  | S.F. |
|-----------------|------|------|------|------|------|------|------|
| Power Factor    | 49   | 71   | 80   | 85   | 87   | 87   | 86   |
| Efficiency      | 83.2 | 88.9 | 90.3 | 89.8 | 89.3 | 88.4 | 89.5 |
| Speed           | 3574 | 3552 | 3527 | 3500 | 3473 | 3442 | 3484 |
| Line amperes    | 9.87 | 12.8 | 16.8 | 21.1 | 26   | 31.3 | 24   |


ABB Motors and Mechanical Inc.


WINDING # 07WGY364

Typical performance - not guaranteed values.




7.5 HP 3 PH 60 HZ 3500 RPM 200 V 0724M

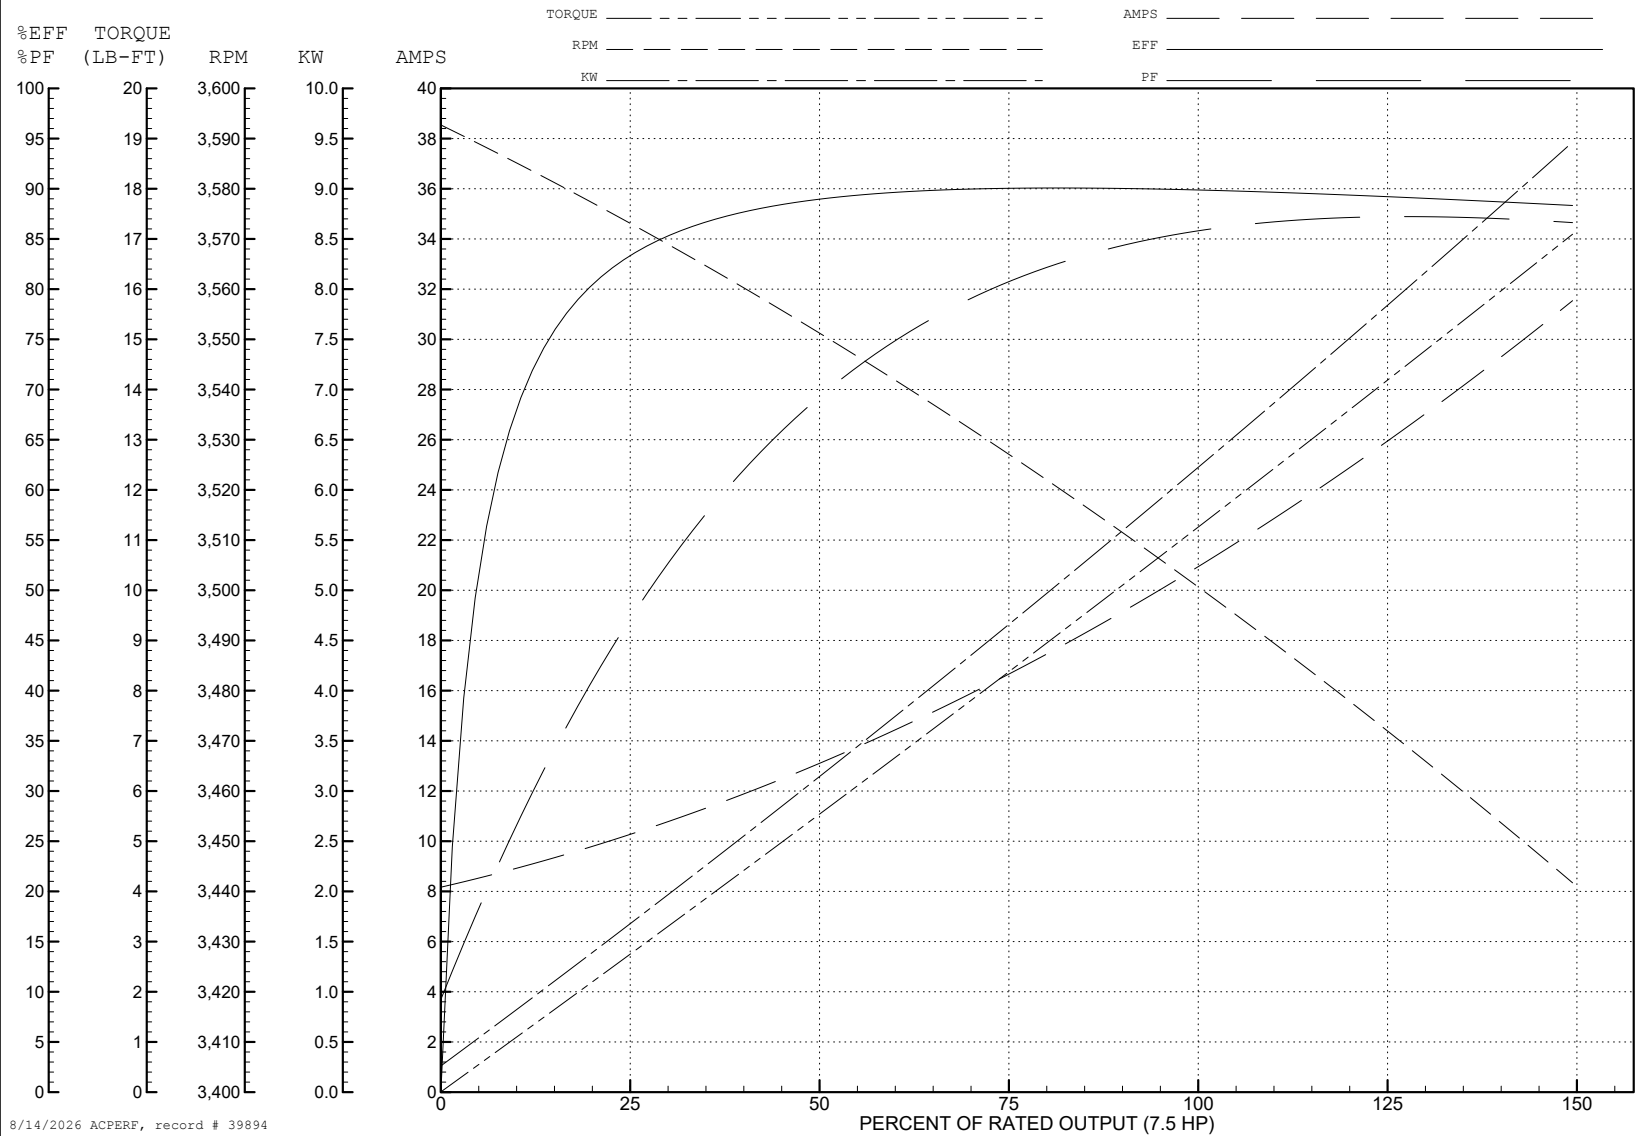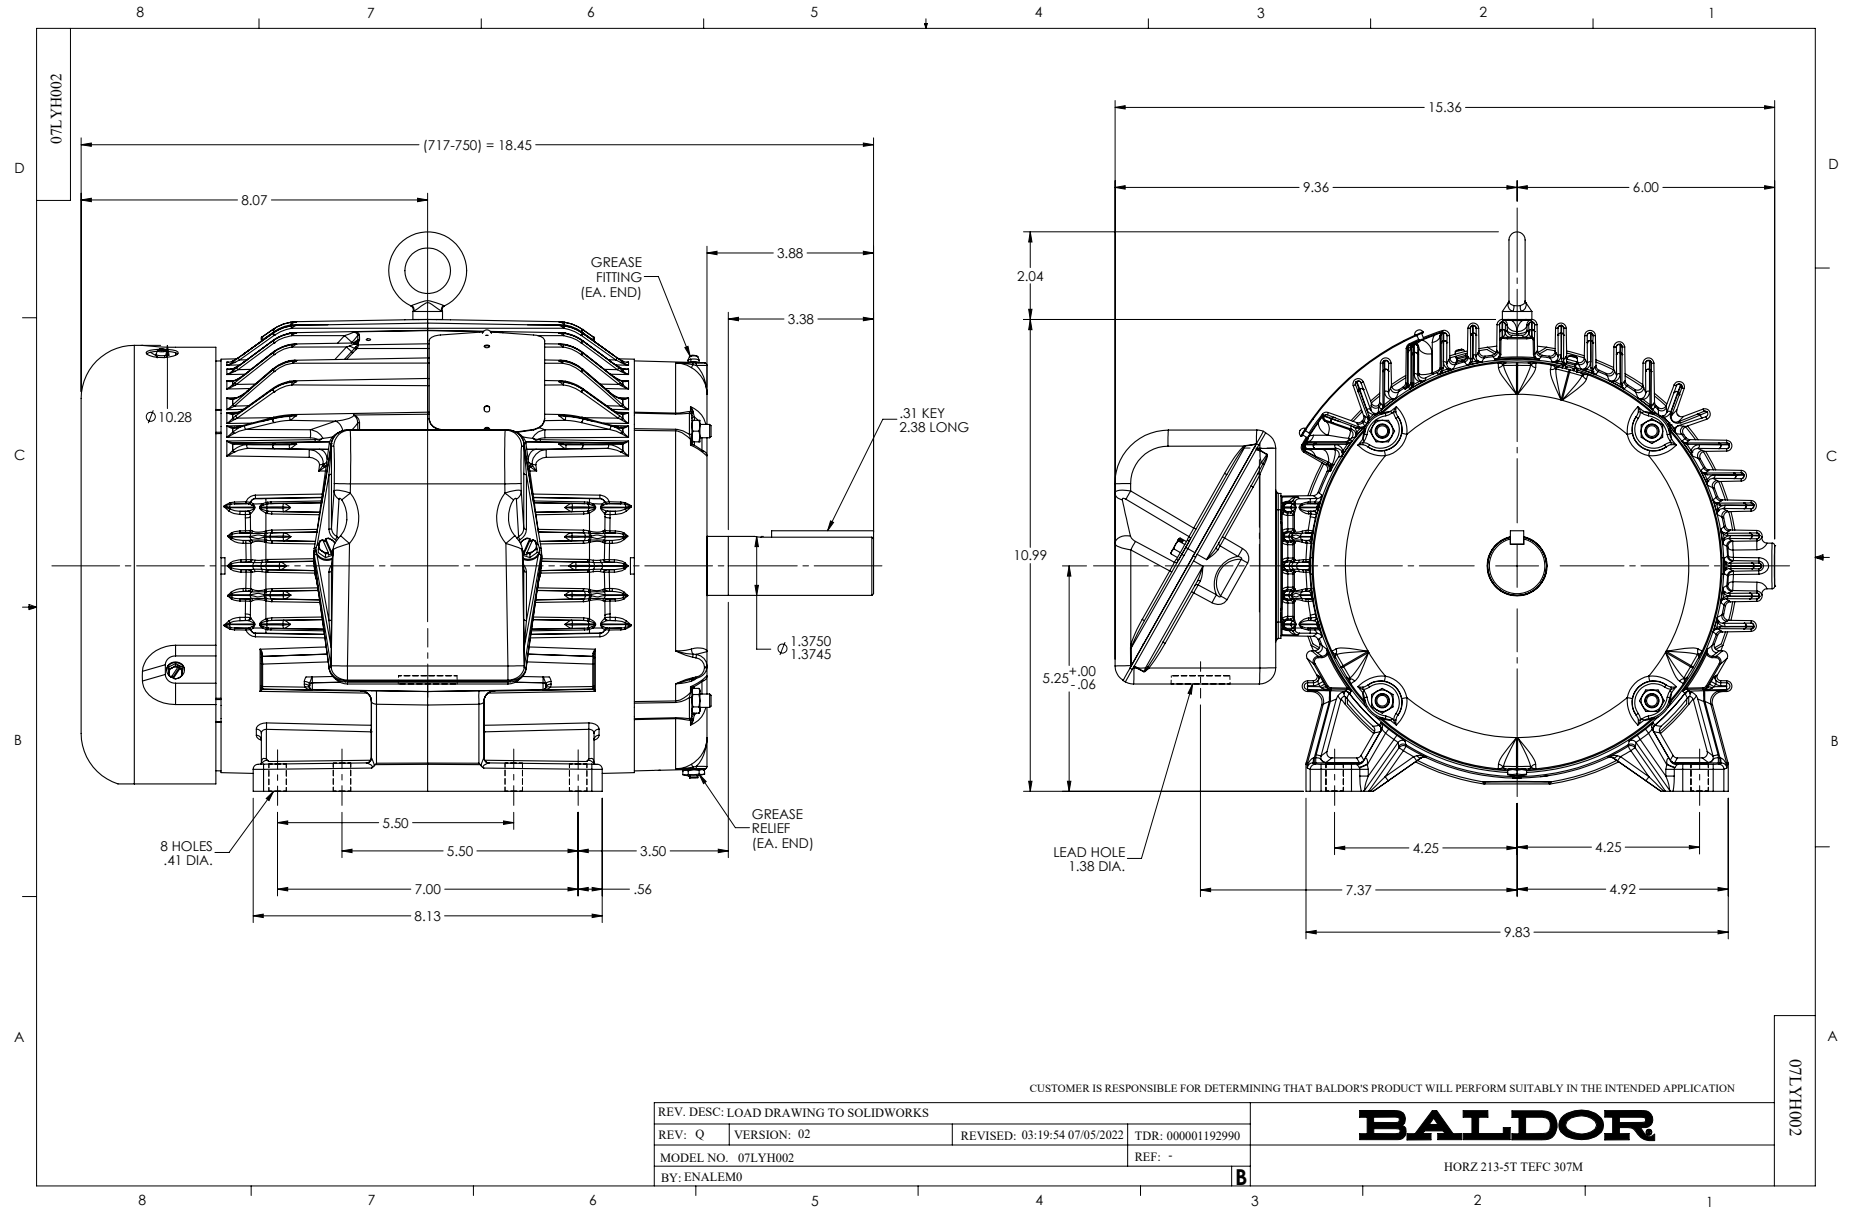TORQUES (LB-FT): PO=48.8 PU=14.4 LR=20.3 LRA=145





CD0006

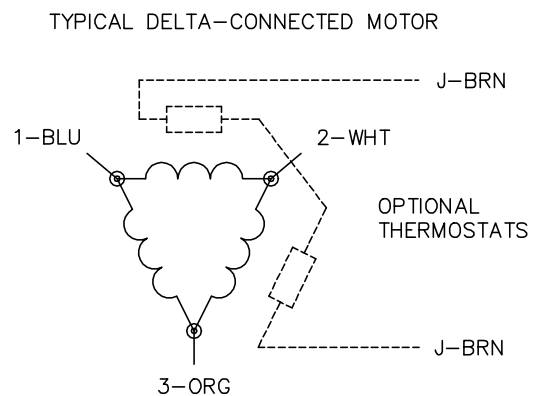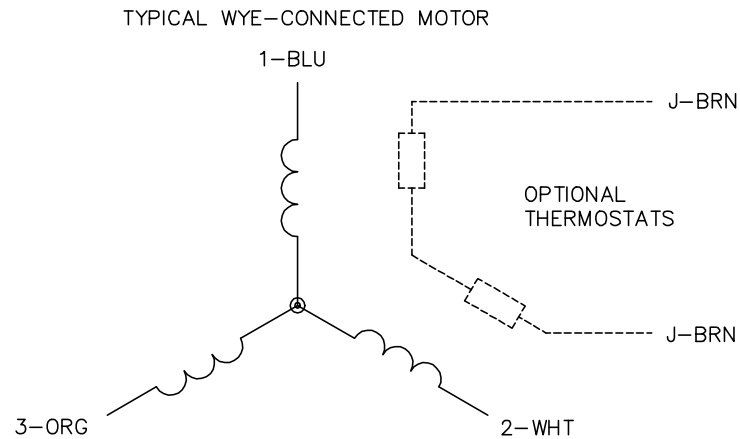
**NOTES:**

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: —


**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1