

ABB BALDOR RELIANCE III

Customer information packet

EM4407T-4

200HP, 1785RPM, 3PH, 60HZ, 447T, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	447T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	200.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	222.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	96.2 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	222.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	6 @ 1/0 AWG
Motor Standards	NEMA

Part Detail

Revision	Q
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG1462
Layout	617435-137
Eff. date	12-06-2024
CD Diagram	416820-008
Poles	04
Leads	6#1/0
Proprietary	False
Created date	09-08-2015

Motor Type	A44120M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	48.24 IN
Power Factor	87
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2349L													
SPEC NO.	A44-0002-4969			CAT.NO.	EM4407T-4				FRAME	447T			
HP	200	VOLTS	460	PHASE	3	DESIGN	B	TYPE	P				
RPM	1785	AMPS	222	HZ	60	AMB	40	SF	1.15				
DRIVE END BEARING	90BC03J30X		DUTY	CONT	INSUL.CLASS		F						
OPP D.E. BEARING	90BC03J30X		ENCL	TEFC	CODE	G							
SER.NO.				POWER FACTOR	87	NEMA-NOM-EFFICIENCY				96.2			
					MAX CORR KVAR	34	GUARANTEED EFFICIENCY		95.4				
					NEMA NOM/CSA QUOTED EFF								
					MOTOR WEIGHT								

Accessories

Part number	Description	Multiplier
089490106A	G28 C-FACE BRKT MACH-6318 089490105WCA	P1
089490110A	D-FLANGE BRKT, G28 089490109WCA	P1

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	447T	200	P	3/60	1785	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
222	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
---	418143052CE	---	---	.0169		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	62.0	1800	4.07	0	
1/4	50.0	88.3	1796	56.3	94.3	
2/4	100	126	1793	77.4	96.2	
3/4	150	172	1789	84.8	96.4	
4/4	200	222	1785	87.6	96.2	
5/4	250	276	1781	88.4	95.8	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	147	865	1428	
PULL UP		540	123	726	1332	
BREAKDOWN		1730	268	1579	770	
FULL LOAD		1785	100	588	222	
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA XE MOTOR-CALCULATED DATA-NEMA NOM. EFF. 96.2 PCT.						
		DR. BY C.D.		A-C MOTOR PERFORMANCE DATA A44WG1462-R001 ISSUE DATE 01/16/20		
		CK. BY E.J. CHRISTIAN				
		APP. BY E.J. CHRISTIAN				
		DATE 07/06/17				

REL S.O.

 RPM **1785**

 S.F. **1.15**

 ROTOR **418143052CE**

 FRAME **447T**

 VOLTS **460**

 NEMA DESIGN **B**

 TEST S.O. **TYPICAL DATA**

 HP **200**

 AMPS **222**

 CODE LETTER **G**

 TEST DATE **---**

 TYPE **P**

 DUTY **CONT**

 ENCLOSURE **TEFC**


 STATOR RES. @ 25 °C **.0169**

 PHASE/HERTZ **3/60**

 AMB °C/INSUL **40/F**

 E/S **---**

OHMS (BETWEEN LINES)

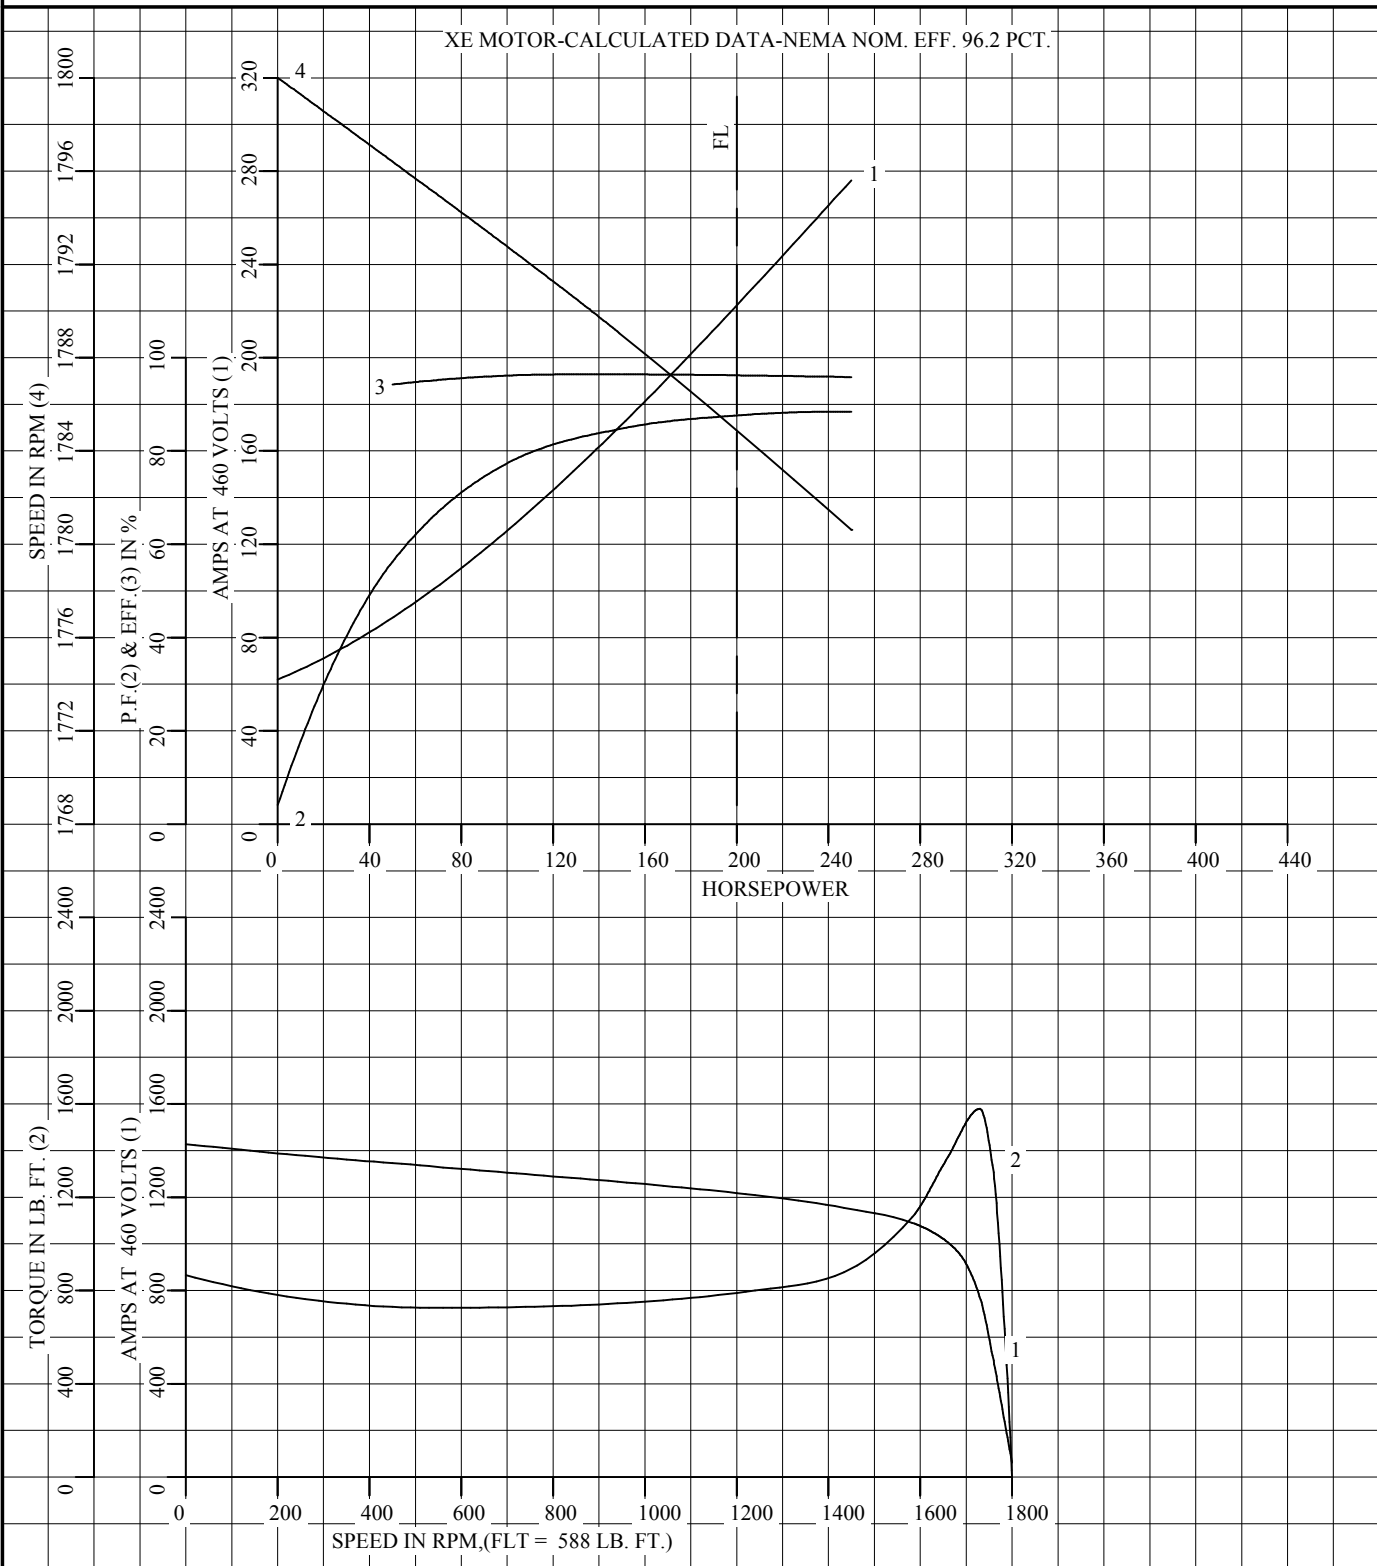

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP

DR. BY C.D.
CK. BY E.J. CHRISTIAN
APP. BY E.J. CHRISTIAN
DATE 07/06/17


**A-C MOTOR
PERFORMANCE
CURVES**

A44WG1462-R001

ISSUE DATE 01/16/20

Page 7 of 10

REL. S.O.	RPM 1785	S.F. 1.15	ROTOR 418143052CE
FRAME 447T	VOLTS 460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
HP 200	AMPS 222	CODE LETTER G	TEST DATE ---
TYPE P	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25 °C .0169
PHASE/HERTZ 3/60	AMB °C/INSUL 40/F	E/S ---	OHMS (BETWEEN LINES)

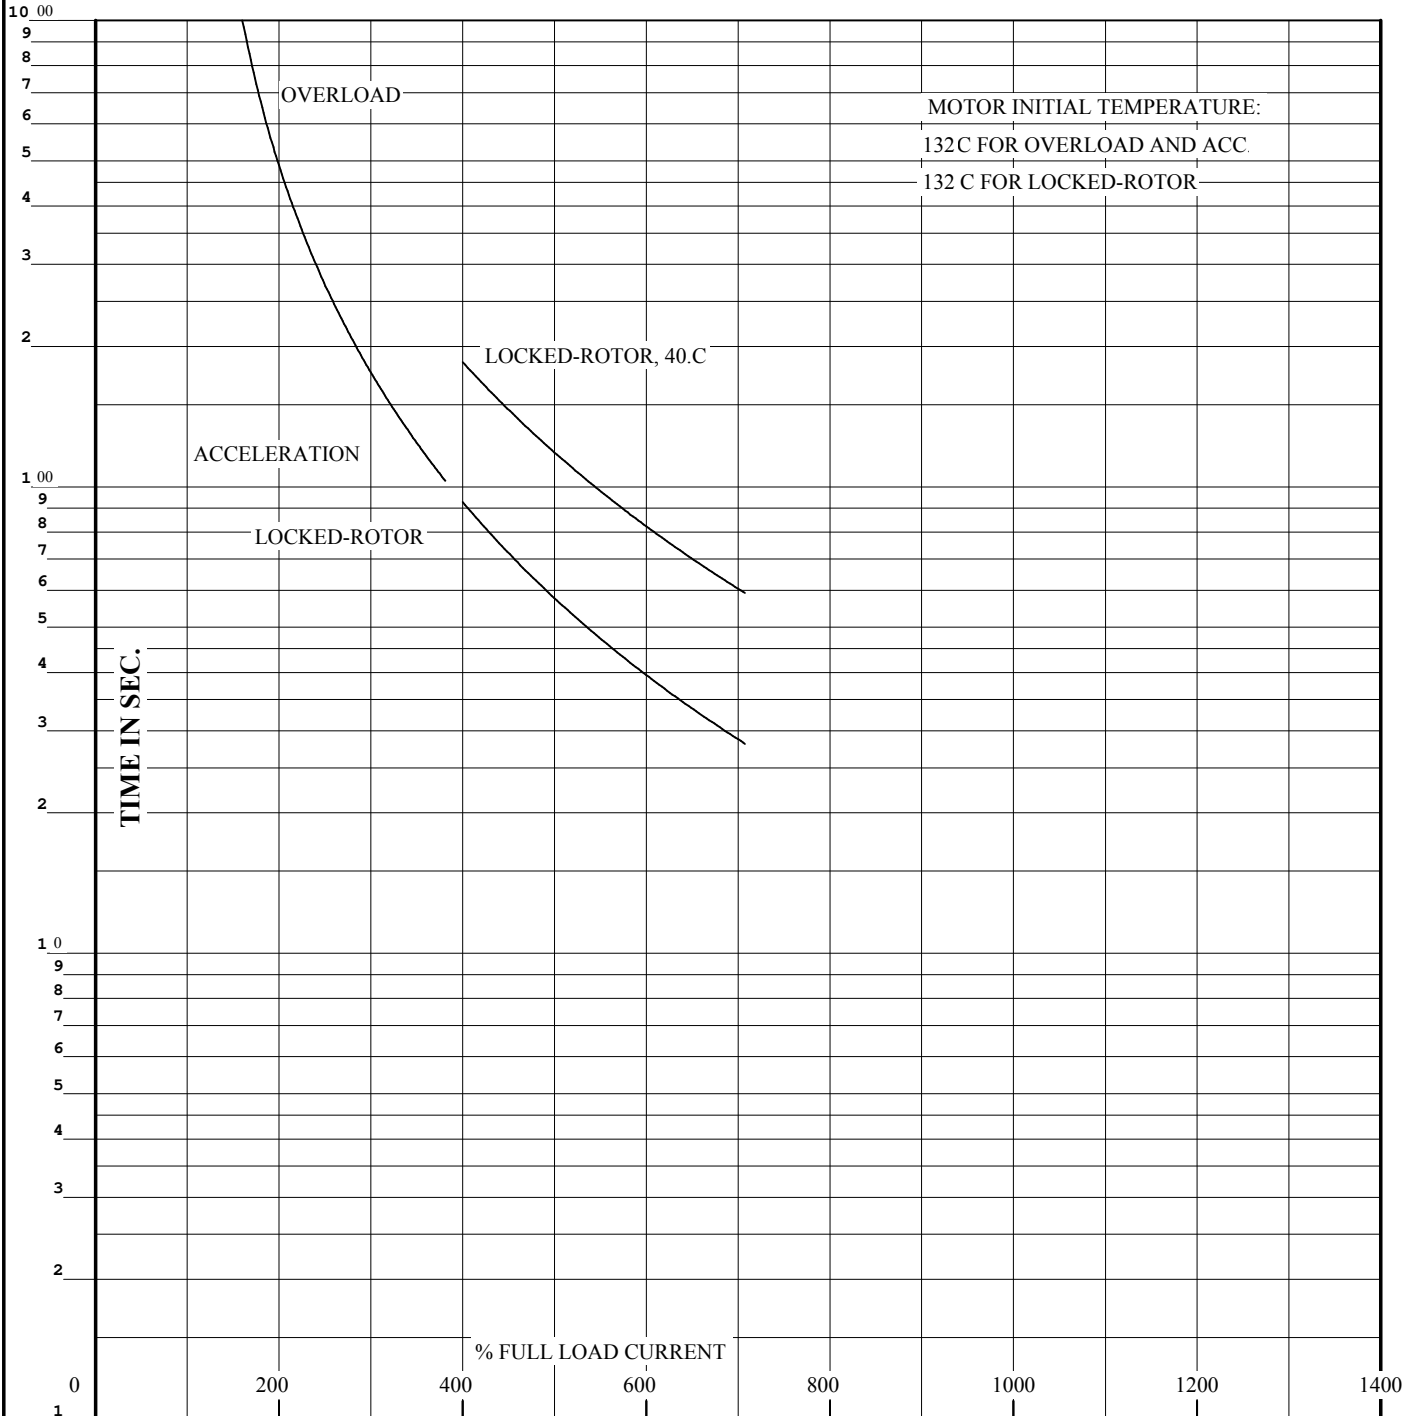

REMARKS: THERMAL LIMIT CURVE
XE MOTOR-CALCULATED DATA-NEMA NOM. EFF. 96.2 PCT.

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.





DR. BY	C.D.
CK. BY	E.J. CHRISTIAN
APP. BY	E.J. CHRISTIAN
DATE	07/06/17

**A-C MOTOR
PERFORMANCE
CURVES**

A44WG1462-R001
ISSUE DATE 01/16/20 Page 8 of 10

617435-137

STEEL CONDUIT BOX

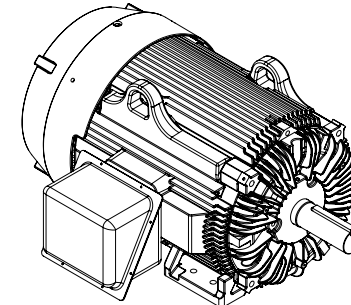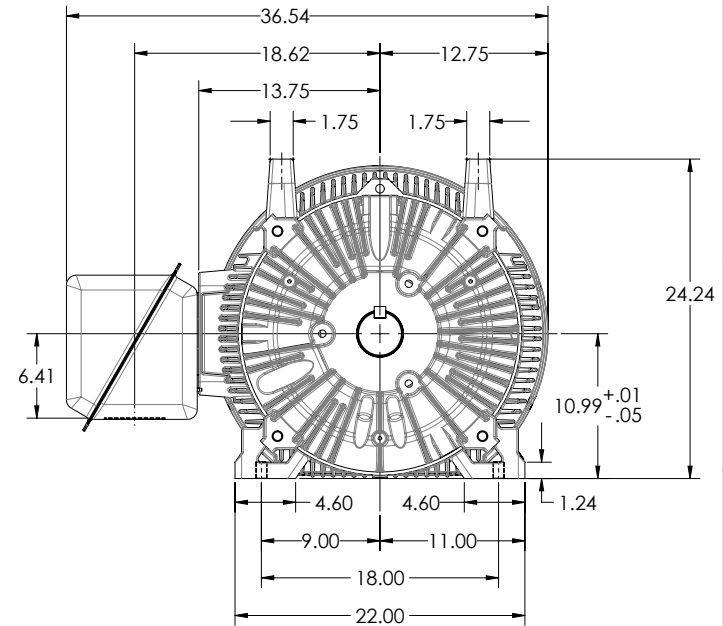

REV. DESC: NEW DRAWING			
REV: *	VERSION: 00	REVISED: 11:29:42 06/27/2016	TDR: 000000984408
MODEL NO. 617435-137			REF: *
BY: USJEDIL		Material: =	C



G447T/445T TEFC F1 FOOTED SIDE/CENTER STEEL CONDUIT BOX

IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .003

416820-008

A-C MOTOR
CONNECTION DIAGRAM

STANDARD 6 LEAD Y START – DELTA RUN

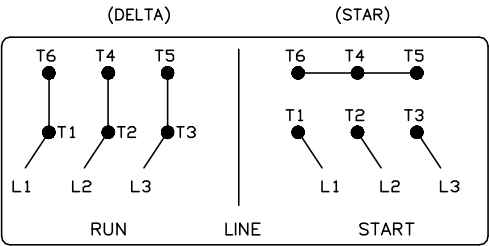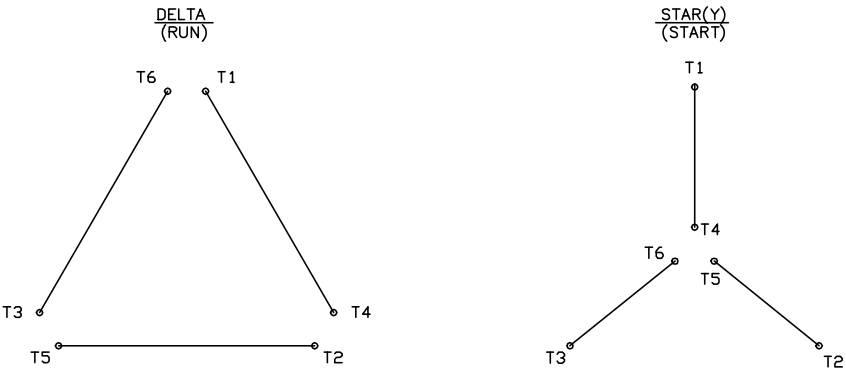

(N. P. 1767-DC)

REV. DESC: ADDED T4 TO Y CONNECT DIAGRAM		
REV. LTR: D	VERSION: 04	TDR: 000000847713
FILE: \RAG\00001\808	REVISED: 10: 41: 26 04/08/2014	BY: RAGJSS1
MTL: —		

BALDOR

CONNECT DIAGRAM STD 6 LEAD Y START DELTA RUN
SH 1 of 1

416820-008