

ABB BALDOR RELIANCE III

Customer information packet

EM4408T-4

250HP, 1785RPM, 3PH, 60HZ, 449T, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	449T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	250.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	276.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	96.2 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	276.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	G
Motor Lead Quantity/Wire Size	6 @ 2/0 AWG
Motor Standards	NEMA
Motor Type	A44144M
Mounting Arrangement	F1

Part Detail

Revision	F
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG4245
Layout	617427-209
Eff. date	09-25-2025
CD Diagram	416820-008
Poles	04
Leads	6#2/0
Proprietary	False
Created date	04-13-2015

Number of Poles	4
Overall Length	53.21 IN
Power Factor	88
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2496L	
MOBIL POLYREX EM	

NP2349L

SPEC NO.	A44-7125-4245			CAT.NO.	EM4408T-4				FRAME	449T	
HP	250	VOLTS	460	PHASE	3	DESIGN	B	TYPE	P		
RPM	1785	AMPS	276	HZ	60	AMB	40	SF	1.15		
DRIVE END BEARING	90BC03J30X		DUTY	CONT	INSUL.CLASS		F				
OPP D.E. BEARING	90BC03J30X		ENCL	TEFC	CODE	G					
SER.NO.				POWER FACTOR	88	NEMA-NOM-EFFICIENCY			96.2		
						MAX CORR KVAR	52.4	GUARANTEED EFFICIENCY		95.4	
						NEMA NOM/CSA QUOTED EFF					
						MOTOR WEIGHT					

CUSTOMER INFORMATION PACKET	FRAME	HP	EM4408T-4 - 250HP, 1785RPM, 3PH, 60HZ, 449T, TEFC, F1	PHASE/ HERTZ	RPM	VOLTS
	449T	250	P	3/60	1785	460

AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
276	CONT	40/F	1.15	B	G	TEFC

E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)
---	418143052LE	---	---	.0128

PERFORMANCE

LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY
NO LOAD	0	71.2	1800	4.35	0
1/4	62.6	97.1	1796	63.9	94.4
2/4	125	148	1792	82.4	96.2
3/4	187	209	1788	87.1	96.4
4/4	250	276	1783	88.3	96.2
5/4	313	345	1778	88.7	95.7

SPEED TORQUE

	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES
LOCKED ROTOR	0	135	994	1807
PULL UP	500	127	934	1719
BREAKDOWN	1725	237	1747	894
FULL LOAD	1783	100	736	276

AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.


CALCULATED DATA
NEMA NOM EFF: 96.2%

FRAME 449T
HP 250
TYPE P
PHASE / HERTZ 3/60


CUSTOMER INFORMATION PACKET
RPM 1785
VOLTS 460
AMPS 276
DUTY CONT
AMB °C / INSUL 40/F

EM4408T-4 - 250HP, 1785RPM, 3PH, 60HZ, 449T, TEFC, F1
S.F. 1.15
NEMA DESIGN B
CODE LETTER G
ENCLOSURE TEFC
E/S ---

ROTOR 418143052LE
TEST S.O. CALCULATED DATA
TEST DATE ---
STATOR RES. @ 25°C .0128
OHMS (BETWEEN LINES)

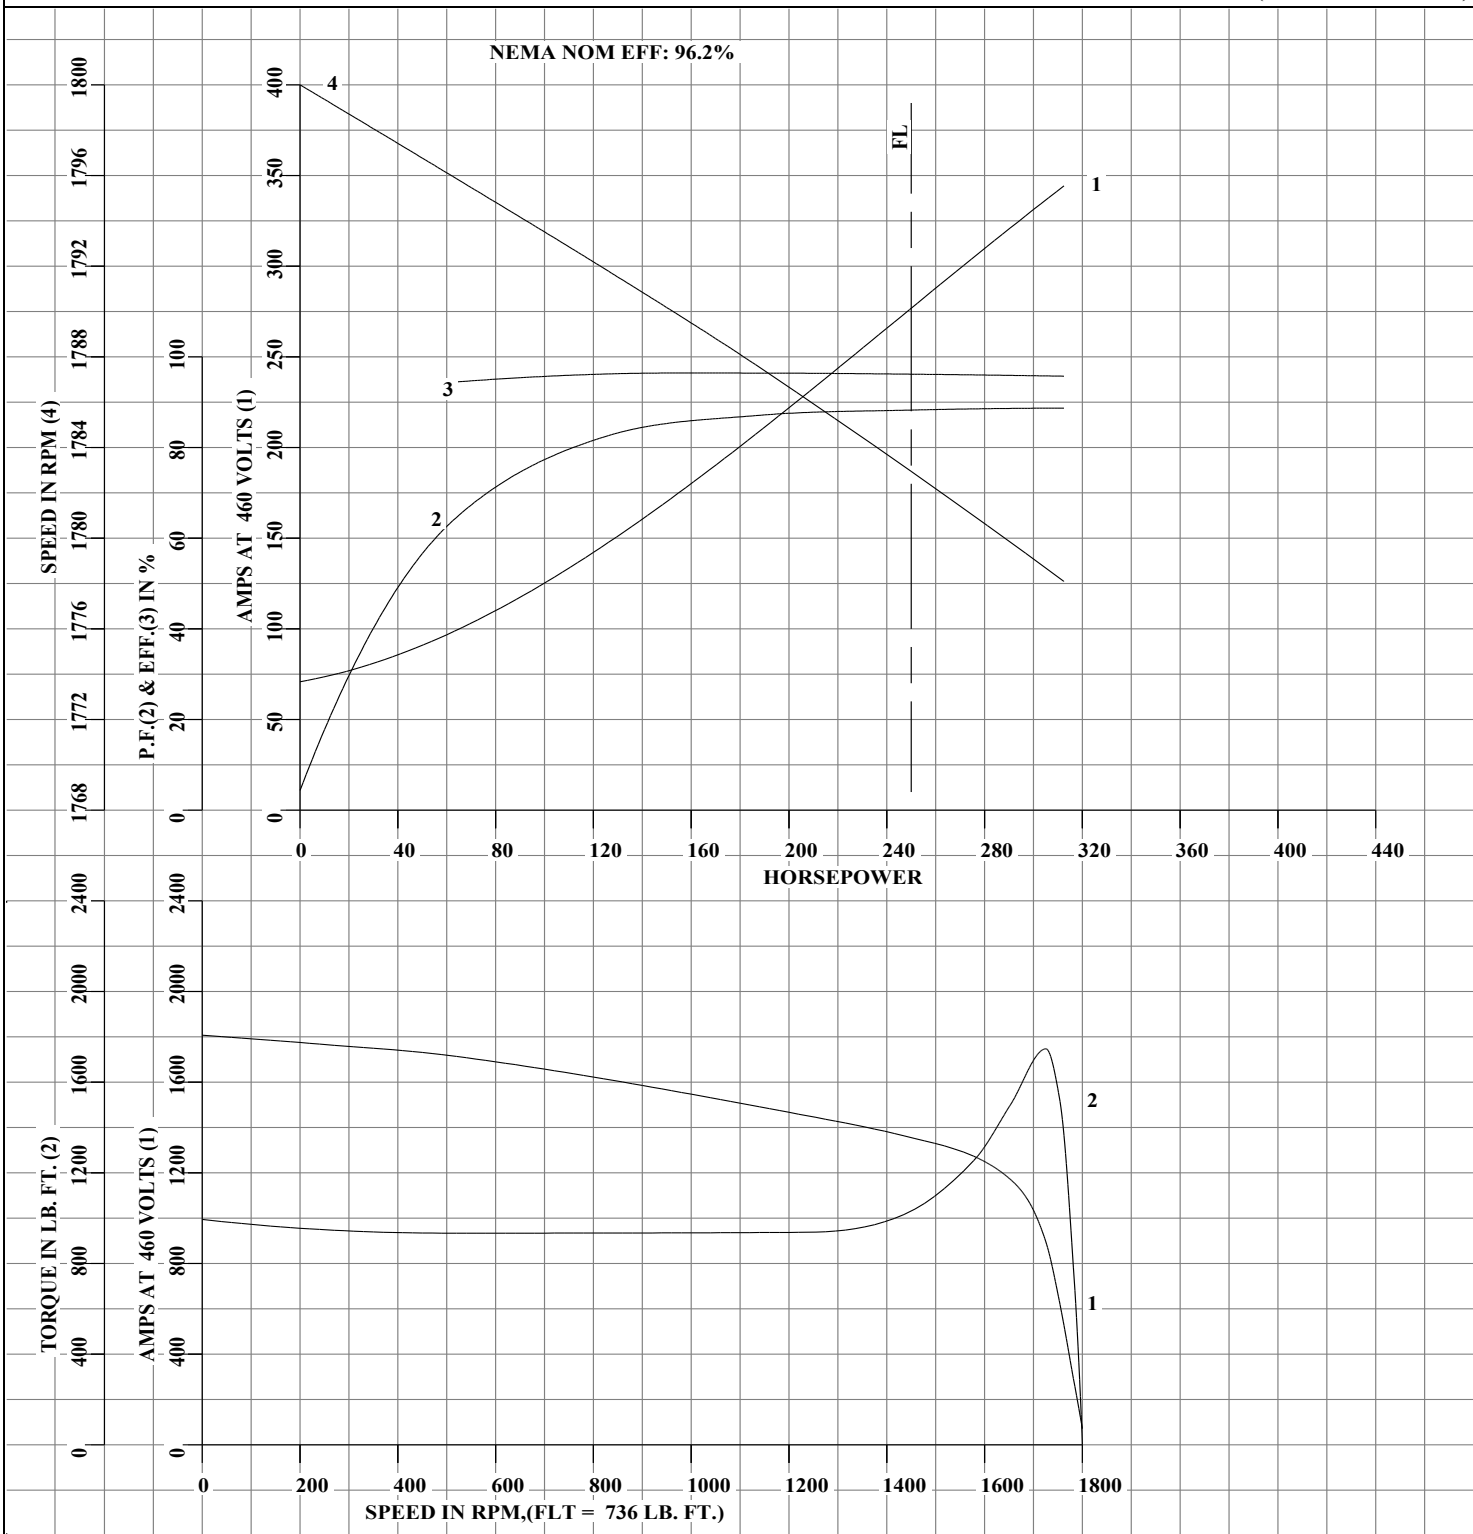



AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

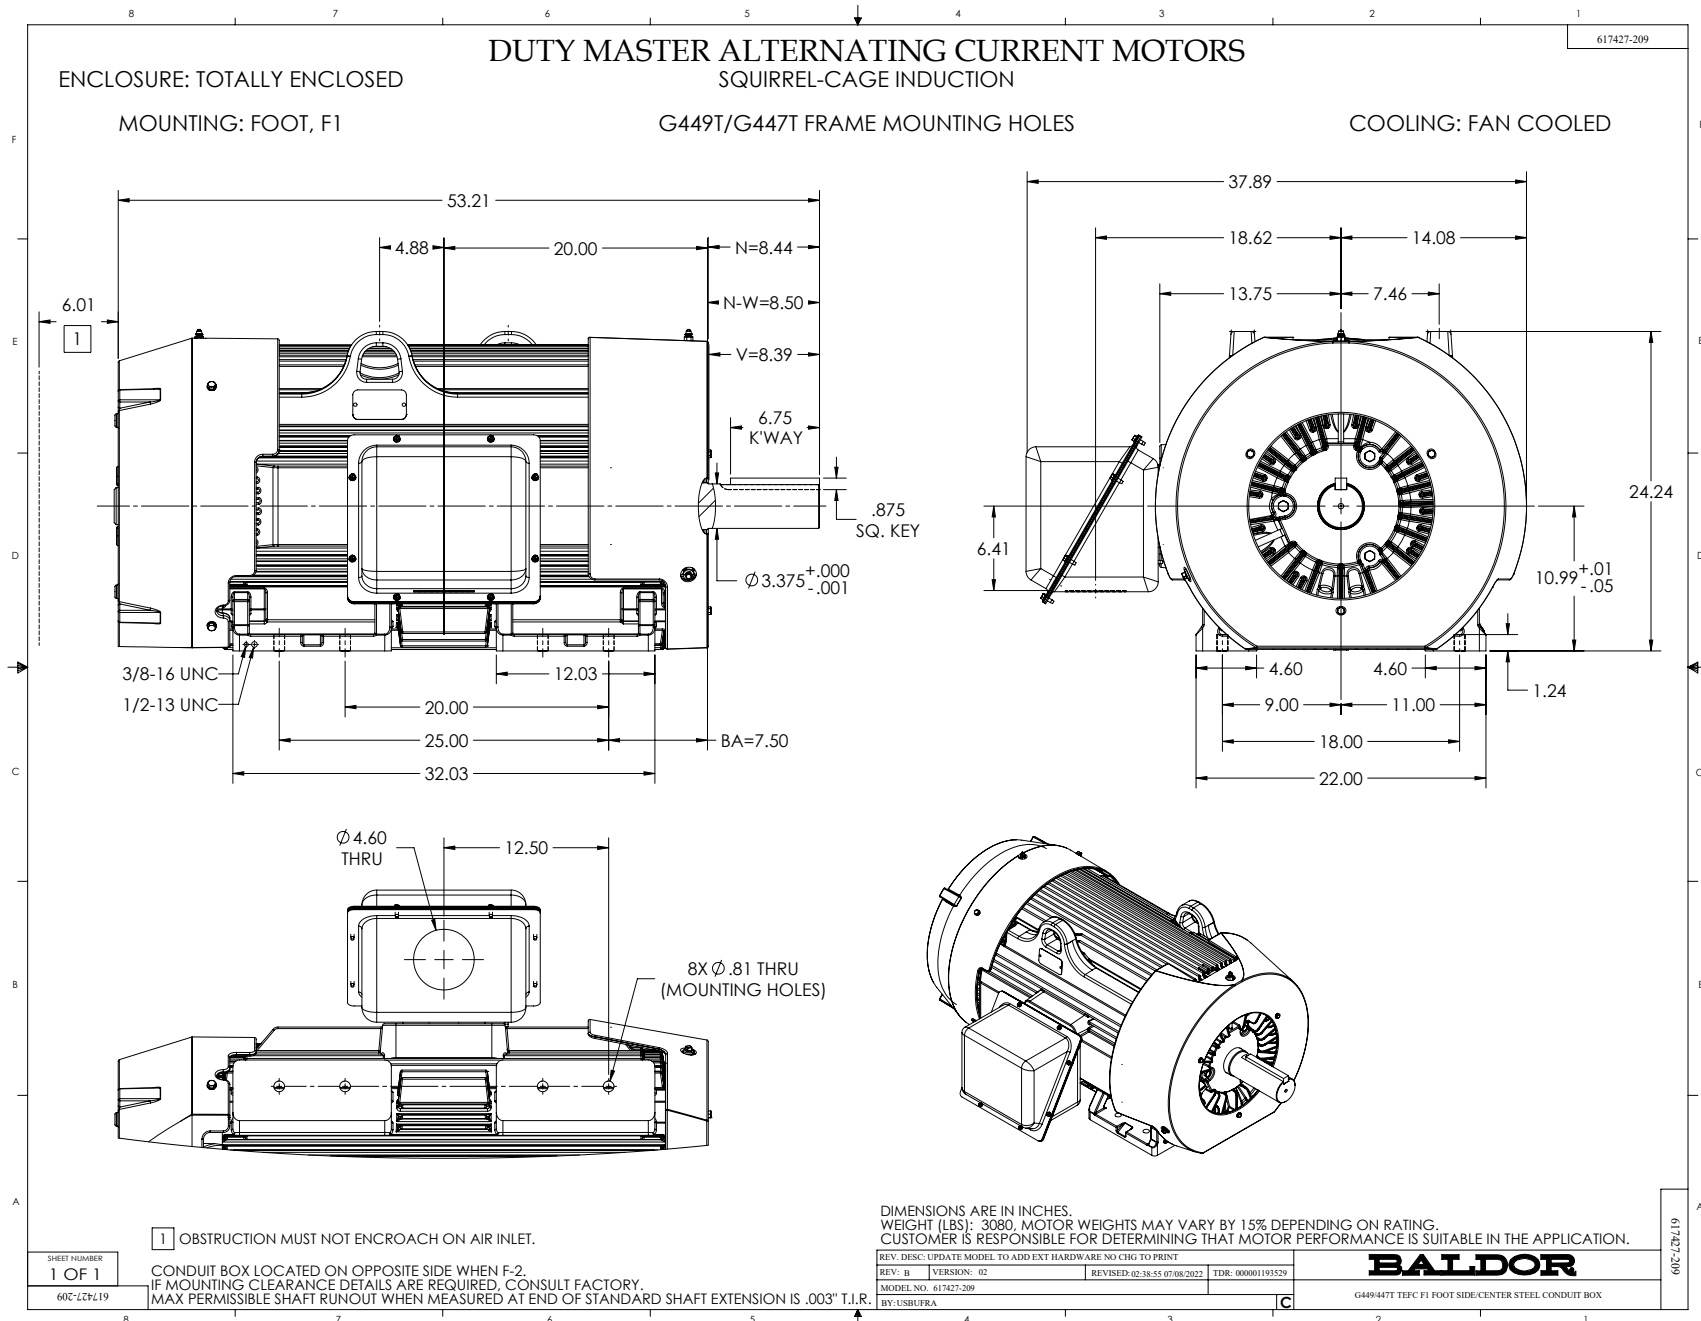

416820-008

A-C MOTOR
CONNECTION DIAGRAM

STANDARD 6 LEAD Y START – DELTA RUN

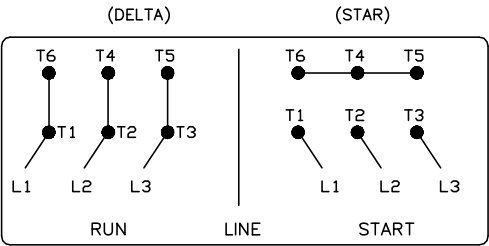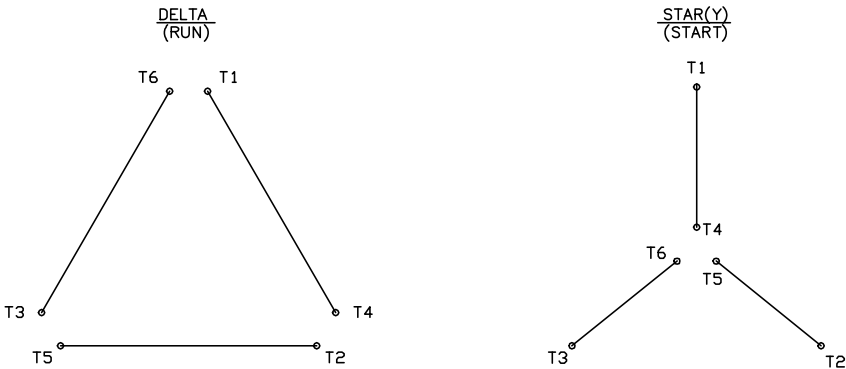

(N. P. 1767-DC)

REV. DESC: ADDED T4 TO Y CONNECT DIAGRAM

REV. LTR: D

VERSION: 04

TDR: 000000847713

FILE: \RAG\00001\808

REVISED: 10: 41: 26 04/08/2014

BY: RAGJSS1

MTL: -

BALDOR

CONNECT DIAGRAM STD 6 LEAD Y START DELTA RUN

SH 1 of 1

416820-008