

ABB BALDOR RELIANCE III

Customer information packet

EM7114T-C

1//.75HP, 1760//1460RPM, 3PH, 60//50HZ, 143T

Class - CLI GP C,D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	143T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 50 HZ 1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	UL CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.000 A @ 230.0 V 3.100 A @ 208.0 V 3.000 A @ 190.0 V 1.500 A @ 460.0 V 1.400 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover

Part Detail

Revision	P
Type	AC
Mech. spec.	05E347
Base	
Status	INA/A
Elec. spec.	05WGX122
Layout	05LYE347
Eff. date	03-09-2021
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	08-03-2010

Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Haz Area Temp Code	T4
Heater Indicator	No Heater
High Voltage Full Load Amps	1.4 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X0518M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	16.28 IN
Power Factor	71
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible

Shaft Slinger Indicator	No Slinger
Speed	1460 rpm
	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP0978XPSL											
NO.								CC	010A		
SER.								TEMP CODE		T4	
SPEC.	05E347X122G1										
CAT.NO.											
HP	1//.75										
VOLTS	230/460//190/380										
AMPS	3/1.5//3/1.4										
RPM	1760//1460					MOTOR WEIGHT			78		
HERTZ	60//50		PH	3	CL	B	DE BRG	6205			
SER.F.	1.00		DES	B	CODE		L	ODE BRG	6203		
FRAME	143T		GREASE			POLYREX EM					
RATING	40C AMB-CONT										
NEMA-NOM-EFF	85.5	PF	71								

AC Induction Motor Performance Data

Record # 36134

Typical performance - not guaranteed values

Winding: 05WGX122-R002				Type: 0518M		Enclosure: XPFC	
Nameplate Data						460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)		1//.75		Full Load Torque		2.98 LB-FT	
Volts		230/460//190/380		Start Configuration		direct on line	
Full Load Amps		3/1.5//3/1.4		Breakdown Torque		12.7 LB-FT	
R.P.M.		1760//1460		Pull-up Torque		7.92 LB-FT	
Hz		60//50		Phase		3	
NEMA Design Code		B		KVA Code		L	
Service Factor (S.F.)						1	
NEMA Nom. Eff.		85.5		Power Factor		71	
Rating - Duty		40C		AMB-CONT			
						Temp. Rise @ Rated Load	
						Locked-rotor Power Factor	
						Rotor inertia	

Load Characteristics 460 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	30	48	61	70	76	80
Efficiency	72.2	82.2	85.2	86	85.6	84.7
Speed	1790	1781	1771	1760	1748	1736
Line amperes	1.07	1.19	1.35	1.55	1.8	2.06


ABB Motors and Mechanical Inc.

WINDING # 05WGX122

Typical performance - not guaranteed values.

1 HP 3 PH 60 HZ 1760 RPM 460 V 0518M

TORQUES (LB-FT): PO=12.7 PU=7.92 LR=8.7 LRA=12.2

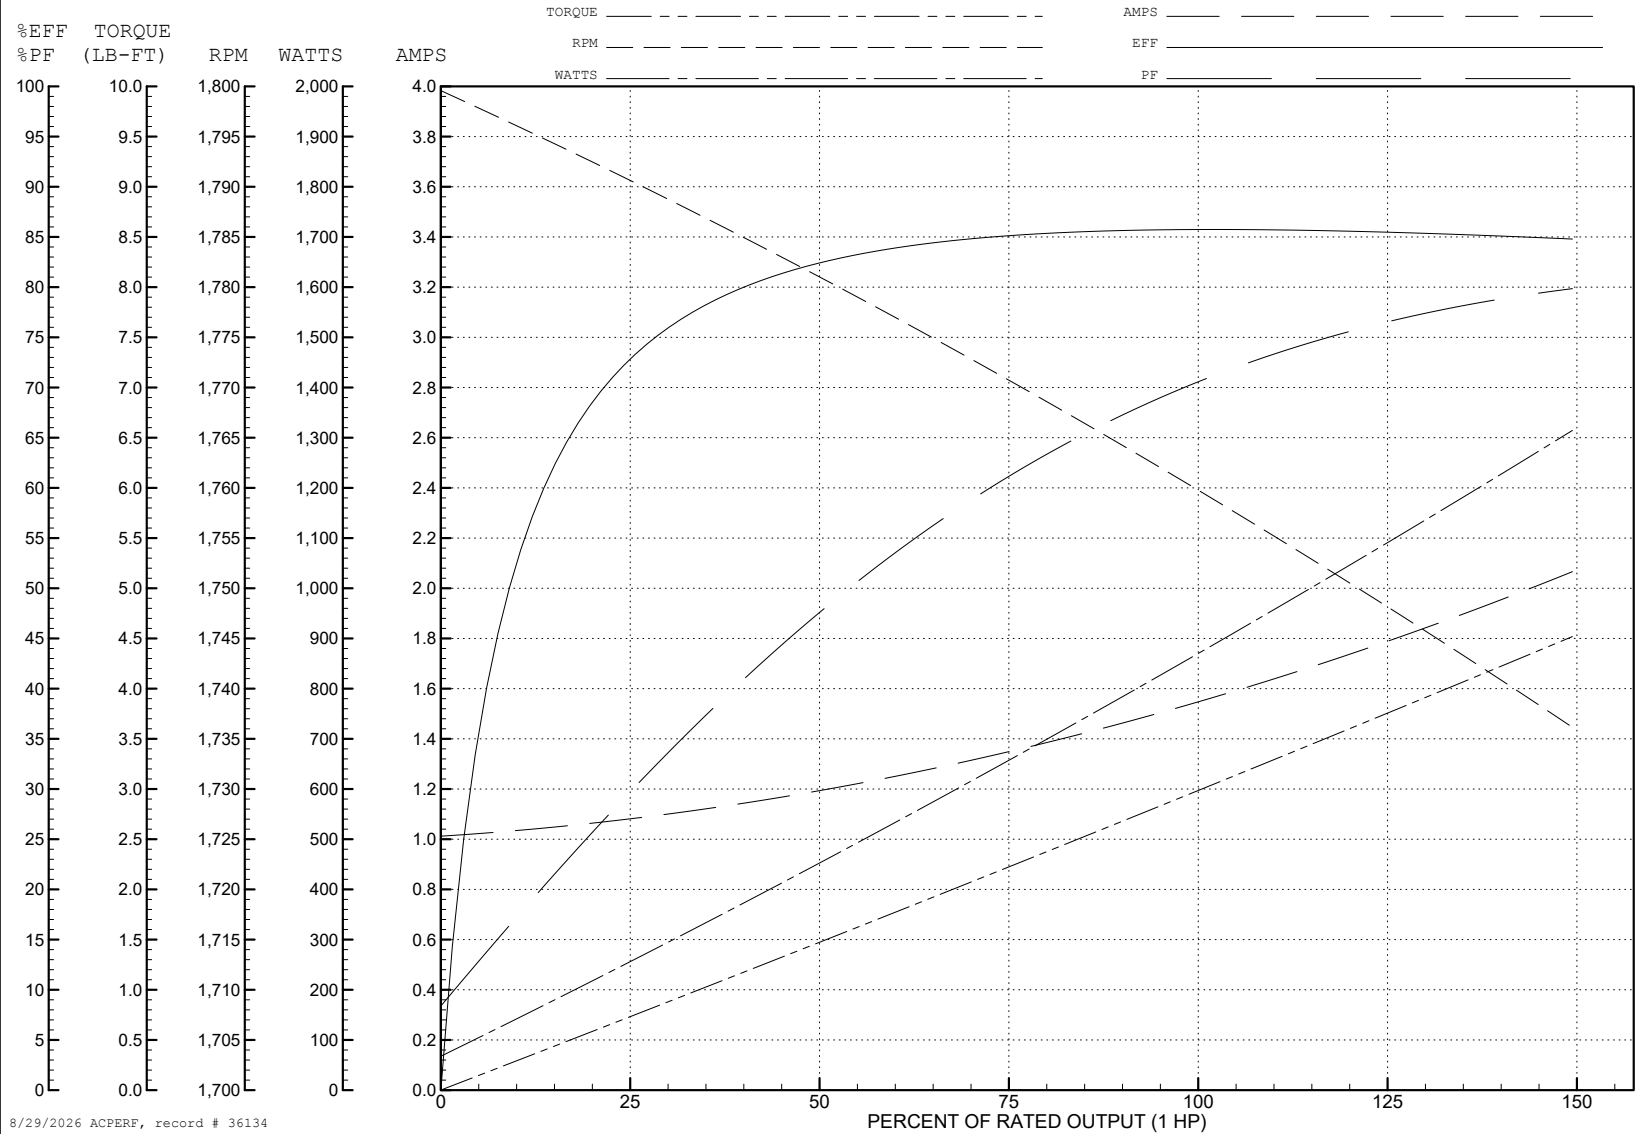

8/29/2026 ACPERF, record # 36134

AC Induction Motor Performance Data

Record # 36135

Typical performance - not guaranteed values

Winding: 05WGX122-R002			Type: 0518M		Enclosure: XPFC			
Nameplate Data				380 V, 50 Hz: High Voltage Connection				
Rated Output (HP)		1//.75		Full Load Torque		2.69 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		3/1.5//3/1.4		Breakdown Torque		11.7 LB-FT		
R.P.M.		1760//1460		Pull-up Torque		7.84 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		8.61 LB-FT	
NEMA Design Code		B		KVA Code	L	Starting Current		11.4 A
Service Factor (S.F.)		1		No-load Current				1 A
NEMA Nom. Eff.		85.5	Power Factor		71	Line-line Res. @ 25°C		15.4 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load				26°C
				Locked-rotor Power Factor				59.7
				Rotor inertia				0.106 LB-FT2

Load Characteristics 380 V, 50 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	28	47	59	69	75	79
Efficiency	71	80.9	84.2	85.2	84.7	83.7
Speed	1491	1482	1474	1464	1453	1442
Line amperes	1.04	1.14	1.28	1.45	1.67	1.91


ABB Motors and Mechanical Inc.

WINDING # 05WGX122

Typical performance - not guaranteed values.

0.75 HP 3 PH 50 HZ 1464 RPM 380 V 0518M

TORQUES (LB-FT): PO=11.7 PU=7.84 LR=8.61 LRA=11.4

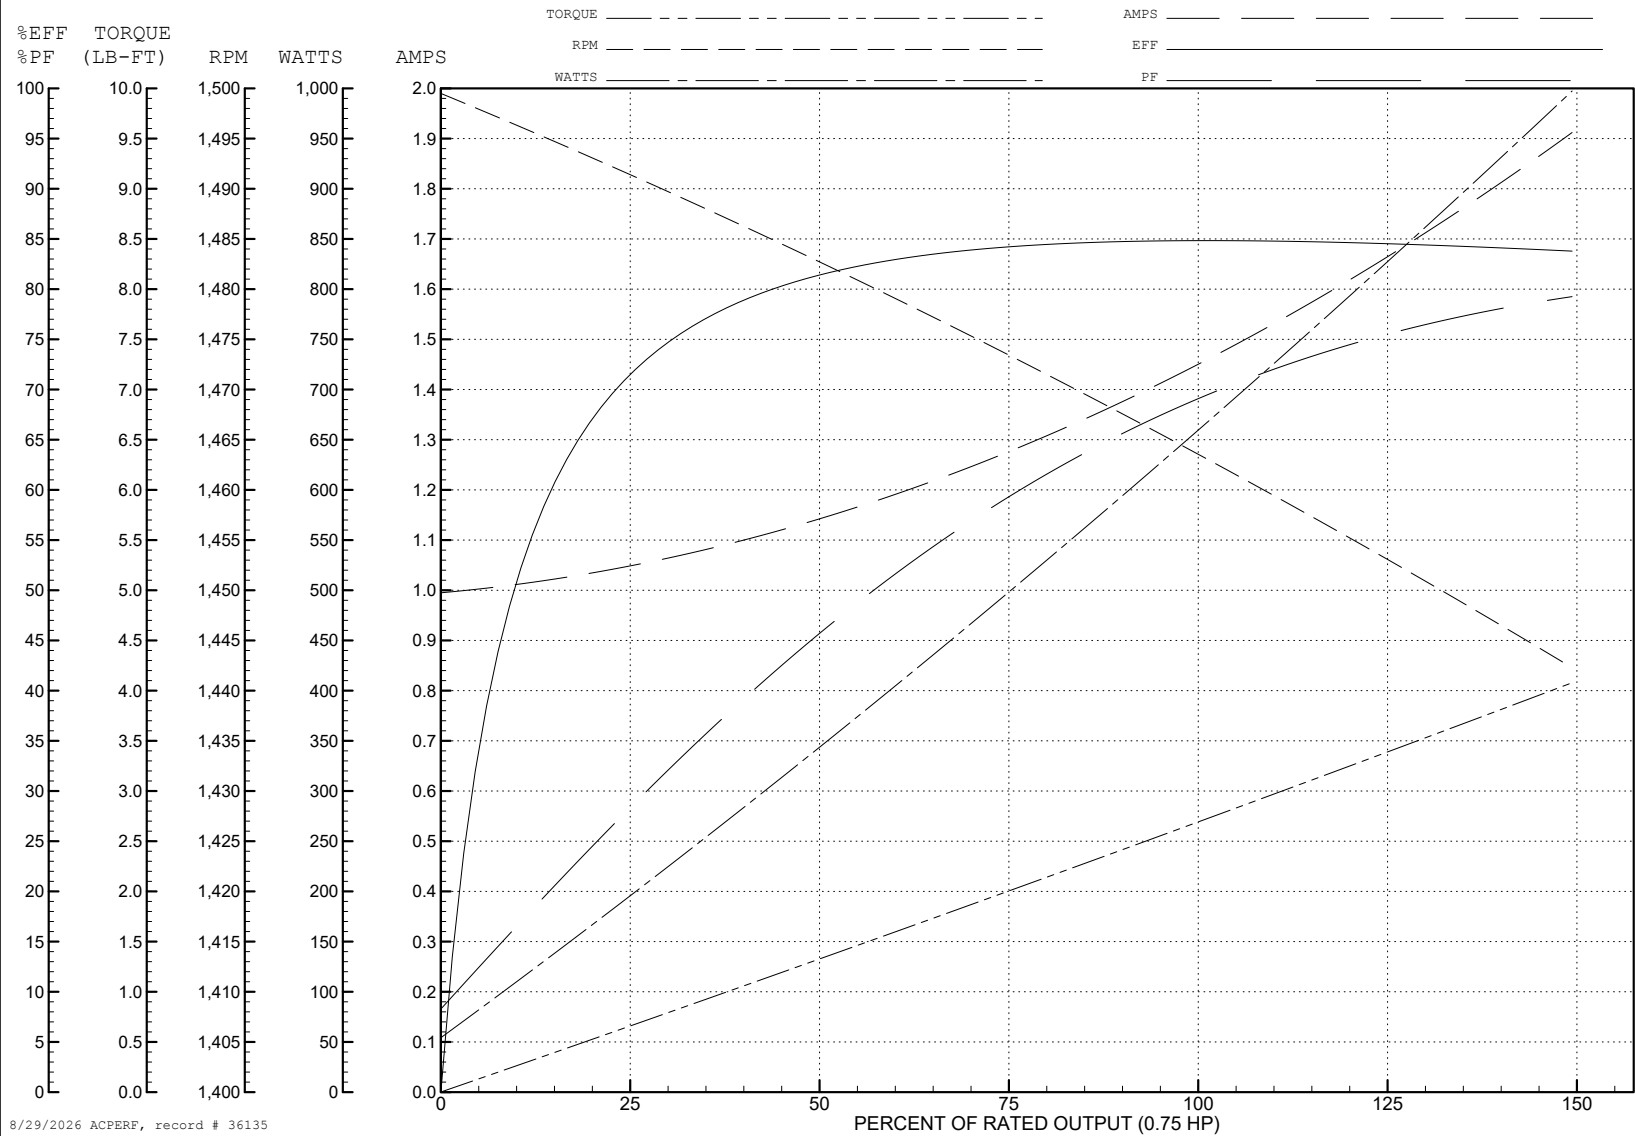

8/29/2026 ACPERF, record # 36135

