ABB BALDOR RELIANCE

Customer information packet

EM7114T

1//.75HP, 1760//1460RPM, 3PH, 60//50HZ, 143T
Class - CLI GP D; CLII GP F,G
Division - Division I

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/11/2026 4:17:55 PM

Specifications

Enclosure	XPFC
Frame	143T
Frame Material	Iron
Frequency	50.00 Hz
	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 50 HZ
	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	380.0 V @ 50 HZ
	230.0 V @ 60 HZ
	190.0 V @ 50 HZ
Agency Approvals	CSA EEV
	UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.260 A @ 230.0 V
	3.200 A @ 208.0 V
	3.040 A @ 190.0 V
	1.630 A @ 460.0 V
	1.520 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part Detail

Revision	C
Type	AC
Mech. spec.	05E346
Base	
Status	PRD/A
Elec. spec.	05WGX508
Layout	05LYE346
Eff. date	04-08-2026
CD Diagram	CD0005
Poles	04
Leads	9#18 Y
Proprietary	False
Created date	01-10-2022

Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	N
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X0520M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	16.28 IN
Power Factor	67
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1470 rpm
	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line

Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1426XPSLEV							
NO.		**CC**	010A				
SER.							
SPEC.	05E346X508G1						
CAT.NO.							
HP	1//.75	**T. CODE**	T3C				
VOLTS	230/460//190/380						
AMPS	3.26/1.63//3.04/1.52						
RPM	1760//1470						
HZ	60//50	**PH**	3	**CL**	F		
SER.F.	1.00	**DES**	B	**CODE**	N		
RATING	40C AMB-CONT						
FRAME	143T	**NEMA-NOM-EFF**	85.5				
		PF	67				
BLANK							

AC Induction Motor Performance Data
Record # 86915
Typical performance - not guaranteed values

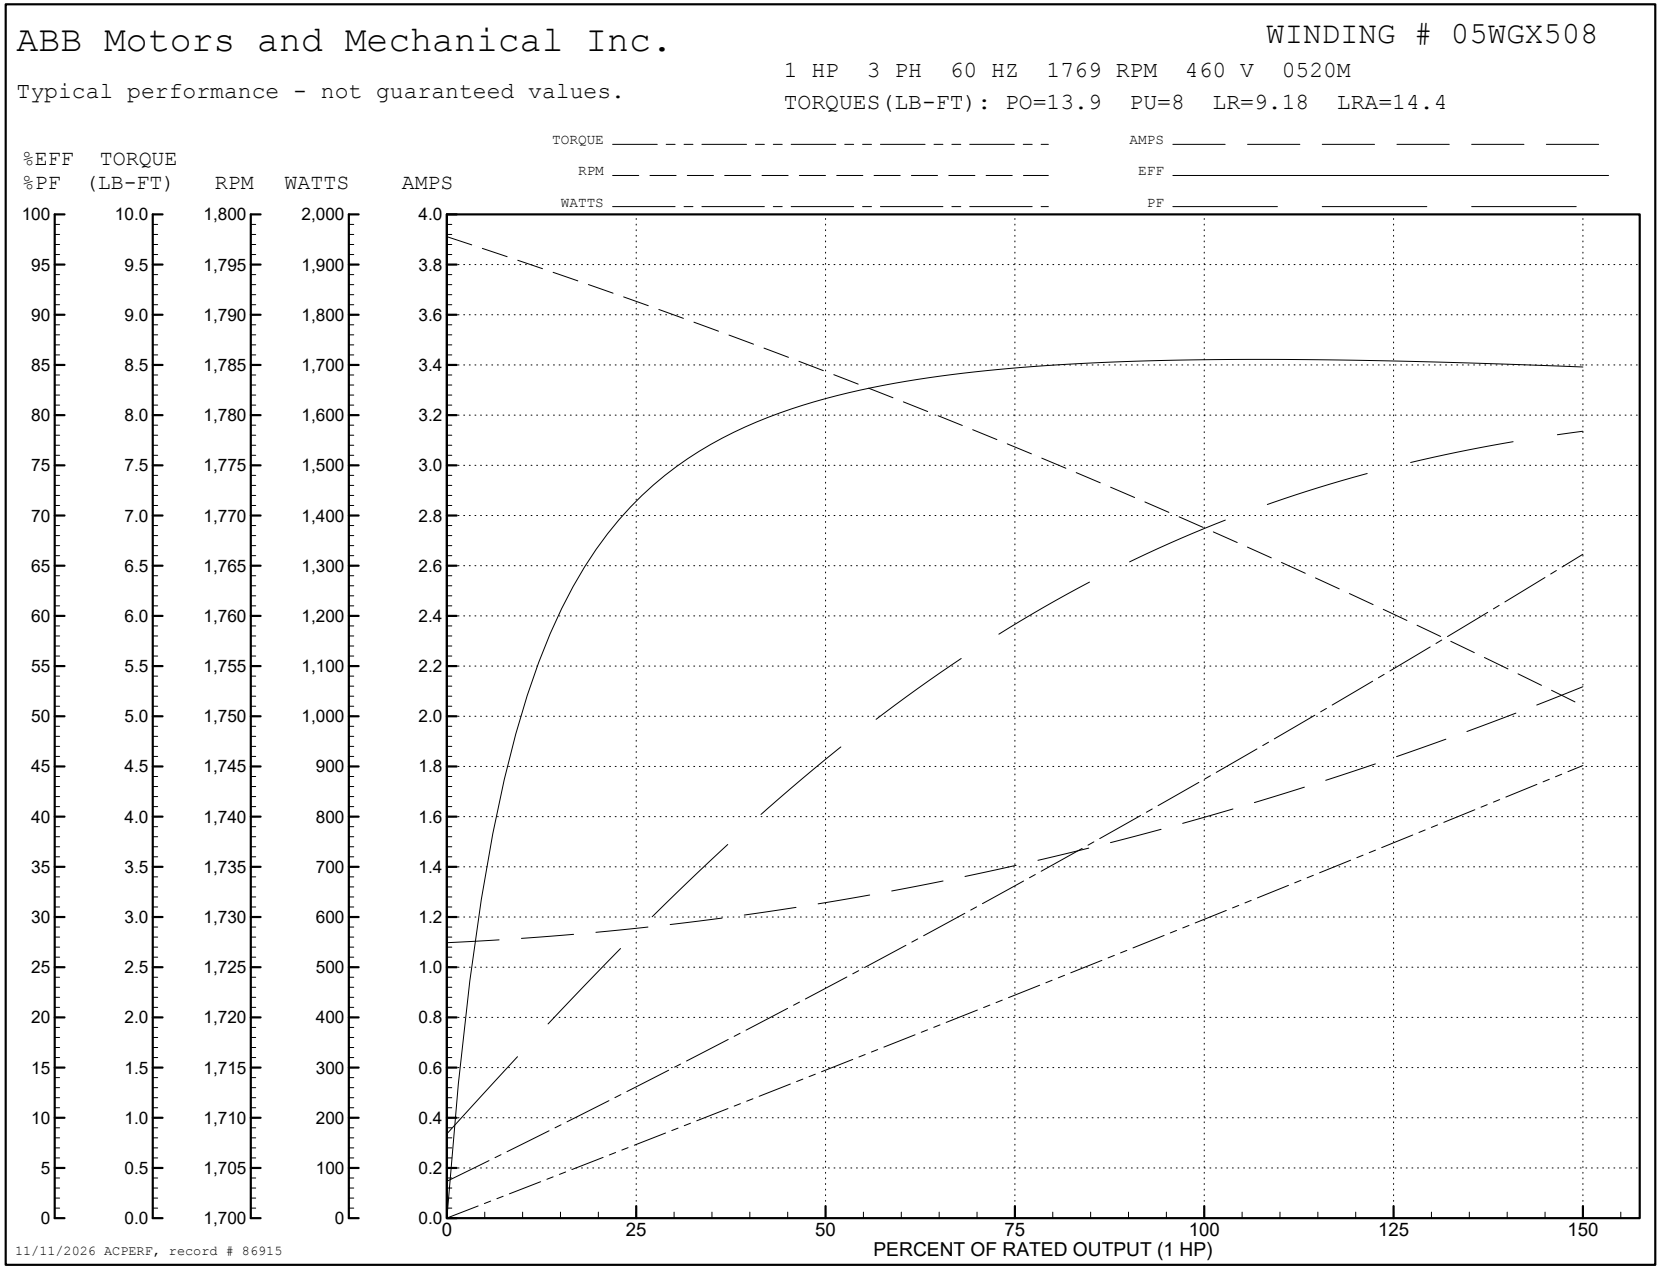
Winding: 05WGX508-R005	**Type:** 0520M	**Enclosure:** XPFC

Nameplate Data			
Rated Output (HP)			1//.75
Volts			230/460//190/380
Full Load Amps			3.26/1.63//3.04/1.52
R.P.M.			1760//1470
Hz	60//50	**Phase**	3
NEMA Design Code	B	**KVA Code**	N
Service Factor (S.F.)			1
NEMA Nom. Eff.	85.5	**Power Factor**	67
Rating - Duty			40C AMB-CONT

460 V, 60 Hz: High Voltage Connection	
Full Load Torque	2.98 LB-FT
Start Configuration	direct on line
Breakdown Torque	13.9 LB-FT
Pull-up Torque	8 LB-FT
Locked-rotor Torque	9.18 LB-FT
Starting Current	14.4 A
No-load Current	1.11 A
Line-line Res. @ 25ºC	16.7 Ω
Temp. Rise @ Rated Load	24°C
Locked-rotor Power Factor	61.9
Rotor inertia	0.144 lb-ft²

Load Characteristics 460 V, 60 Hz, 1 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	29	46	59	68	75	79
Efficiency	71.3	81.3	84.7	85.6	85.4	84.7
Speed	1791	1784	1777	1769	1760	1751
Line amperes	1.14	1.25	1.41	1.61	1.84	2.11


ABB Motors and Mechanical Inc.
WINDING # 05WGX508
1 HP 3 PH 60 HZ 1769 RPM 460 V 0520M
Typical performance - not guaranteed values.
TORQUES(LB-FT): PO=13.9 PU=8 LR=9.18 LRA=14.4
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (1 HP)
11/11/2026 ACPERF, record # 86915

AC Induction Motor Performance Data
Record # 86916
Typical performance - not guaranteed values

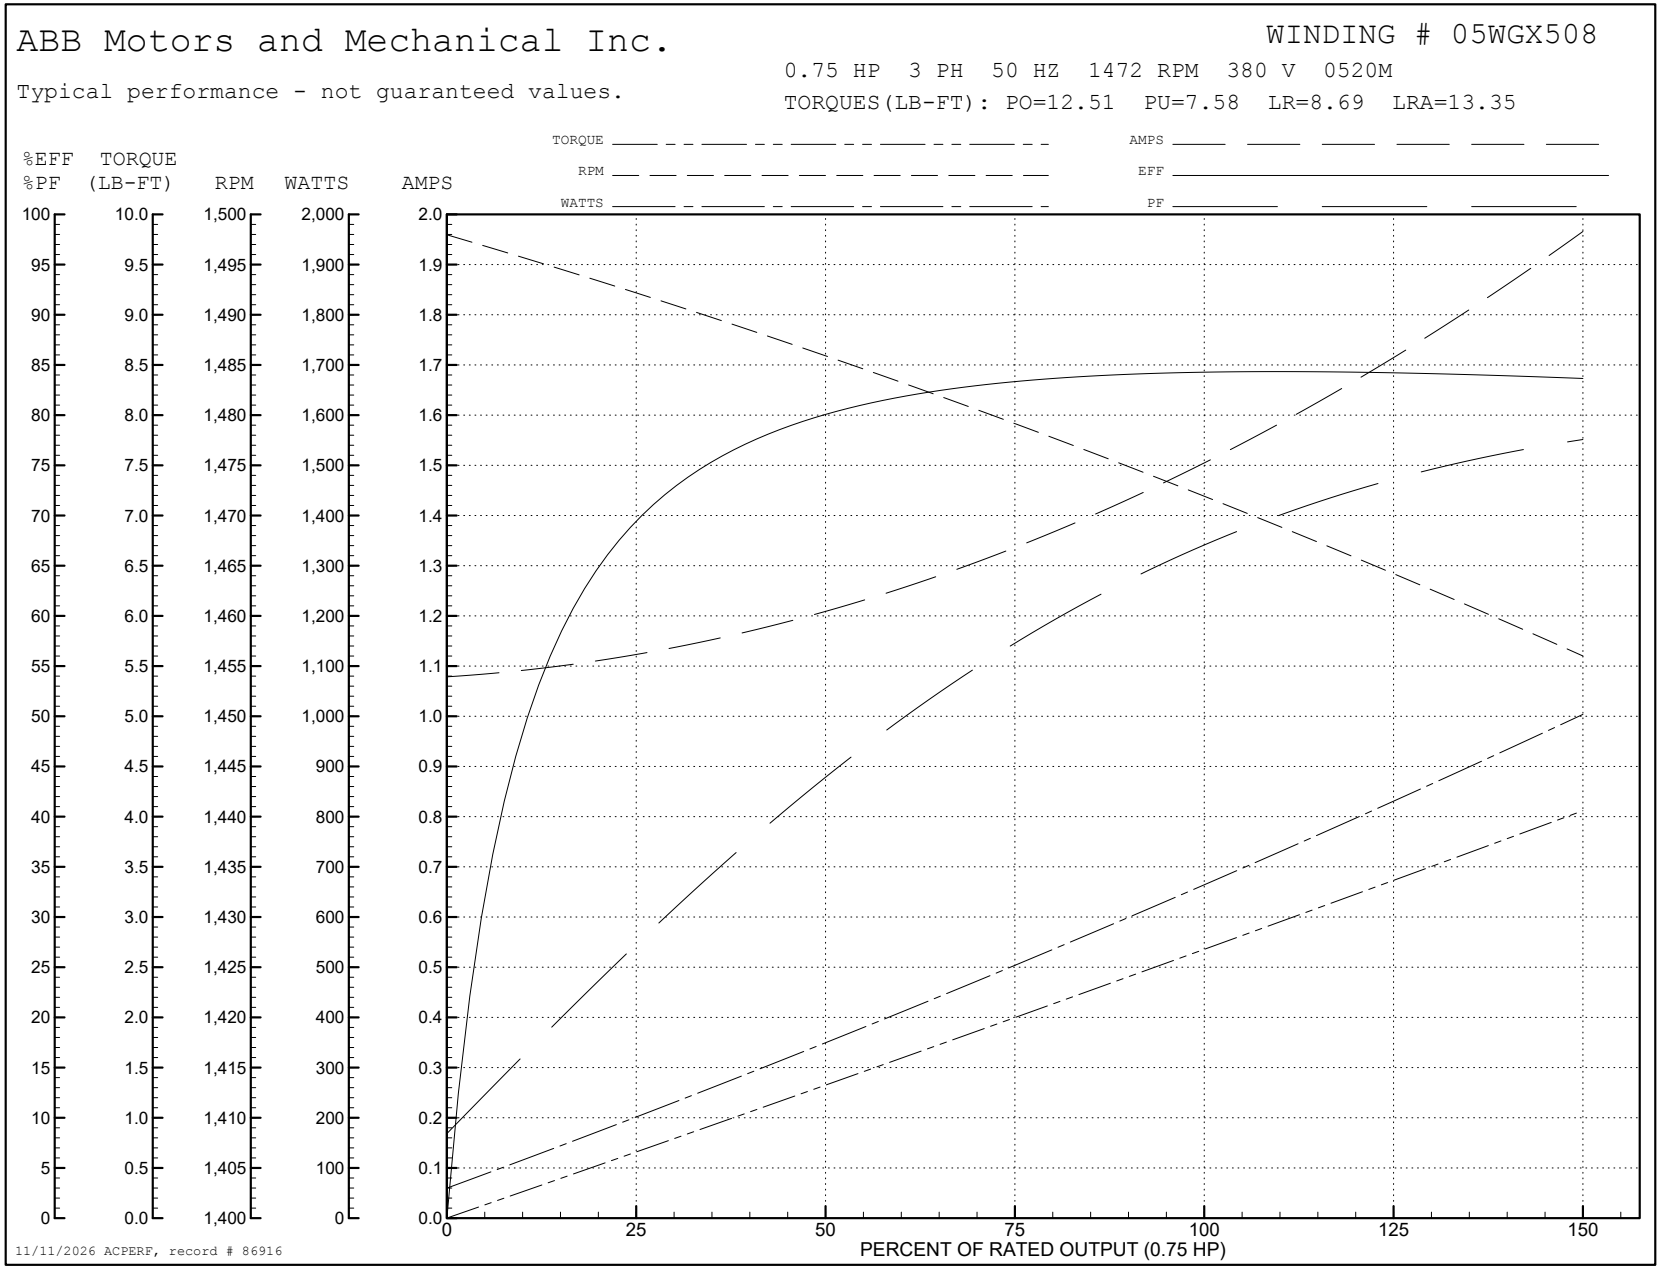
Winding: 05WGX508-R005	**Type:** 0520M	**Enclosure:** XPFC

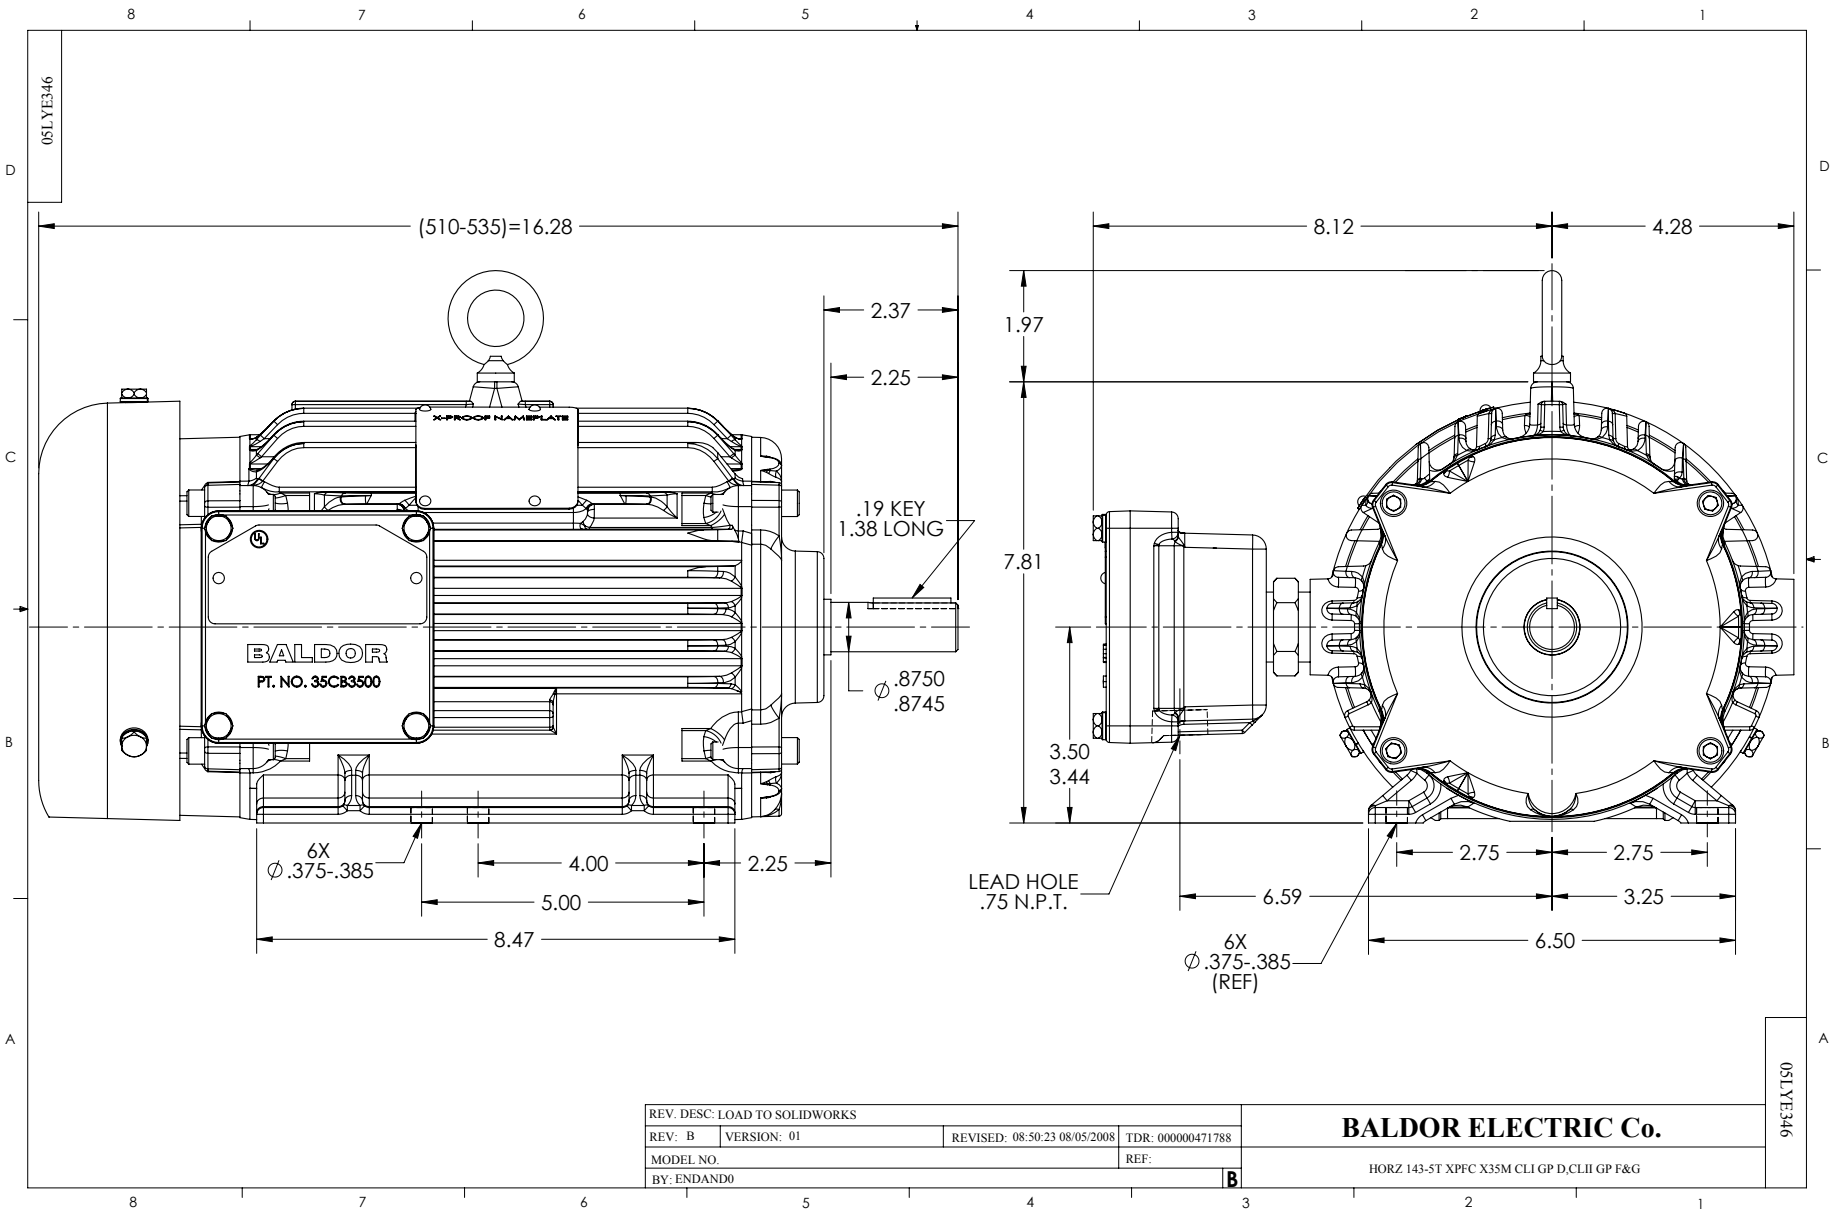
Nameplate Data			
Rated Output (HP)			1//.75
Volts			230/460//190/380
Full Load Amps			3.26/1.63//3.04/1.52
R.P.M.			1760//1470
Hz	60//50	**Phase**	3
NEMA Design Code	B	**KVA Code**	N
Service Factor (S.F.)			1
NEMA Nom. Eff.	85.5	**Power Factor**	67
Rating - Duty			40C AMB-CONT

380 V, 50 Hz: High Voltage Connection	
Full Load Torque	2.68 LB-FT
Start Configuration	direct on line
Breakdown Torque	12.51 LB-FT
Pull-up Torque	7.58 LB-FT
Locked-rotor Torque	8.69 LB-FT
Starting Current	13.35 A
No-load Current	1.09 A
Line-line Res. @ 25ºC	16.7 Ω
Temp. Rise @ Rated Load	22°C
Locked-rotor Power Factor	67.5
Rotor inertia	0.144 lb-ft²

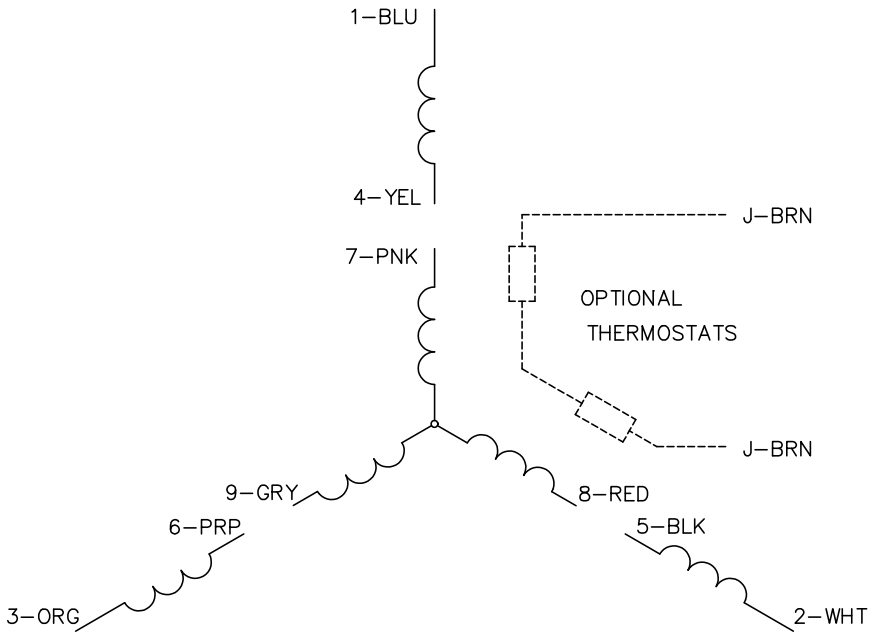
Load Characteristics 380 V, 50 Hz, 0.75 HP

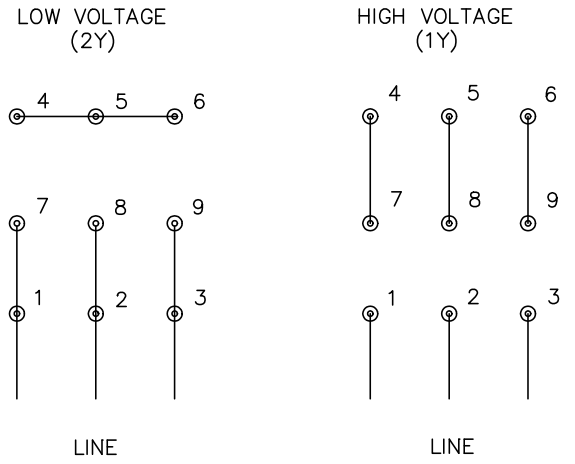
% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	28	44	57	66	74	78
Efficiency	69.5	79.9	83.2	84.4	84.3	83.5
Speed	1492	1486	1479	1472	1464	1456
Line amperes	1.11	1.2	1.34	1.52	1.72	1.96


ABB Motors and Mechanical Inc.
WINDING # 05WGX508
Typical performance - not guaranteed values.
0.75 HP 3 PH 50 HZ 1472 RPM 380 V 0520M
TORQUES(LB-FT): PO=12.51 PU=7.58 LR=8.69 LRA=13.35
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (0.75 HP)
11/11/2026 ACPERF, record # 86916


05LYE346
(510-535)=16.28
2.37
2.25
.19 KEY
1.38 LONG
.8750
.8745
X-PROOF NAMEPLATE
BALDOR
PT. NO. 35CB3500
6X
.375-.385
4.00
2.25
5.00
8.47
8.12
4.28
1.97
7.81
3.50
3.44
LEAD HOLE
.75 N.P.T.
6.59
2.75
2.75
3.25
6.50
6X
.375-.385
(REF)
REV. DESC: LOAD TO SOLIDWORKS
REV: B
VERSION: 01
REVISED: 08:50:23 08/05/2008
TDR: 000000471788
MODEL NO.
REF:
BY: ENDAND0
B
BALDOR ELECTRIC Co.
HORZ 143-5T XPFC X35M CLI GP D,CLII GP F&G
05LYE346

CD0005





NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS