

ABB BALDOR RELIANCE III

Customer information packet

EM7114T

1//.75HP, 1760//1460RPM, 3PH, 60//50HZ, 143T

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	143T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 50 HZ 1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.260 A @ 230.0 V 3.200 A @ 208.0 V 3.040 A @ 190.0 V 1.630 A @ 460.0 V 1.520 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part Detail

Revision	C
Type	AC
Mech. spec.	05E346
Base	
Status	PRD/A
Elec. spec.	05WGX508
Layout	05LYE346
Eff. date	04-08-2026
CD Diagram	CD0005
Poles	04
Leads	9#18 Y
Proprietary	False
Created date	01-10-2022

Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	N
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X0520M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	16.28 IN
Power Factor	67
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1470 rpm 1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line

Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1426XPSLEV									
NO.		CC	010A						
SER.									
SPEC.	05E346X508G1								
CAT.NO.									
HP	1//.75	T. CODE	T3C						
VOLTS	230/460//190/380								
AMPS	3.26/1.63//3.04/1.52								
RPM	1760//1470								
HZ	60//50	PH	3	CL	F				
SER.F.	1.00	DES	B	CODE	N				
RATING	40C AMB-CONT								
FRAME	143T	NEMA-NOM-EFF							85.5
		PF	67						
BLANK									

AC Induction Motor Performance Data

Record # 86915

Typical performance - not guaranteed values

Winding: 05WGX508-R005			Type: 0520M		Enclosure: XPFC			
Nameplate Data				460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		1//.75		Full Load Torque		2.98 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		3.26/1.63//3.04/1.52		Breakdown Torque		13.9 LB-FT		
R.P.M.		1760//1470		Pull-up Torque		8 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		9.18 LB-FT	
NEMA Design Code		B		KVA Code	N	Starting Current		14.4 A
Service Factor (S.F.)		1		No-load Current		1.11 A		
NEMA Nom. Eff.		85.5	Power Factor		67	Line-line Res. @ 25°C		16.7 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		24°C
						Locked-rotor Power Factor		61.9
						Rotor inertia		0.144 lb-ft²

Load Characteristics 460 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	29	46	59	68	75	79
Efficiency	71.3	81.3	84.7	85.6	85.4	84.7
Speed	1791	1784	1777	1769	1760	1751
Line amperes	1.14	1.25	1.41	1.61	1.84	2.11


ABB Motors and Mechanical Inc.

WINDING # 05WGX508

Typical performance - not guaranteed values.

1 HP 3 PH 60 HZ 1769 RPM 460 V 0520M

TORQUES (LB-FT): PO=13.9 PU=8 LR=9.18 LRA=14.4

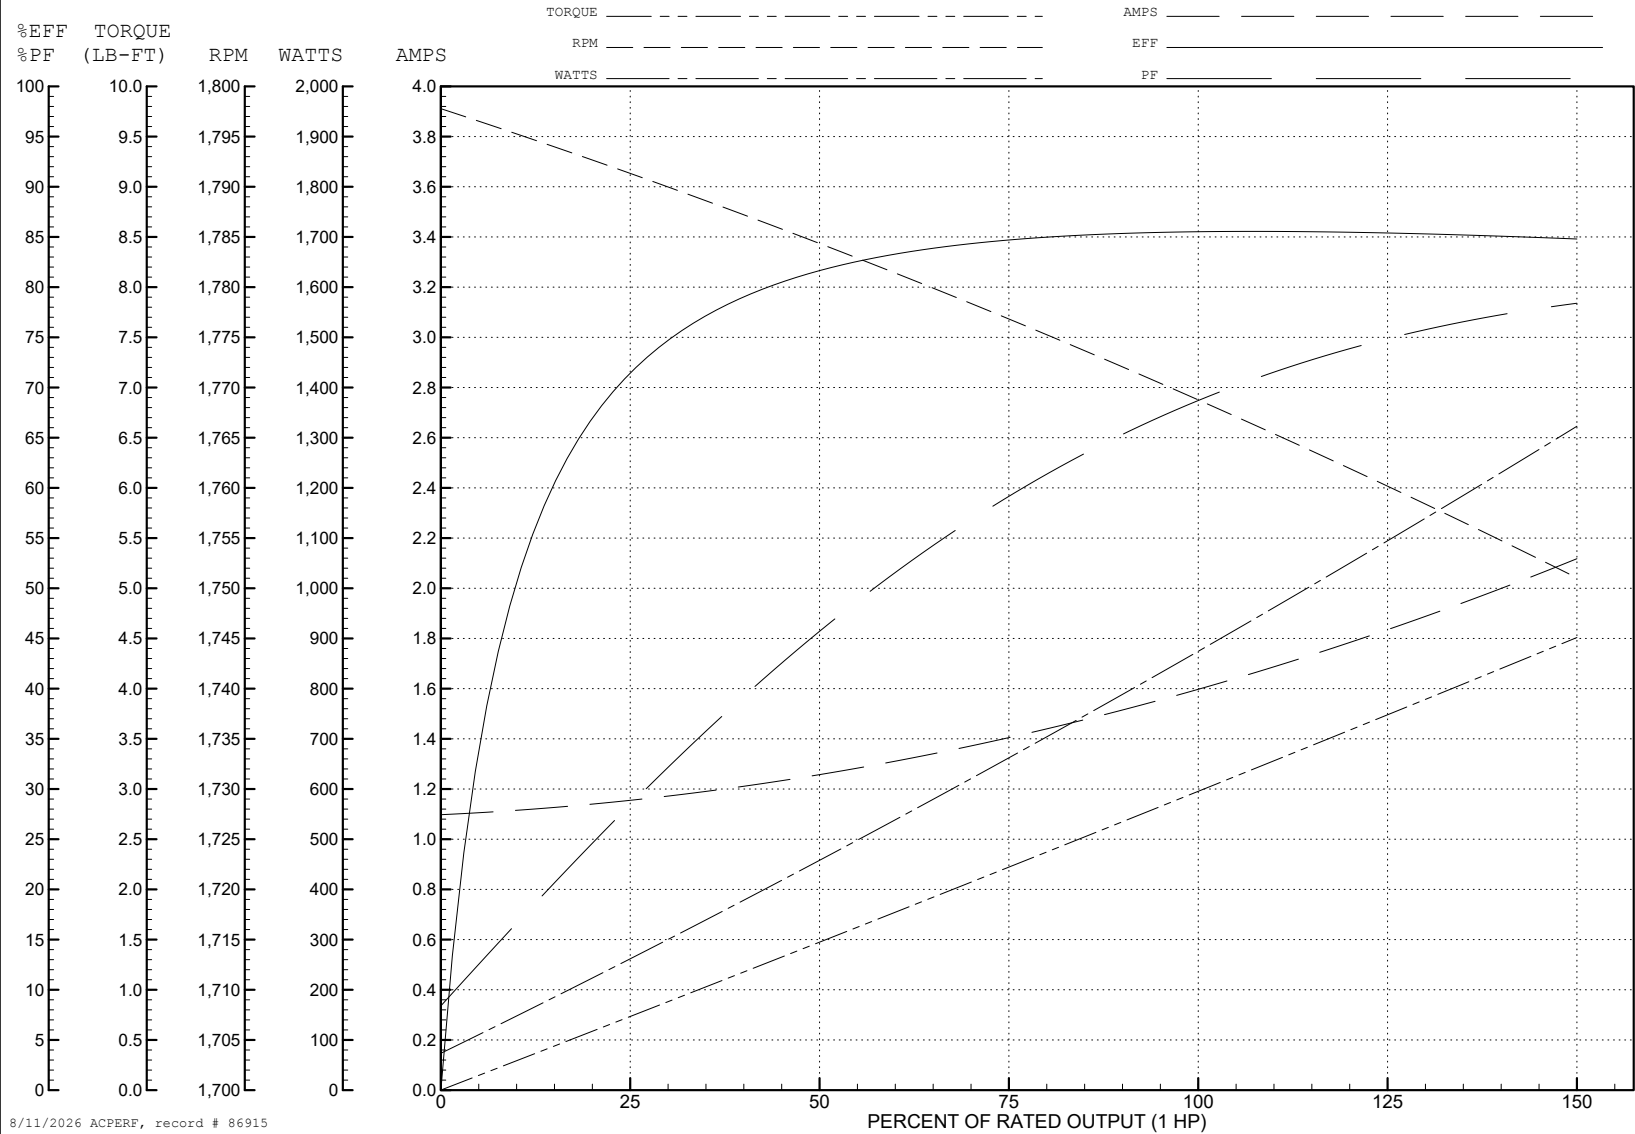

AC Induction Motor Performance Data

Record # 86916

Typical performance - not guaranteed values

Winding: 05WGX508-R005			Type: 0520M		Enclosure: XPFC			
Nameplate Data					380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)		1//.75		Full Load Torque		2.68 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		3.26/1.63//3.04/1.52		Breakdown Torque		12.51 LB-FT		
R.P.M.		1760//1470		Pull-up Torque		7.58 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		8.69 LB-FT	
NEMA Design Code		B		KVA Code	N	Starting Current		13.35 A
Service Factor (S.F.)		1		No-load Current		1.09 A		
NEMA Nom. Eff.		85.5	Power Factor		67	Line-line Res. @ 25°C		16.7 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		22°C
						Locked-rotor Power Factor		67.5
						Rotor inertia		0.144 lb-ft²

Load Characteristics 380 V, 50 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	28	44	57	66	74	78
Efficiency	69.5	79.9	83.2	84.4	84.3	83.5
Speed	1492	1486	1479	1472	1464	1456
Line amperes	1.11	1.2	1.34	1.52	1.72	1.96

ABB Motors and Mechanical Inc.

WINDING # 05WGX508

0.75 HP 3 PH 50 HZ 1472 RPM 380 V 0520M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=12.51 PU=7.58 LR=8.69 LRA=13.35

