

ABB BALDOR RELIANCE III

Customer information packet

EM7120T

1//1.5HP, 975//1170RPM, 3PH, 50//60HZ, 182T

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	182T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 50 HZ 1.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	UL CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.000 A @ 230.0 V 4.400 A @ 190.0 V 2.500 A @ 460.0 V 2.200 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	87.5 %

Part Detail

Revision	Q
Type	AC
Mech. spec.	06J001
Base	
Status	PRD/A
Elec. spec.	06WGW969
Layout	06LYJ001
Eff. date	03-05-2026
CD Diagram	CD0005
Poles	06
Leads	9#16
Proprietary	False
Created date	10-17-2011

Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	2.2 a
Insulation Class	B
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X0630M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	17.56 IN
Power Factor	65
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger

Speed	1170 rpm 975 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1426XPSL									
NO.		CC	010A						
SER.									
SPEC.	06J001W969G1								
CAT.NO.	EM7120T								
HP	1.5//1	T. CODE	T3C						
VOLTS	230/460//190/380								
AMPS	5/2.5//4.4/2.2								
RPM	1170//975								
HZ	60//50	PH	3	CL	B				
SER.F.	1.00	DES	B	CODE	K				
RATING	40C AMB-CONT								
FRAME	182T	NEMA-NOM-EFF							87.5
		PF	65						
BLANK									

AC Induction Motor Performance Data

Record # 50509

Typical performance - not guaranteed values

Winding: 06WGW969-R013			Type: 0630M		Enclosure: XPFC			
Nameplate Data					460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		1.5//1		Full Load Torque		6.77 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		5/2.5//4.4/2.2		Breakdown Torque		24 LB-FT		
R.P.M.		1170//975		Pull-up Torque		12.5 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		15.8 LB-FT	
NEMA Design Code		B		KVA Code	K	Starting Current		16.2 A
Service Factor (S.F.)		1		No-load Current		1.63 A		
NEMA Nom. Eff.		87.5	Power Factor		65	Line-line Res. @ 25°C		7.01 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		26°C
						Locked-rotor Power Factor		30.4
						Rotor inertia		0.282 LB-FT2

Load Characteristics 460 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	27	44	56	64	69	73
Efficiency	76.3	84.8	86.9	87.6	87.1	85.9
Speed	1194	1187	1179	1172	1163	1153
Line amperes	1.7	1.9	2.18	2.51	2.92	3.38


ABB Motors and Mechanical Inc.

WINDING # 06WGW969

Typical performance - not guaranteed values.

1.5 HP 3 PH 60 HZ 1172 RPM 460 V 0630M

TORQUES (LB-FT): PO=24 PU=12.5 LR=15.8 LRA=16.2

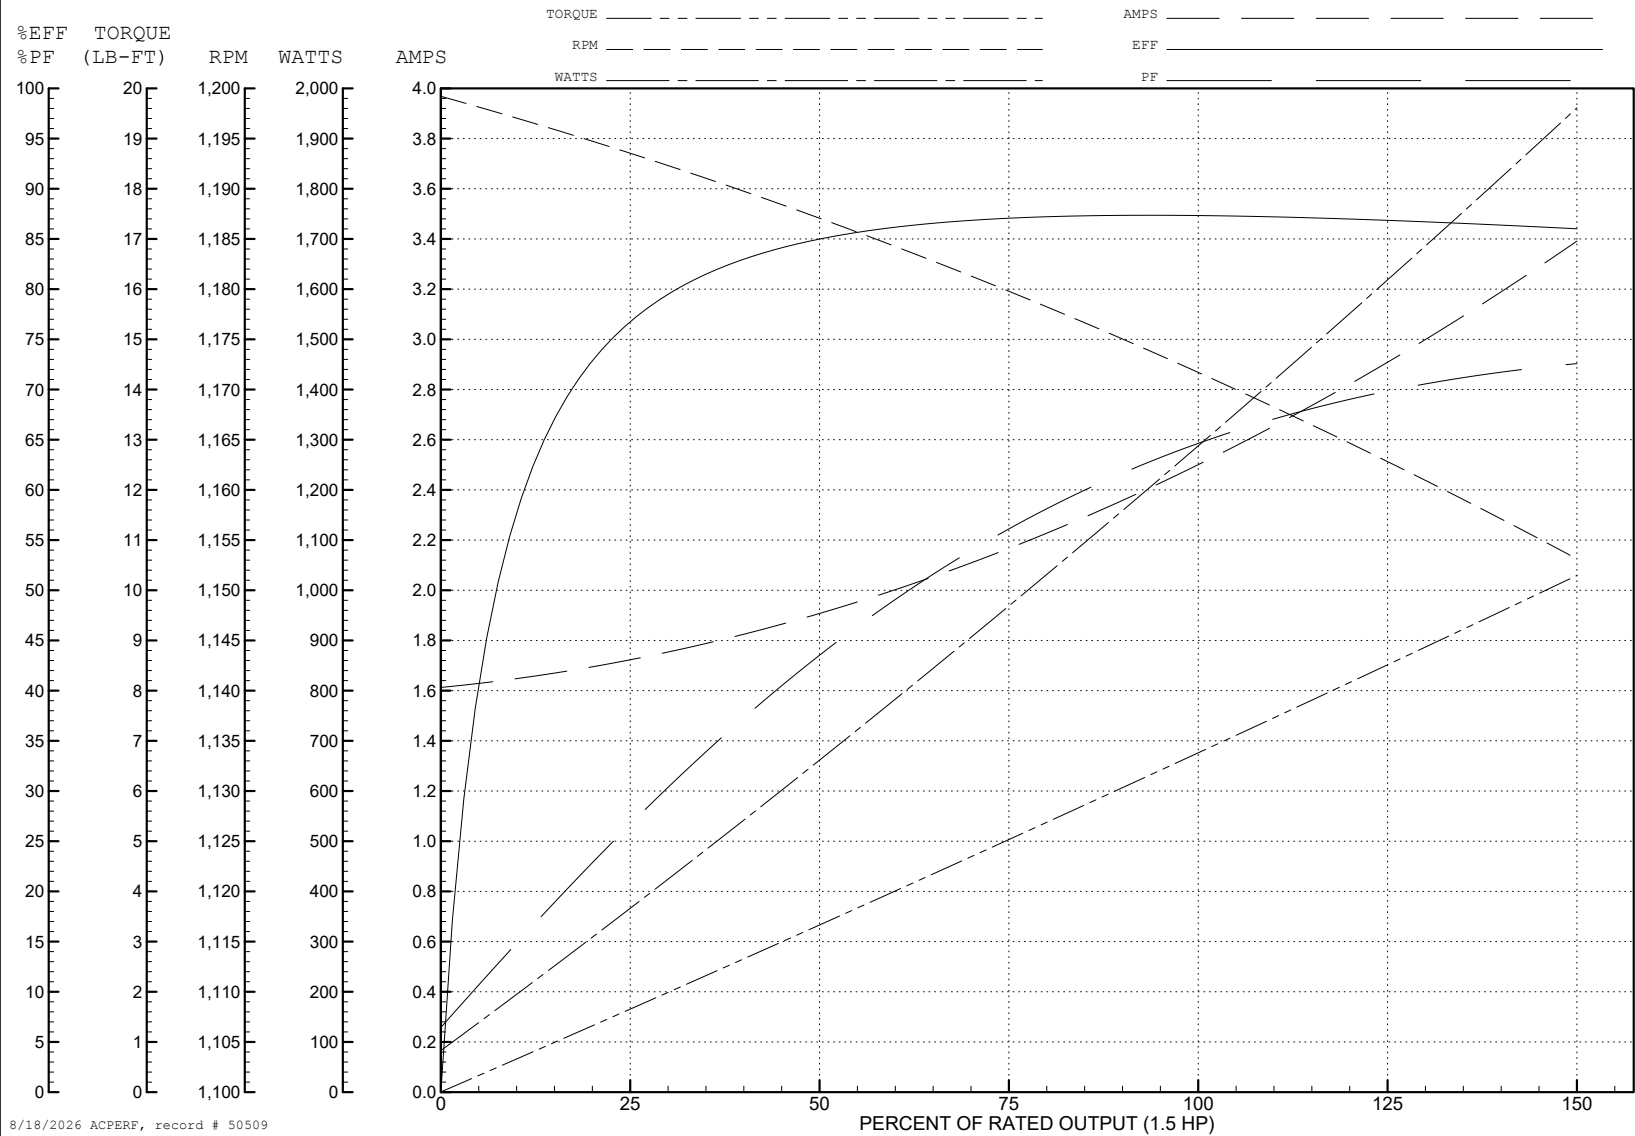

AC Induction Motor Performance Data

Record # 50510

Typical performance - not guaranteed values

Winding: 06GWG969-R013			Type: 0630M		Enclosure: XPFC			
Nameplate Data				380 V, 50 Hz: High Voltage Connection				
Rated Output (HP)		1.5//1		Full Load Torque		5.41 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		5/2.5//4.4/2.2		Breakdown Torque		23 LB-FT		
R.P.M.		1170//975		Pull-up Torque		13.1 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		16.6 LB-FT	
NEMA Design Code		B		KVA Code	K	Starting Current		15.8 A
Service Factor (S.F.)		1		No-load Current		1.61 A		
NEMA Nom. Eff.		87.5	Power Factor		65	Line-line Res. @ 25°C		7.01 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		21°C		
				Locked-rotor Power Factor		34.4		
				Rotor inertia		0.282 LB-FT2		

Load Characteristics 380 V, 50 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	24	39	50	60	66	70
Efficiency	72.6	82.4	85.3	86.5	86.4	85.5
Speed	995	989	983	977	970	963
Line amperes	1.65	1.79	1.99	2.21	2.51	2.84


ABB Motors and Mechanical Inc.


WINDING # 06WGW969

Typical performance - not guaranteed values.

1 HP 3 PH 50 HZ 977 RPM 380 V 0630M

TORQUES (LB-FT): PO=23 PU=13.1 LR=16.6 LRA=15.8

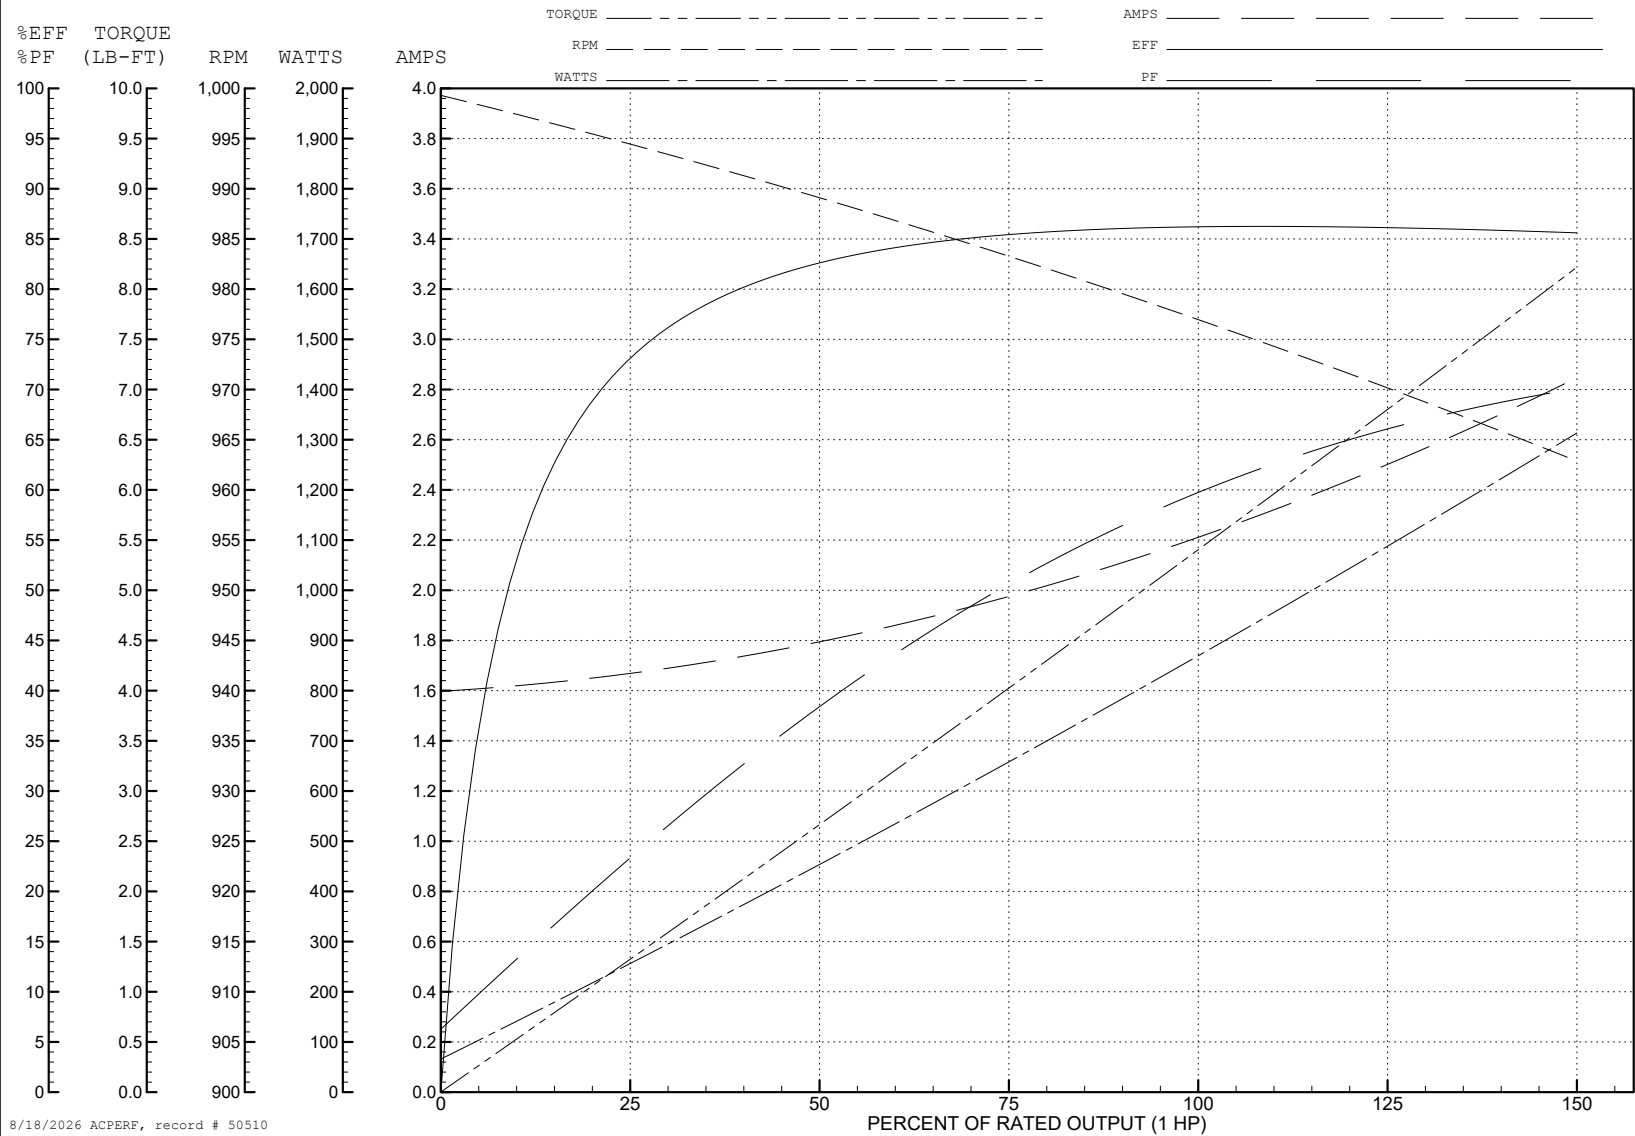

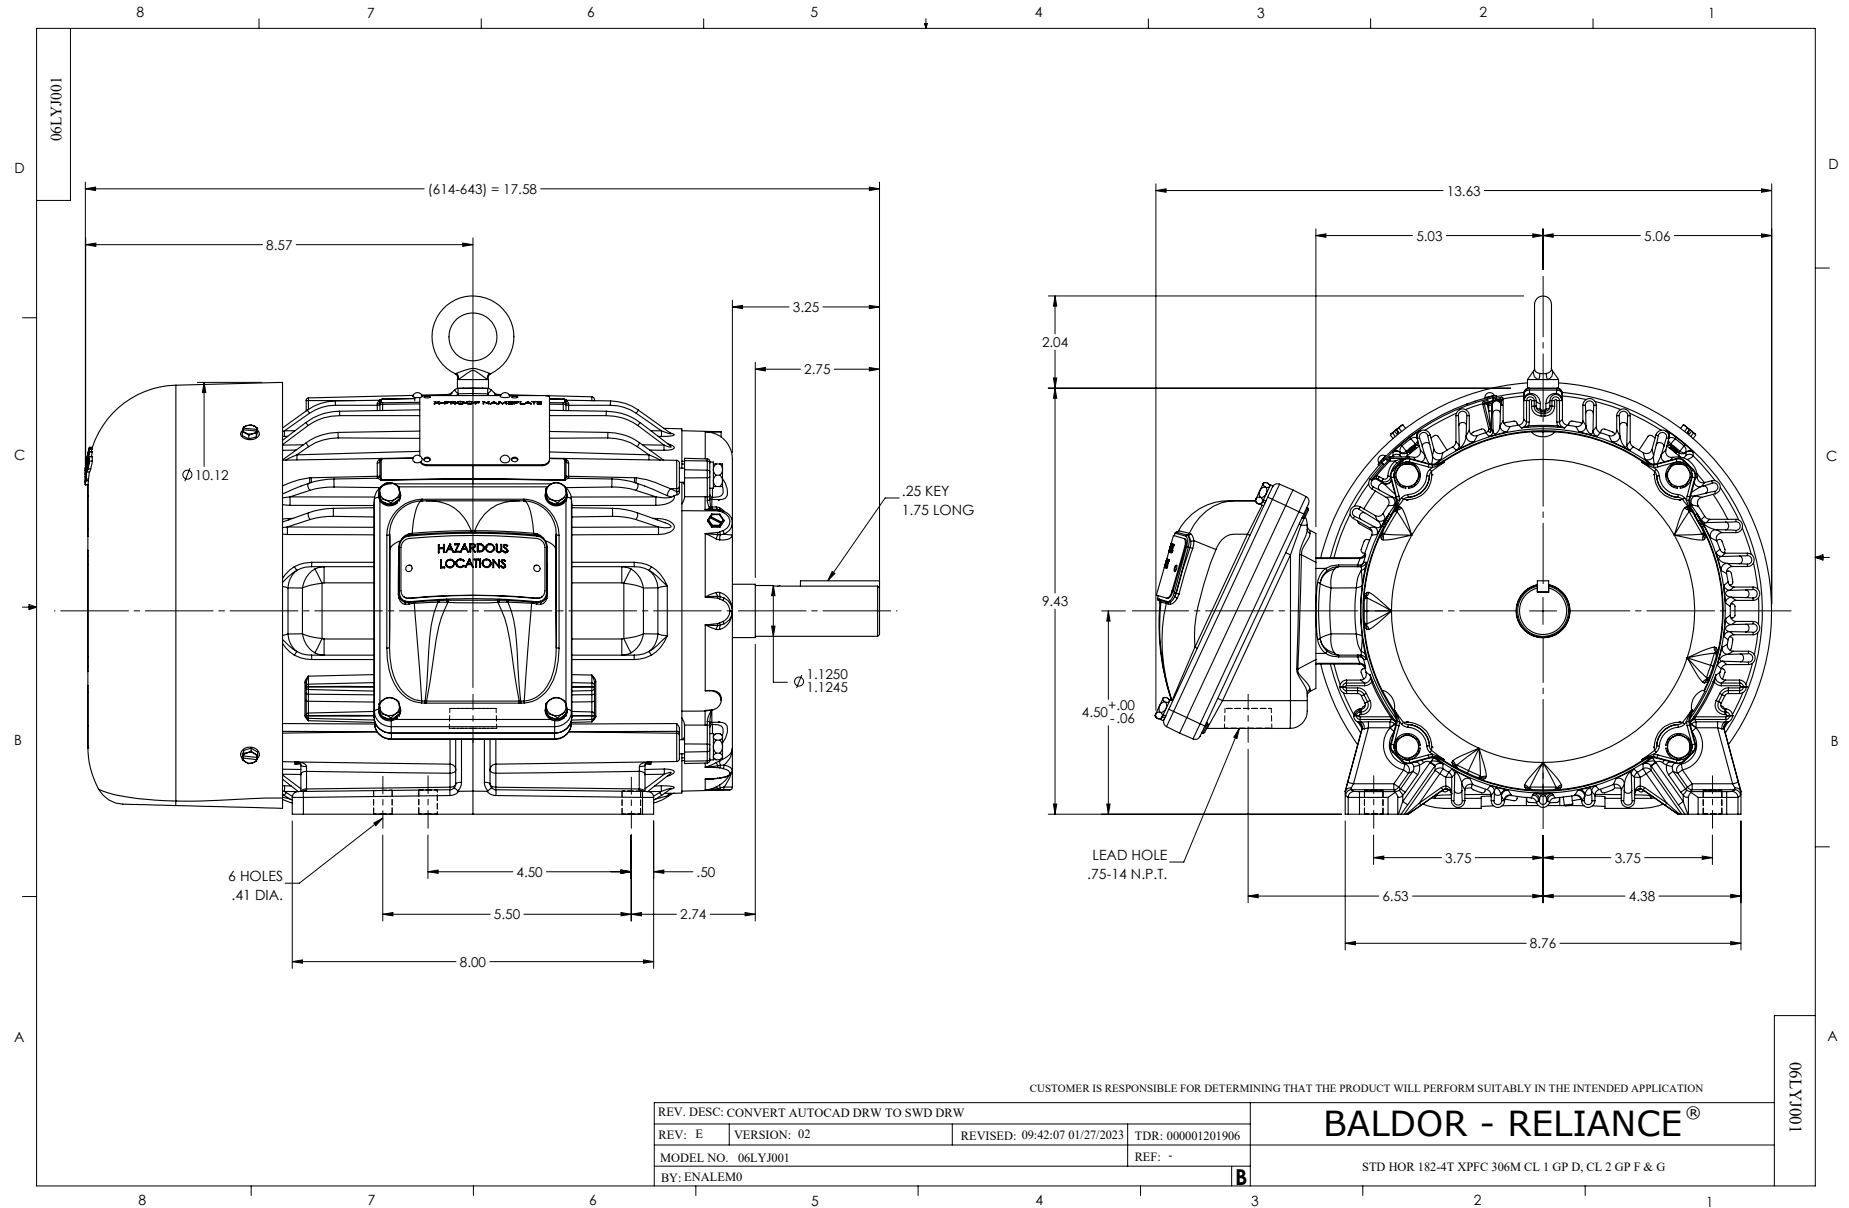

CD0005



- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005