

ABB BALDOR RELIANCE III

Customer information packet

EM7145T

7.5//5HP, 3510//2925RPM, 3PH, 60//50HZ, 213T

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	213T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 50 HZ 7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV CSA UL UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	7.600 A @ 380.0 V 9.000 A @ 460.0 V 18.000 A @ 230.0 V 15.200 A @ 190.0 V
Design Code	B
Drip Cover	No Drip Cover

Part Detail

Revision	Q
Type	AC
Mech. spec.	07H271
Base	
Status	PRD/A
Elec. spec.	07WGY328
Layout	07LYH271
Eff. date	02-15-2024
CD Diagram	CD0005
Poles	02
Leads	9#14
Proprietary	False
Created date	09-27-2012

Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	7.6 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X0726M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	19.90 IN
Power Factor	86
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible

Shaft Slinger Indicator	No Slinger
Speed	2925 rpm
	3510 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1426XPSLEV									
NO.		CC	010A						
SER.									
SPEC.	07H271Y328G1								
CAT.NO.	EM7145T								
HP	7.5//5	T. CODE	T3C						
VOLTS	230/460//190/380								
AMPS	18/9//15.2/7.6								
RPM	3510//2925								
HZ	60//50	PH	3	CL	B				
SER.F.	1.00	DES	B	CODE	H				
RATING	40C AMB-CONT								
FRAME	213T	NEMA-NOM-EFF	89.5						
		PF	86						
BLANK									

AC Induction Motor Performance Data

Record # 39945

Typical performance - not guaranteed values

Winding: 07WGY328-R004				Type: 0726M		Enclosure: XPFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		7.5//5		Full Load Torque		11.2 LB-FT	
Volts		230/460//190/380		Start Configuration		direct on line	
Full Load Amps		18/9//15.2/7.6		Breakdown Torque		38.8 LB-FT	
R.P.M.		3510//2925		Pull-up Torque		20.4 LB-FT	
Hz		60//50		Phase		3	
NEMA Design Code		B		KVA Code		H	
Service Factor (S.F.)		1		No-load Current		3.54 A	
NEMA Nom. Eff.		89.5		Power Factor		86	
Rating - Duty		40C		AMB-CONT			
				Temp. Rise @ Rated Load		44°C	
				Locked-rotor Power Factor		34	
				Rotor inertia		0.237 LB-FT2	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	52	74	82	87	90	89
Efficiency	83.8	89.4	90.5	90.4	89.7	88.5
Speed	3580.9	3559.3	3536.6	3512.4	3485.6	3455.8
Line amperes	4.04	5.31	7.04	8.9	10.9	13.3


ABB Motors and Mechanical Inc.

WINDING # 07WGY328

Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 3512.4 RPM 460 V 0726M

TORQUES (LB-FT): PO=38.8 PU=20.4 LR=23.5 LRA=61.1

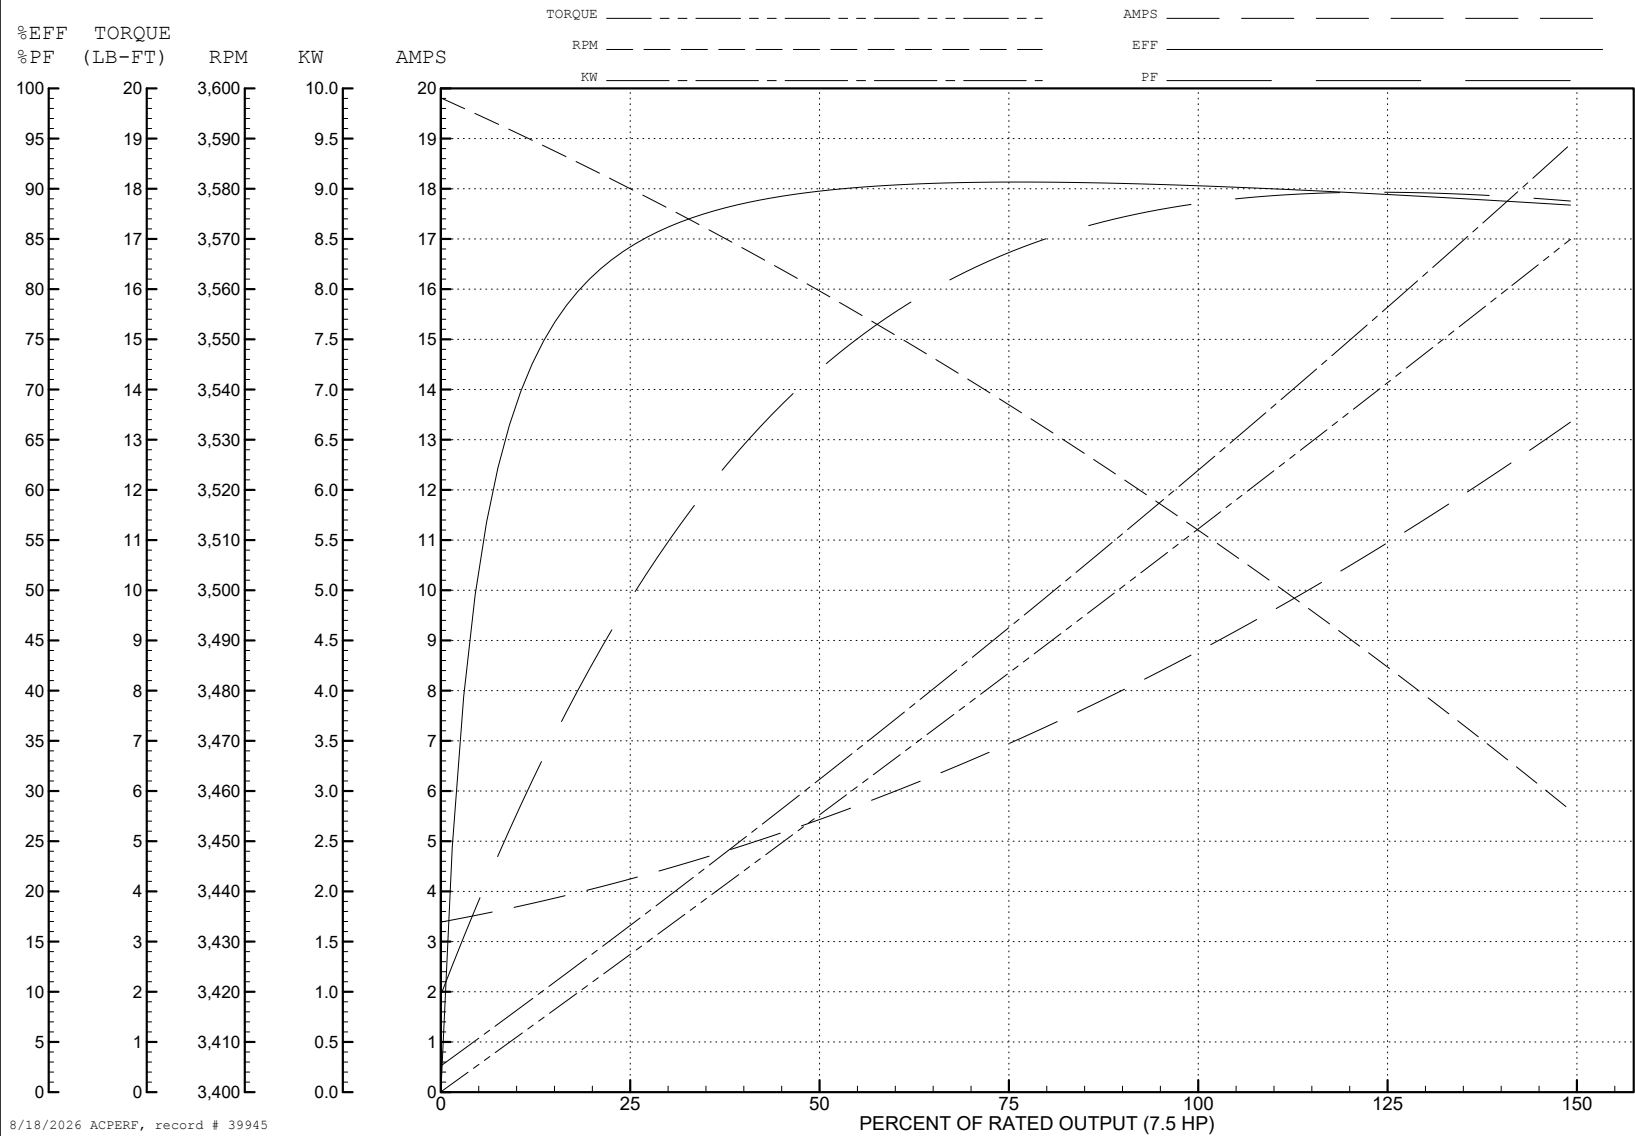

AC Induction Motor Performance Data

Record # 39946

Typical performance - not guaranteed values

Winding: 07WGY328-R004			Type: 0726M		Enclosure: XPFC		
Nameplate Data				380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)		7.5//5		Full Load Torque		8.94 LB-FT	
Volts		230/460//190/380		Start Configuration		direct on line	
Full Load Amps		18/9//15.2/7.6		Breakdown Torque		37 LB-FT	
R.P.M.		3510//2925		Pull-up Torque		21.5 LB-FT	
Hz	60//50	Phase	3	Locked-rotor Torque		24.8 LB-FT	
NEMA Design Code		B	KVA Code	H	Starting Current		59.2 A
Service Factor (S.F.)		1		No-load Current		3.43 A	
NEMA Nom. Eff.		89.5	Power Factor	86	Line-line Res. @ 25°C		1.19 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		34°C	
				Locked-rotor Power Factor		38	
				Rotor inertia		0.237 LB-FT2	

Load Characteristics 380 V, 50 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	47	68	78	84	88	88
Efficiency	79.9	86.9	88.7	89.4	88.8	87.7
Speed	2984	2966	2948	2928	2907	2883
Line amperes	3.8	4.78	6.12	7.55	9.1	11

ABB Motors and Mechanical Inc.

WINDING # 07WGY328

Typical performance - not guaranteed values.

5 HP 3 PH 50 HZ 2928 RPM 380 V 0726M

TORQUES (LB-FT): PO=37 PU=21.5 LR=24.8 LRA=59.2

