

# ABB BALDOR RELIANCE III

---

## Customer information packet

### EPCL1322M

2HP, 1760RPM, 1PH, 60HZ, 56C, 3546LC, OPEN, F1

Class - None

Division - Not Applicable

**Specifications**

|                                       |                                                              |
|---------------------------------------|--------------------------------------------------------------|
| <b>Enclosure</b>                      | OPEN                                                         |
| <b>Frame</b>                          | 56C                                                          |
| <b>Frame Material</b>                 | Steel                                                        |
| <b>Frequency</b>                      | 60.00 Hz                                                     |
| <b>Haz Area Class and Group</b>       | None                                                         |
| <b>Haz Area Division</b>              | Not Applicable                                               |
| <b>Motor Letter Type</b>              | Cap Start, Cap Run                                           |
| <b>Output @ Frequency</b>             | 2.000 HP @ 60 HZ                                             |
| <b>Phase</b>                          | 1                                                            |
| <b>Synchronous Speed @ Frequency</b>  | 1800 RPM @ 60 HZ                                             |
| <b>Voltage @ Frequency</b>            | 115.0 V @ 60 HZ<br>230.0 V @ 60 HZ                           |
| <b>Agency Approvals</b>               | CURUSEEV                                                     |
| <b>Ambient Temperature</b>            | 40 °C                                                        |
| <b>Auxiliary Box</b>                  | NO AUXILLARY BOX                                             |
| <b>Auxiliary Box Lead Termination</b> | None                                                         |
| <b>Base Indicator</b>                 | Rigid                                                        |
| <b>Bearing Grease Type</b>            | Polyrex EM (-20F +300F)                                      |
| <b>Blower</b>                         | None                                                         |
| <b>Current @ Voltage</b>              | 16.400 A @ 115.0 V<br>8.200 A @ 230.0 V<br>9.200 A @ 208.0 V |
| <b>Design Code</b>                    | L                                                            |
| <b>Drip Cover</b>                     | No Drip Cover                                                |
| <b>Duty Rating</b>                    | CONT                                                         |
| <b>Efficiency @ 100% Load</b>         | 84.5 %                                                       |
| <b>Electrically Isolated Bearing</b>  | Not Electrically Isolated                                    |
| <b>Feedback Device</b>                | NO FEEDBACK                                                  |
| <b>Front Shaft Indicator</b>          | None                                                         |
| <b>Heater Indicator</b>               | No Heater                                                    |
| <b>High Voltage Full Load Amps</b>    | 8.2 a                                                        |
| <b>Insulation Class</b>               | F                                                            |

**Part Detail**

|                     |                |
|---------------------|----------------|
| <b>Revision</b>     | C              |
| <b>Type</b>         | AC             |
| <b>Mech. spec.</b>  | 35K267         |
| <b>Base</b>         |                |
| <b>Status</b>       | PRD/A          |
| <b>Elec. spec.</b>  | 35WGG890       |
| <b>Layout</b>       | 35LYK267       |
| <b>Eff. date</b>    | 08-22-2025     |
| <b>CD Diagram</b>   | CD0881         |
| <b>Poles</b>        | 04             |
| <b>Leads</b>        | 6#16,1#14 #4TH |
| <b>Proprietary</b>  | False          |
| <b>Created date</b> | 02-24-2025     |

|                                      |                         |
|--------------------------------------|-------------------------|
| <b>Inverter Code</b>                 | Not Inverter            |
| <b>KVA Code</b>                      | K                       |
| <b>Lifting Lugs</b>                  | No Lifting Lugs         |
| <b>Locked Bearing Indicator</b>      | Locked Bearing          |
| <b>Motor Lead Quantity/Wire Size</b> | 6 @ 16 AWG              |
| <b>Motor Lead Termination</b>        | Flying Leads            |
| <b>Motor Standards</b>               | NEMA                    |
| <b>Motor Type</b>                    | 3546LC                  |
| <b>Mounting Arrangement</b>          | F1                      |
| <b>Number of Poles</b>               | 4                       |
| <b>Overall Length</b>                | 14.32 IN                |
| <b>Power Factor</b>                  | 92                      |
| <b>Product Family</b>                | General Purpose         |
| <b>Pulley End Bearing Type</b>       | Ball                    |
| <b>Pulley Face Code</b>              | C-Face                  |
| <b>Pulley Shaft Indicator</b>        | Standard                |
| <b>Rodent Screen</b>                 | None                    |
| <b>Service Factor</b>                | 1.15                    |
| <b>Shaft Diameter</b>                | 0.625 IN                |
| <b>Shaft Ground Indicator</b>        | No Shaft Grounding      |
| <b>Shaft Rotation</b>                | Reversible              |
| <b>Shaft Slinger Indicator</b>       | No Slinger              |
| <b>Speed</b>                         | 1760 rpm                |
| <b>Speed Code</b>                    | Single Speed            |
| <b>Starting Method</b>               | Direct on line          |
| <b>Thermal Device - Bearing</b>      | None                    |
| <b>Thermal Device - Winding</b>      | Do Not Use              |
| <b>Vibration Sensor Indicator</b>    | No Vibration Sensor     |
| <b>Winding Thermal 1</b>             | Manual Thermal Overload |
| <b>Winding Thermal 1 Location</b>    | KO                      |
| <b>Winding Thermal 2</b>             | None                    |

**Nameplate**

| NP3432L        |              |      |     |      |   |    |   |    |   |  |  |
|----------------|--------------|------|-----|------|---|----|---|----|---|--|--|
| CAT.NO.        | EPCL1322M    |      |     |      |   |    |   |    |   |  |  |
| SPEC.          | 35K267G890G1 |      |     |      |   |    |   |    |   |  |  |
| HP             | 2            |      |     |      |   |    |   |    |   |  |  |
| VOLTS          | 115/230      |      |     |      |   |    |   |    |   |  |  |
| AMP            | 16.4/8.2     |      |     |      |   |    |   |    |   |  |  |
| RPM            | 1760         |      |     |      |   |    |   |    |   |  |  |
| FRAME          | 56C          |      | HZ  | 60   |   |    |   | PH | 1 |  |  |
| SER.F.         | 1.15         | CODE | K   | DES  | L | CL | F |    |   |  |  |
| F.L. AVG. EFF. | 84.5         | PF   | 92  |      |   |    |   |    |   |  |  |
| RATING         | 40C AMB-CONT |      |     |      |   |    |   |    |   |  |  |
| CC             |              |      |     |      |   |    |   |    |   |  |  |
| DE             | 6205         |      | ODE | 6203 |   |    |   |    |   |  |  |
| ENCL           | OPEN         | SN   |     |      |   |    |   |    |   |  |  |

**AC Induction Motor Performance Data**

Record # 112162

Typical performance - not guaranteed values

| Winding: 35WGG890-R002 |  |                   |  | Type: 3546LC                            |  | Enclosure: OPEN                 |  |
|------------------------|--|-------------------|--|-----------------------------------------|--|---------------------------------|--|
| Nameplate Data         |  |                   |  | 115 V, 60 Hz:<br>Low Voltage Connection |  |                                 |  |
| Rated Output (HP)      |  | 2                 |  | Full Load Torque                        |  | 5.988 LB-FT                     |  |
| Volts                  |  | 115/230           |  | Start Configuration                     |  | direct on line                  |  |
| Full Load Amps         |  | 16.4/8.2          |  | Breakdown Torque                        |  | 19.1 LB-FT                      |  |
| R.P.M.                 |  | 1775              |  | Pull-up Torque                          |  | 11.3 LB-FT                      |  |
| Hz                     |  | 60 Phase          |  | Locked-rotor Torque                     |  | 16.9 LB-FT                      |  |
| NEMA Design Code       |  | L KVA Code        |  | Starting Current                        |  | 145 A                           |  |
| Service Factor (S.F.)  |  | 1.15              |  | No-load Current                         |  | 4.95 A                          |  |
| NEMA Nom. Eff.         |  | 84.5 Power Factor |  | Line-line Res. @ 25°C                   |  | 0.33795 Ω A Ph<br>1.5355 Ω B Ph |  |
| Rating - Duty          |  | 40C AMB-CONT      |  | Temp. Rise @ Rated Load                 |  | 58°C                            |  |
| S.F. Amps              |  |                   |  | Temp. Rise @ S.F. Load                  |  | 71°C                            |  |

**Load Characteristics 115 V, 60 Hz, 2 HP**

| % of Rated Load | 25   | 50   | 75   | 100  | 125  | 150  | S.F. |
|-----------------|------|------|------|------|------|------|------|
| Power Factor    | 73   | 86   | 91   | 94   | 95   | 95   | 95   |
| Efficiency      | 72   | 81.8 | 84.7 | 84.8 | 83.3 | 80.7 | 83.9 |
| Speed           | 1790 | 1782 | 1772 | 1761 | 1749 | 1734 | 1754 |
| Line amperes    | 6.36 | 9.3  | 12.6 | 16.4 | 20.6 | 25.5 | 18.9 |


ABB Motors and Mechanical Inc.

WINDING # 35WGG890


Typical performance - not guaranteed values.

2 HP 1 PH 60 HZ 1775 RPM 115 V 3546LC


TORQUES (LB-FT): PO=19.1 PU=11.3 LR=16.9 LRA=145

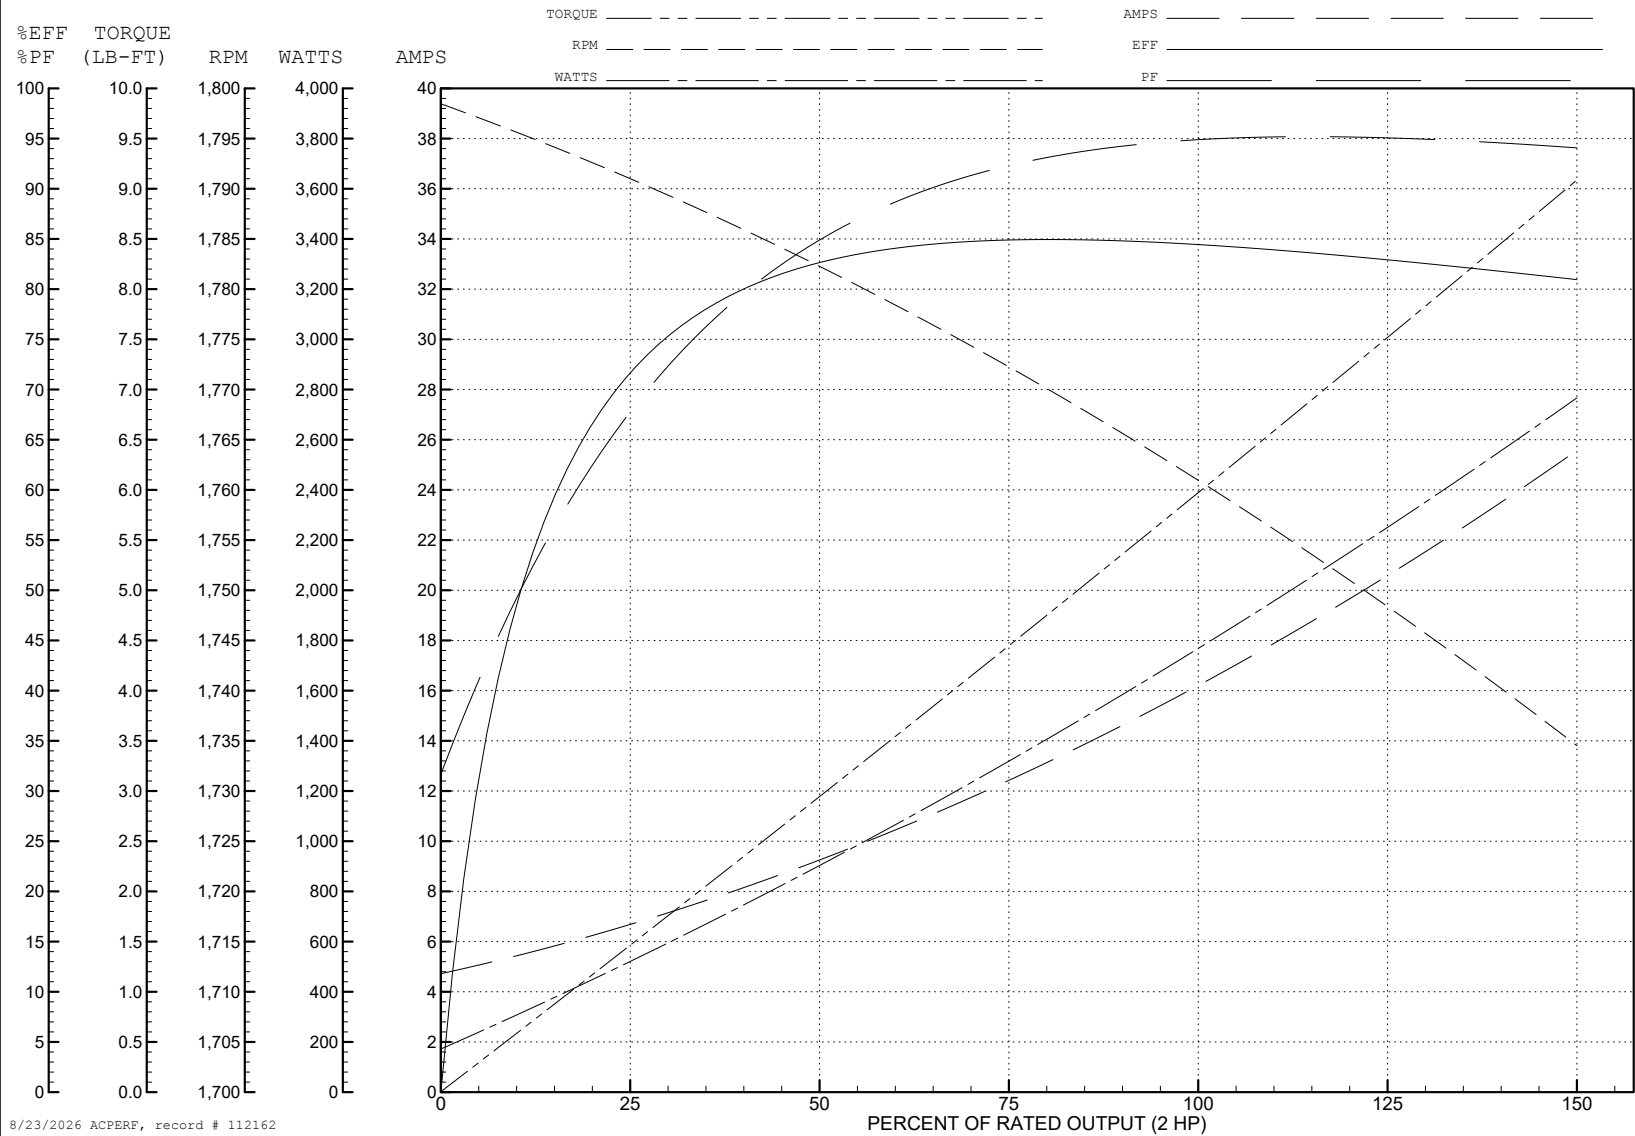

8/23/2026 ACPERF, record # 112162

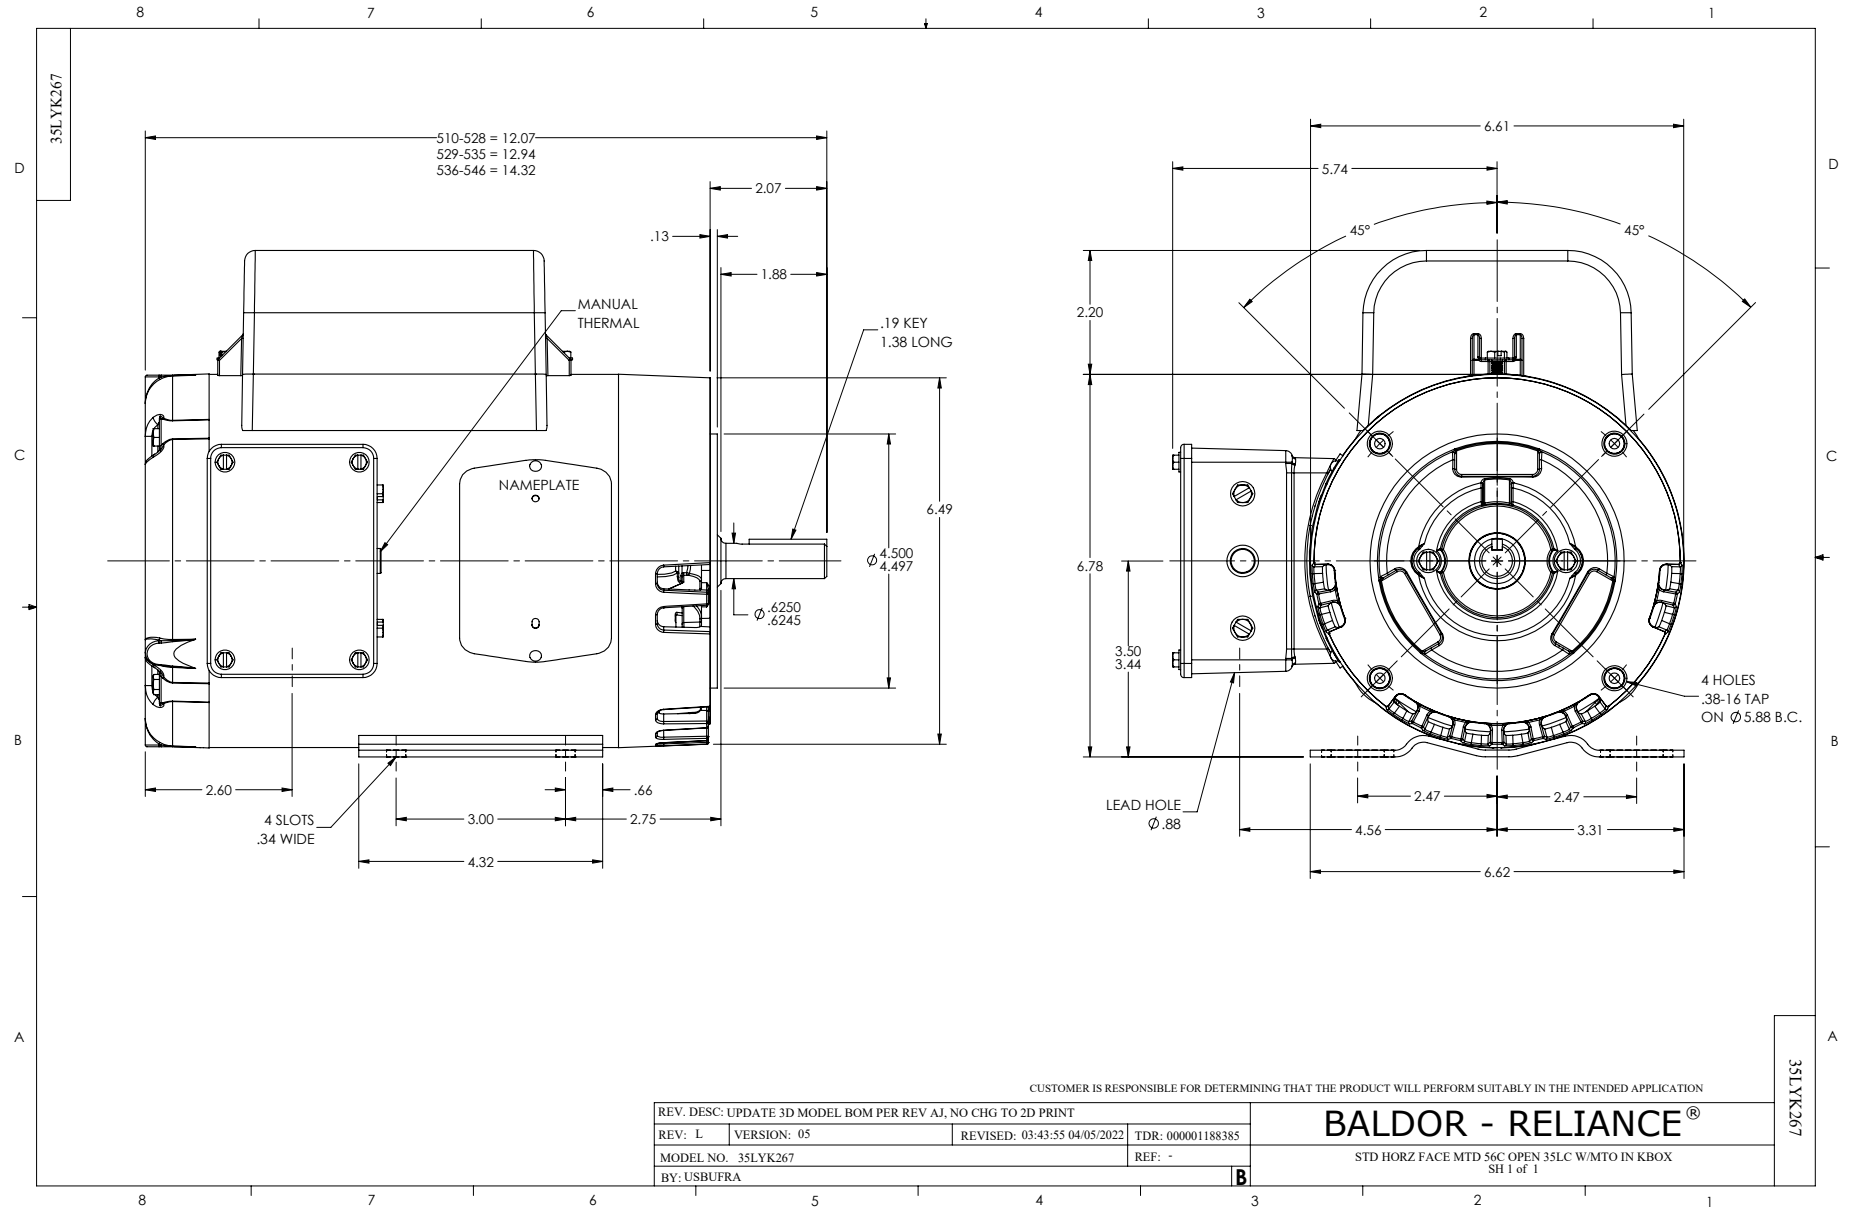

CD0881

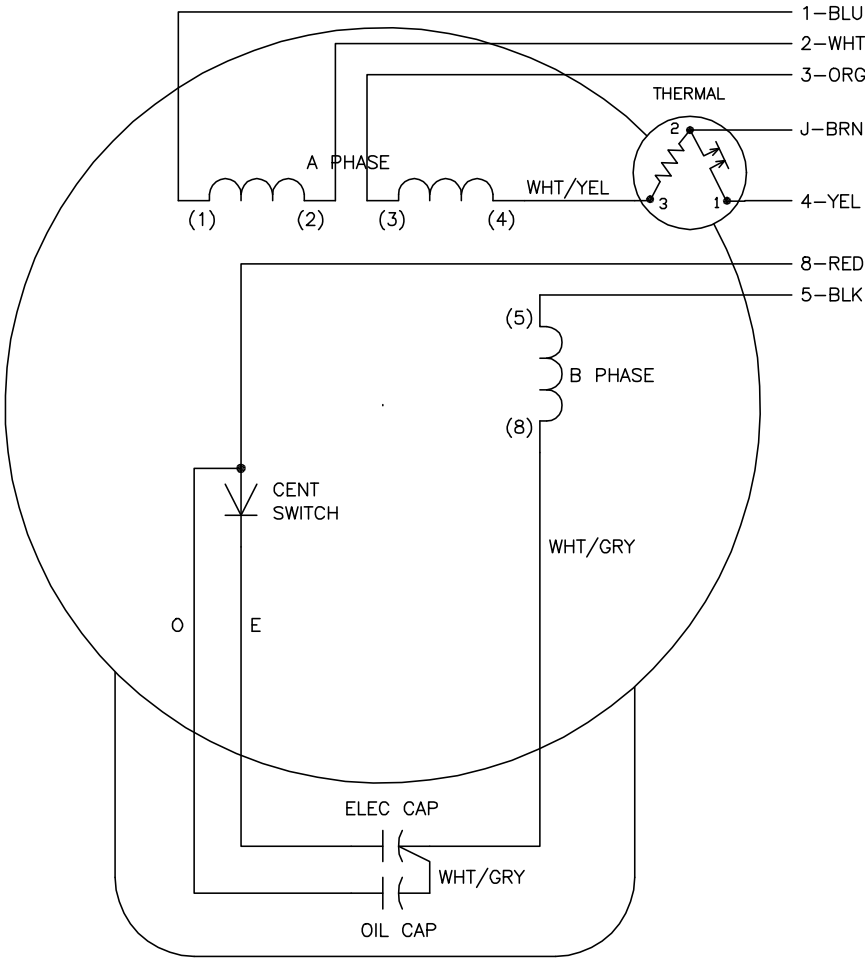

|          | LINE A | LINE B | JOIN  | JOIN  |
|----------|--------|--------|-------|-------|
| HIGH STD | 1      | 4      | 2,3,8 | J,5   |
| HIGH OPP | 1      | 4      | 2,3,5 | J,8   |
| LOW STD  | 1,3,8  | 4      | —     | 2,J,5 |
| LOW OPP  | 1,3,5  | 4      | —     | 2,J,8 |

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
  2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
  3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

|                                               |                      |                              |
|-----------------------------------------------|----------------------|------------------------------|
| REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION |                      |                              |
| REV. LTR: C                                   | VERSION: 01          | TDR: 000000373051            |
| CD0881                                        | FILE: \AAA\00007\429 | REVISED: 11:52:48 09/09/2005 |
|                                               | MTL: —               | BY: ENJOEPO                  |

BALDOR ELECTRIC Co.

TYPE LC, DV, REV, THERMAL, 7 LEAD

CD0881