

# ABB BALDOR RELIANCE III

---

## Customer information packet

### ERHM3162TA

5HP, 3450RPM, 3PH, 60HZ, 145TY, 3540M, OPEN, F1

Class - None

Division - Not Applicable

**Specifications**

<b>Enclosure</b>	OPEN
<b>Frame</b>	145TY
<b>Frame Material</b>	Steel
<b>Frequency</b>	60.00 Hz
<b>Haz Area Class and Group</b>	None
<b>Haz Area Division</b>	Not Applicable
<b>Motor Letter Type</b>	Three Phase
<b>Output @ Frequency</b>	5.000 HP @ 60 HZ
<b>Phase</b>	3
<b>Synchronous Speed @ Frequency</b>	3600 RPM @ 60 HZ
<b>Voltage @ Frequency</b>	230.0 V @ 60 HZ 460.0 V @ 60 HZ
<b>Agency Approvals</b>	UR CSA CSA EEV
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	Resilient
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	None
<b>Current @ Voltage</b>	6.100 A @ 460.0 V 13.000 A @ 208.0 V 12.200 A @ 230.0 V
<b>Design Code</b>	A
<b>Drip Cover</b>	No Drip Cover
<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	86.5 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	NO FEEDBACK
<b>Front Face Code</b>	Terminal Panel
<b>Front Shaft Indicator</b>	None

**Part Detail**

<b>Revision</b>	Q
<b>Type</b>	AC
<b>Mech. spec.</b>	35J829
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	35WGM541
<b>Layout</b>	35LYJ829
<b>Eff. date</b>	07-25-2024
<b>CD Diagram</b>	CD0007
<b>Poles</b>	02
<b>Leads</b>	12#18
<b>Proprietary</b>	False
<b>Created date</b>	08-05-2010

<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	6.1 a
<b>Insulation Class</b>	F
<b>Inverter Code</b>	Not Inverter
<b>KVA Code</b>	L
<b>Lifting Lugs</b>	No Lifting Lugs
<b>Locked Bearing Indicator</b>	No Locked Bearing
<b>Motor Lead Exit</b>	Terminal Panel
<b>Motor Lead Quantity/Wire Size</b>	12 @ 18 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3540M
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	2
<b>Overall Length</b>	15.02 IN
<b>Power Factor</b>	89
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	Resilient Mount
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>RoHS Status</b>	ROHS COMPLIANT
<b>Service Factor</b>	1.15
<b>Shaft Diameter</b>	0.875 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	3450 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	Do Not Use Eve-Not Valiid
<b>Vibration Sensor Indicator</b>	No Vibration Sensor

<b>Winding Thermal 1</b>	<b>Automatic Thermal Overload</b>
<b>Winding Thermal 1 Location</b>	<b>SB</b>
<b>Winding Thermal 2</b>	<b>None</b>

**Nameplate**

<b>NP2601L</b>									
<b>CAT.NO.</b>	ERHM3162TA								
<b>SPEC.</b>	35J829M541G1								
<b>HP</b>	5								
<b>VOLTS</b>	230/460								
<b>AMP</b>	12.2/6.1								
<b>RPM</b>	3450								
<b>FRAME</b>	143TY		<b>HZ</b>	60			<b>PH</b>	3	
<b>SER.F.</b>	1.15	<b>CODE</b>	L	<b>DES</b>	A	<b>CL</b>	F		
<b>NEMA-NOM-EFF</b>	86.5	<b>PF</b>	89						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>	010A								
<b>DE</b>	6205	<b>ODE</b>	6203						
<b>ENCL</b>	OPEN	<b>SN</b>							


ABB Motors and Mechanical Inc.

WINDING # 35WGM541

5 HP 3 PH 60 HZ 3450 RPM 460 V 3540M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=34.5 PU=20.8 LR=32.1 LRA=60.4

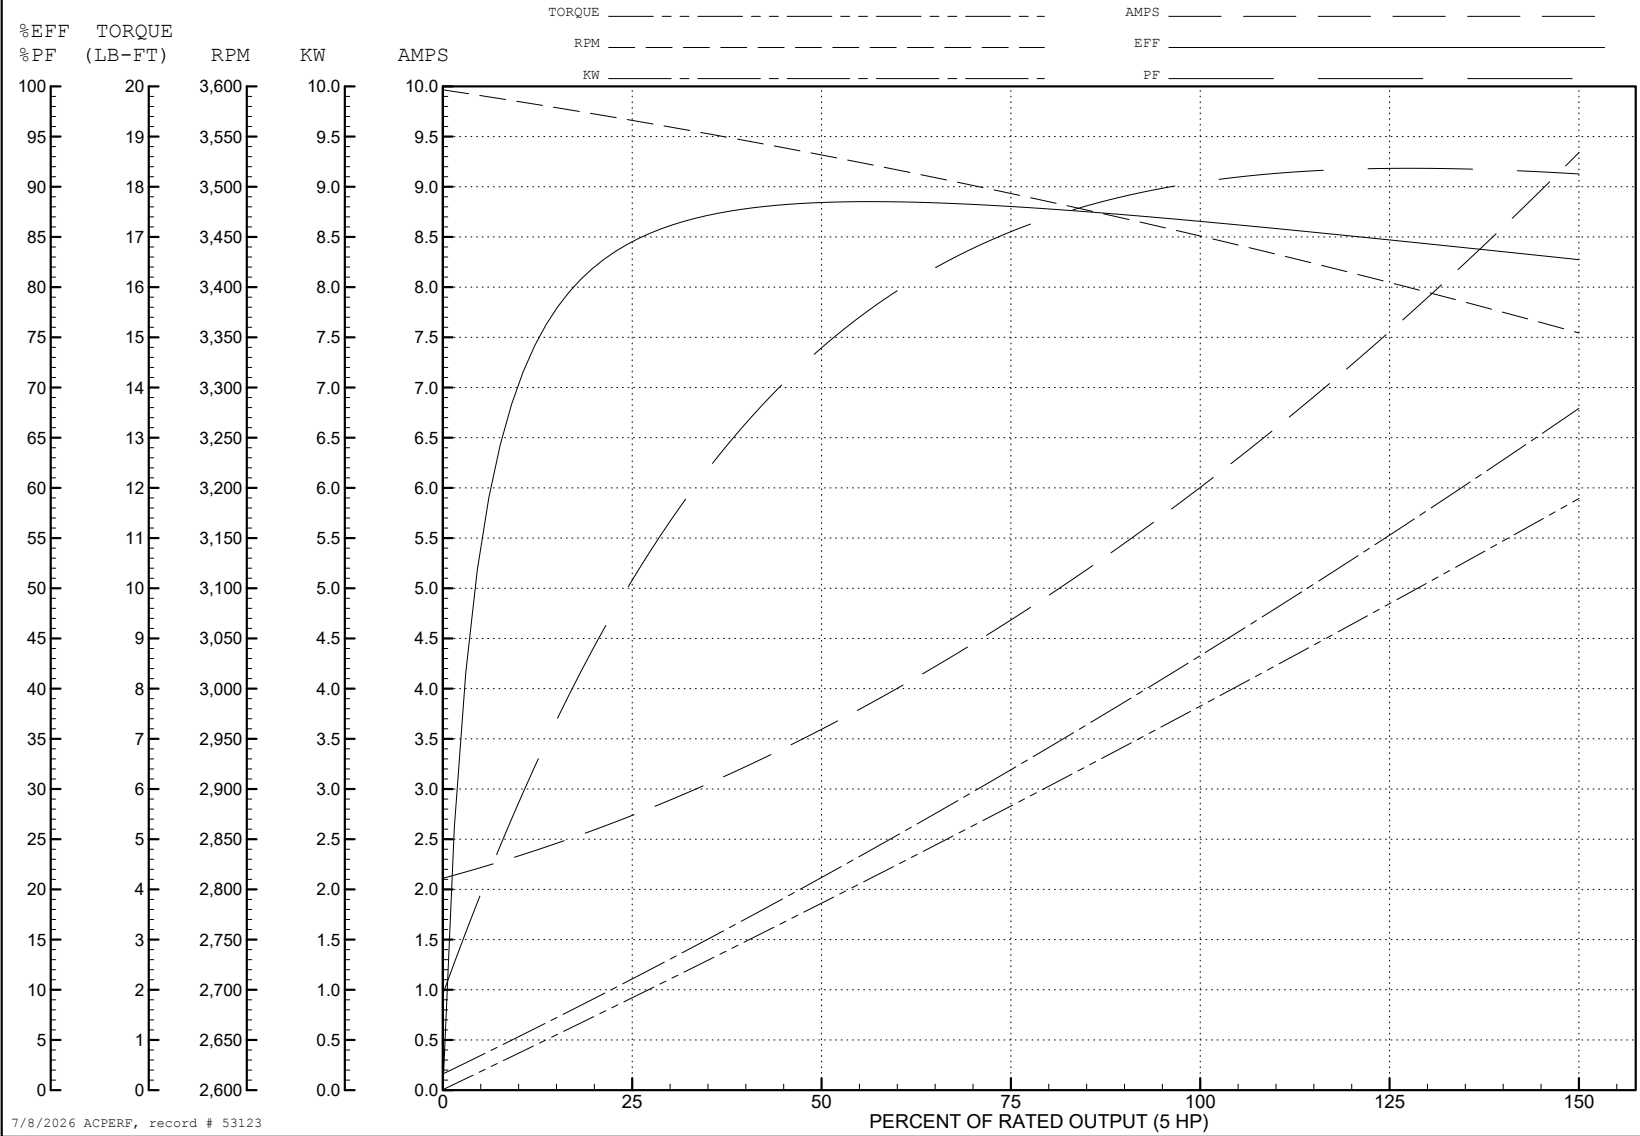

7/8/2026 ACPERF, record # 53123