ABB BALDOR RELIANCE

Customer information packet

ERM3111

.75HP, 3450RPM, 3PH, 60HZ, 56, 3416M, OPEN, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/13/2026 11:24:08 AM

Specifications

Enclosure	OPEN
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Resilient
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.700 A @ 208.0 V
	2.400 A @ 230.0 V
	1.200 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	76.8 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Resilient Mount
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	G
Type	AC
Mech. spec.	34K019
Base	
Status	PRD/A
Elec. spec.	34WGW719
Layout	34LYK019
Eff. date	10-28-2024
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	09-30-2014

High Voltage Full Load Amps	1.2 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Terminal Panel
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3416M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	10.97 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Resilient Mount
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	ERM3111								
SPEC.	34K019W719G2								
HP	.75								
VOLTS	230/460								
AMP	2.4/1.2								
RPM	3450								
FRAME	56		**HZ**	60			**PH**	3	
SER.F.	1.25	**CODE**	L	**DES**	B	**CLASS**		B	
NEMA-NOM-EFF	76.8	**PF**	80						
RATING	40C AMB-CONT								
CC									
DE	6203		**ODE**	6203					
ENCL	OPEN	**SN**							
	SFA 2.8/1.4								


AC Induction Motor Performance Data
Record # 47456
Typical performance - not guaranteed values


Winding: 34WGW719-R010	**Type:** 3416M	**Enclosure:** OPEN

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			.75	**Full Load Torque**	1.15 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			2.4/1.2	**Breakdown Torque**	5.62 LB-FT
R.P.M.			3450	**Pull-up Torque**	3.98 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	5.14 LB-FT
NEMA Design Code	B	**KVA Code**	L	**Starting Current**	9.2 A
Service Factor (S.F.)			1.25	**No-load Current**	0.611 A
NEMA Nom. Eff.	76.8	**Power Factor**	80	**Line-line Res. @ 25ºC**	20.283 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	17°C
S.F. Amps			2.8/1.4	**Temp. Rise @ S.F. Load**	21°C
				Locked-rotor Power Factor	69
				Rotor inertia	0.0148 LB-FT2


Load Characteristics 460 V, 60 Hz, 0.75 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	45	64	75	82	87	89	87
Efficiency	60.9	73.6	77.6	78.8	78.8	77.7	78.8
Speed	3558.7	3525.3	3490.1	3452.4	3410.2	3364.3	3410
Line amperes	0.661	0.769	0.92	1.1	1.3	1.54	1.3

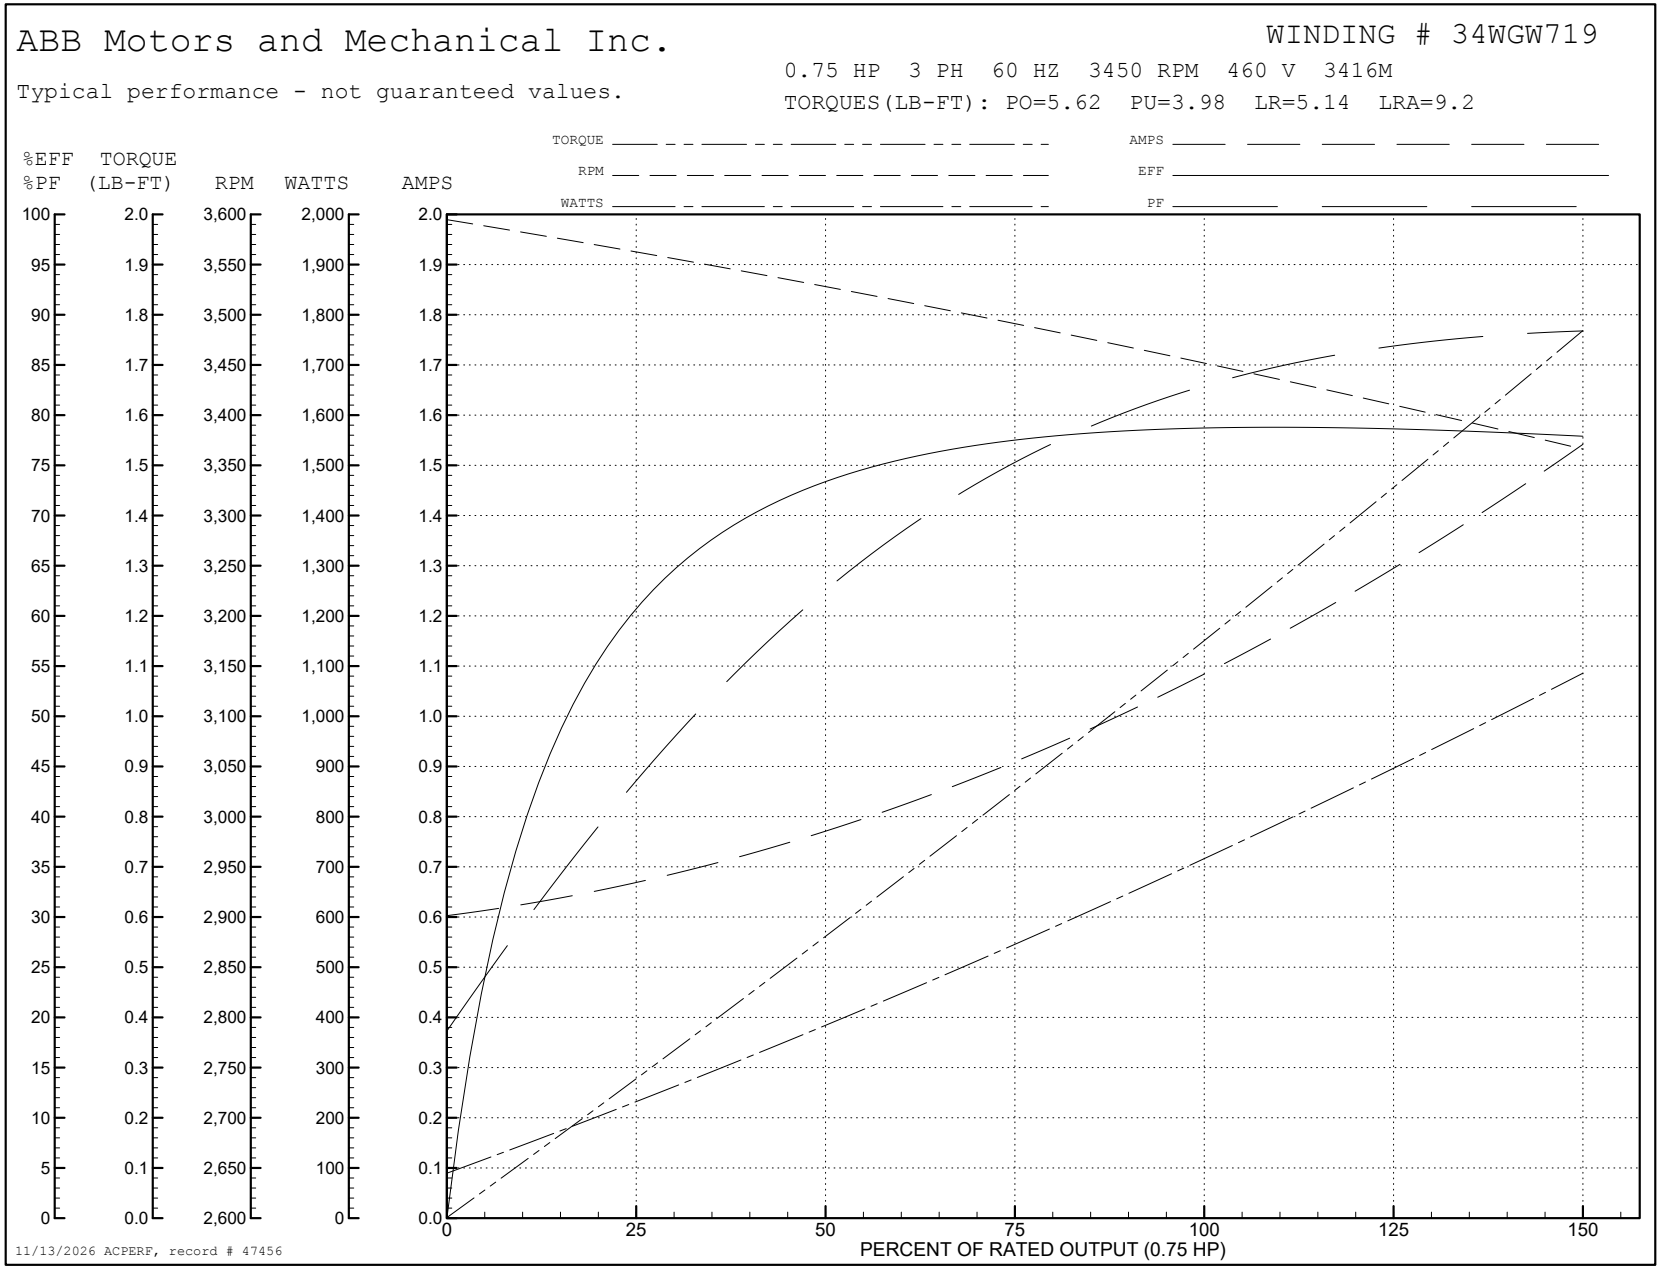
ABB Motors and Mechanical Inc.
WINDING # 34WGW719
Typical performance - not guaranteed values.
0.75 HP 3 PH 60 HZ 3450 RPM 460 V 3416M
TORQUES(LB-FT): PO=5.62 PU=3.98 LR=5.14 LRA=9.2
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (0.75 HP)
11/13/2026 ACPERF, record # 47456

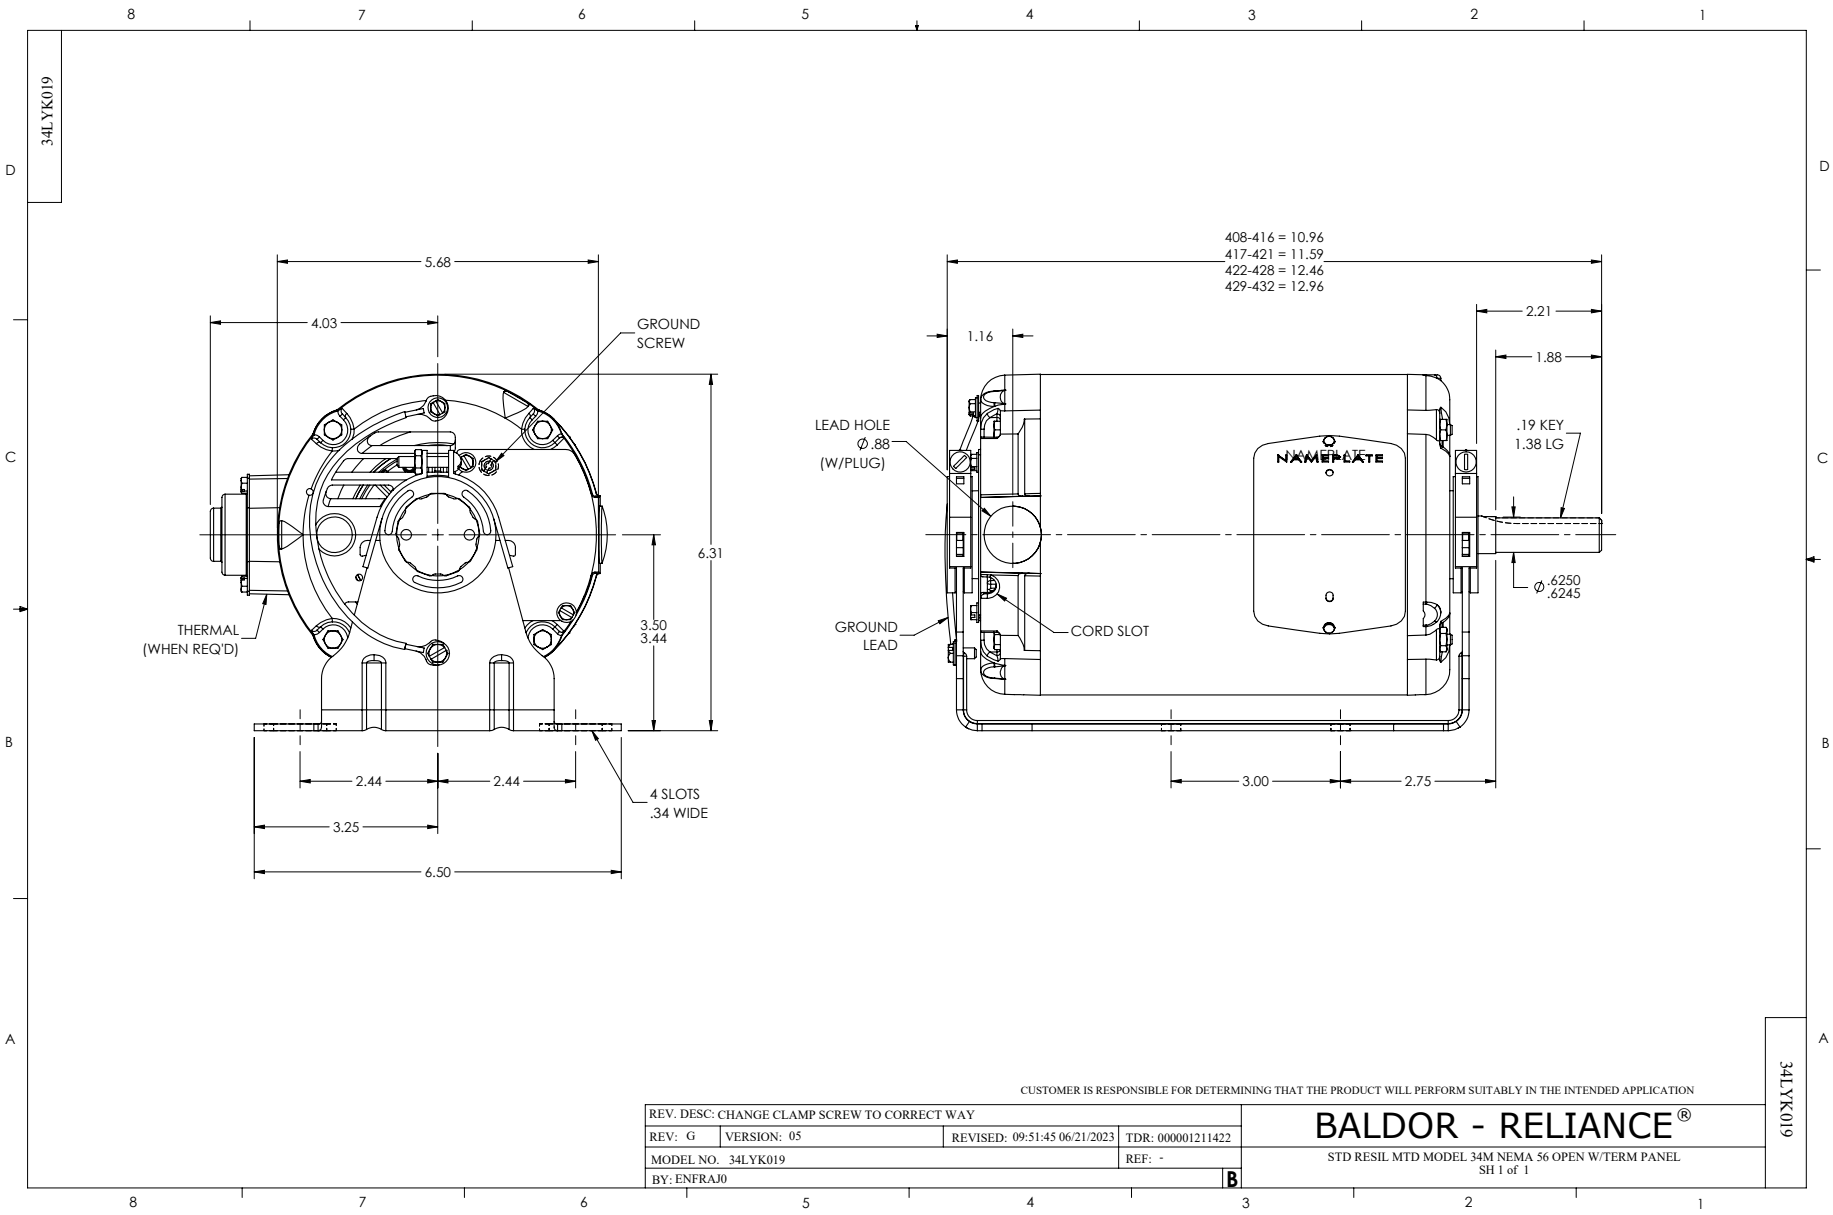
34LYK019
5.68
4.03
GROUND SCREW
6.31
3.50
3.44
THERMAL (WHEN REQ'D)
2.44
2.44
4 SLOTS .34 WIDE
3.25
6.50
408-416 = 10.96
417-421 = 11.59
422-428 = 12.46
429-432 = 12.96
2.21
1.88
1.16
LEAD HOLE Ø .88 (W/PLUG)
.19 KEY 1.38 LG
NAMEPLATE
Ø .6250 .6245
GROUND LEAD
CORD SLOT
3.00
2.75
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CHANGE CLAMP SCREW TO CORRECT WAY
REV: G
VERSION: 05
REVISED: 09:51:45 06/21/2023
TDR: 000001211422
MODEL NO. 34LYK019
REF: -
BY: ENFRAJ0
B
BALDOR - RELIANCE®
STD RESIL MTD MODEL 34M NEMA 56 OPEN W/TERM PANEL
SH 1 of 1
34LYK019

CD0005

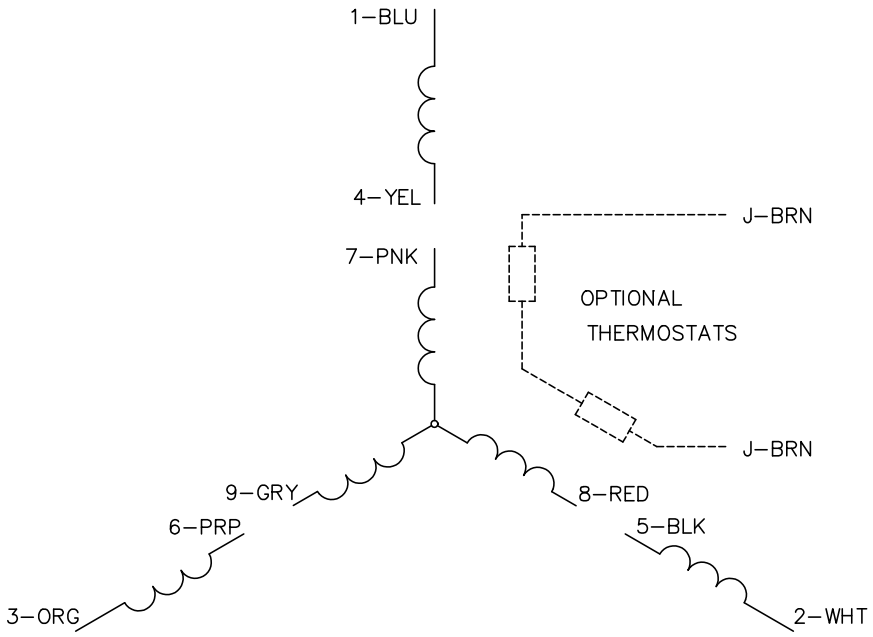

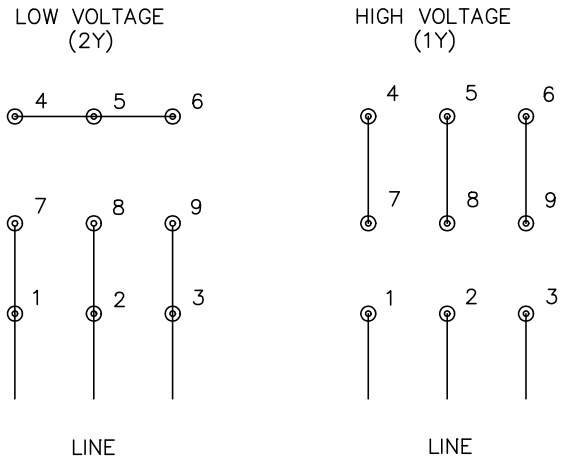

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS