



Customer information packet

FPM2513T

15//10HP, 1760//1460RPM, 3PH, 60//50HZ, 254T

Class -

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	254T
Frame Material	Steel
Frequency	50.00 Hz 60.00 Hz
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 50 HZ 15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	35.000 A @ 230.0 V 29.200 A @ 190.0 V 17.500 A @ 460.0 V 14.600 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated

Part detail

Revision	G
Type	AC
Mech. spec.	39D101
Base	
Status	PRD/A
Elec. spec.	39WGX948
Layout	39LYD101
Eff. date	11-14-2023
CD Diagram	CD0005
Poles	04
Leads	9#12
Proprietary	False
Created date	02-04-2016

Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	14.6 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3936M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.69 IN
Power Factor	87
Product Family	Fire Pump Motor
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1460 rpm 1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line

Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3454L

CAT.NO.	FPM2513T	CUST P/N		I.P.	23
SPEC.	39D101X948H2	SER.NO.		FRAME	254T
HZ	60	HP	15	RPM	1760
				HZ	50
				HP	10
				RPM	1460
VOLTS	230/460	CODE	F	VOLTS	190/380
		CODE	H		
AMPS	35/17.5	DES	B	AMPS	29.2/14.6
		DES	B		
EFF	91	SER.F.	1.15	PF	87
				EFF	90.2
				SER.F.	1.15
				PF	85
RATING	40C AMB-CONT	DE BRG	6309	GREASE	POLYREX EM
BLANK		ODE BRG	6208	MTR. WT.	205
		CLASS	F	PH	3
		ENCL	OPSB	CC	010A
HTR-VOLTS		HTR-AMPS		HTR-WATTS	

AC Induction Motor Performance Data

Record # 55290

Typical performance - not guaranteed values

Winding: 39WGX948-R001		Type: 3936M	Enclosure: OPSB	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	15//10	Full Load Torque	44.3 LB-FT	
Volts	230/460//190/380	Start Configuration	direct on line	
Full Load Amps	35/17.5//29.2/14.6	Breakdown Torque	139 LB-FT	
R.P.M.	1760//1460	Pull-up Torque	56.4 LB-FT	
Hz	60//50 Phase	Locked-rotor Torque	80.6 LB-FT	
NEMA Design Code	B KVA Code	F	Starting Current	105 A
Service Factor (S.F.)	1.15	No-load Current	5.89 A	
NEMA Nom. Eff.	91 Power Factor	87	Line-line Res. @ 25°C	0.733 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	33°C	
S.F. Amps		Temp. Rise @ S.F. Load	42°C	
		Locked-rotor Power Factor	35	
		Rotor inertia	1.57 LB-FT ²	

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	77	84	87	88	88	88
Efficiency	87.6	91.5	92.2	91.4	90.4	88.9	90.8
Speed	1791	1782	1772	1761	1749	1735	1754
Line amperes	7.21	10.1	13.6	17.5	22	26.7	20.2


ABB Motors and Mechanical Inc.

WINDING # 39WGX948

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 1761 RPM 460 V 3936M

TORQUES (LB-FT): PO=139 PU=56.4 LR=80.6 LRA=105

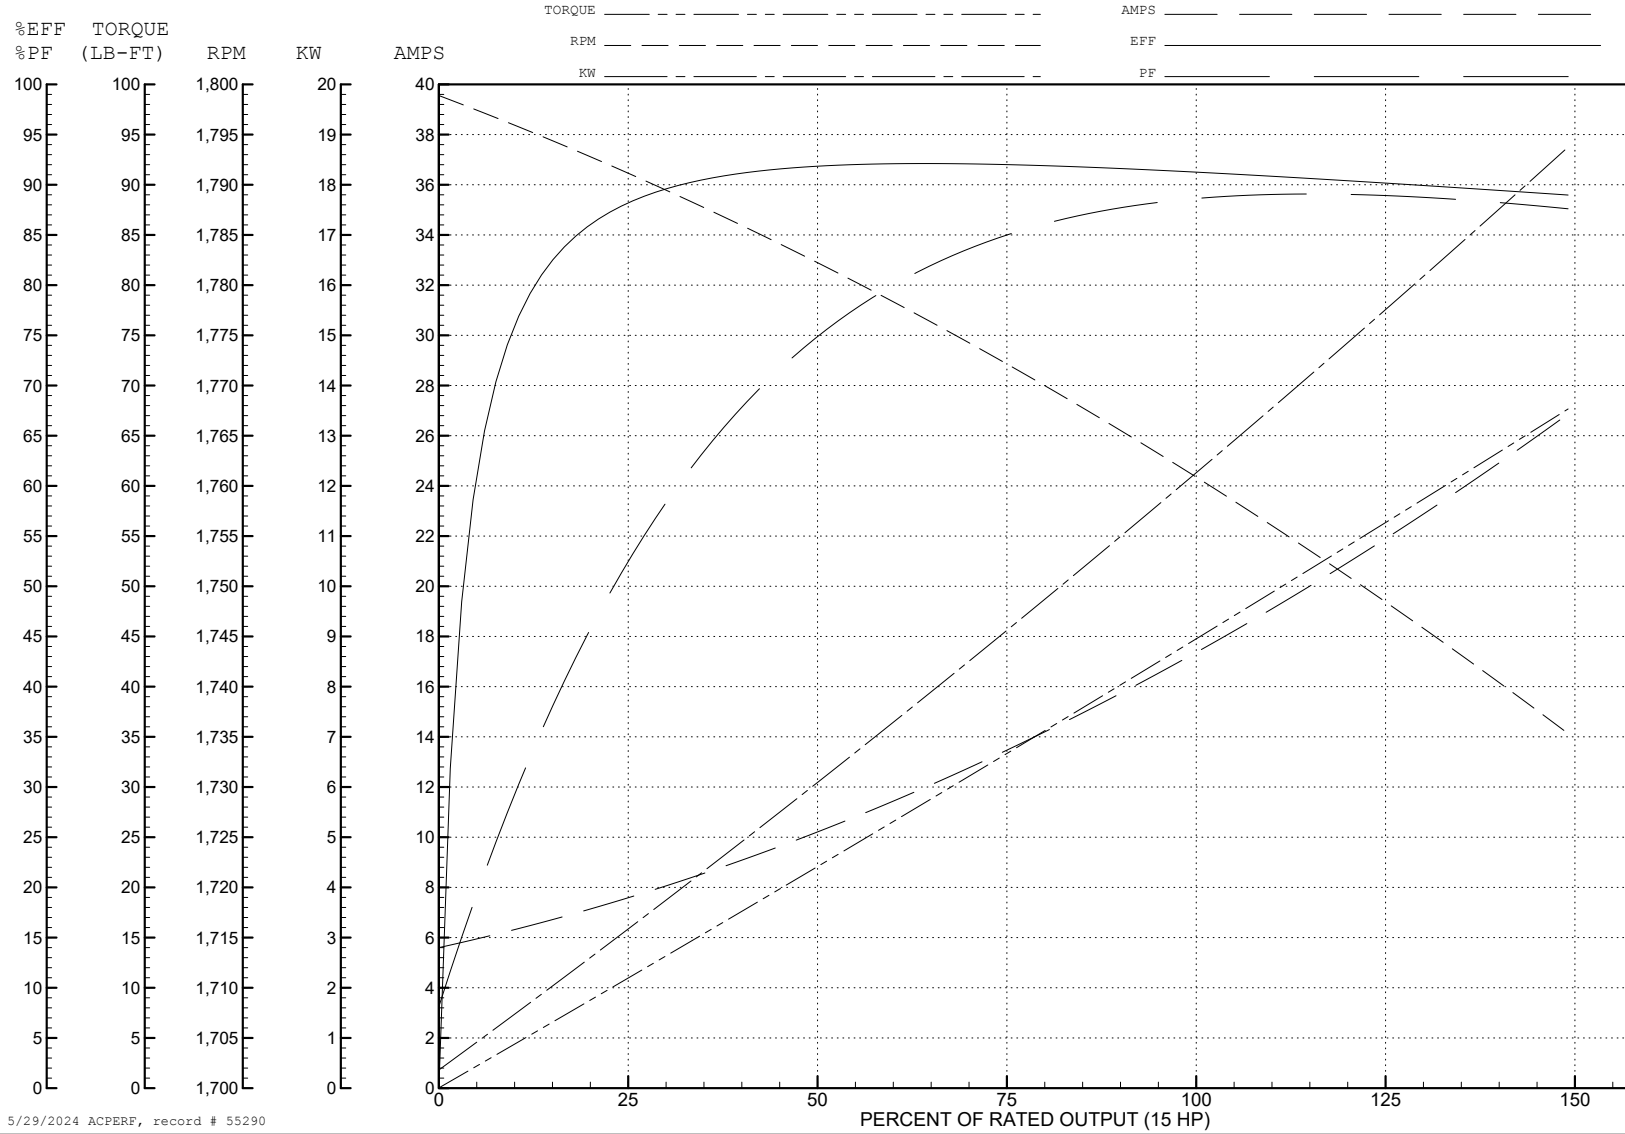

5/29/2024 ACPERF, record # 55290

AC Induction Motor Performance Data

Record # 55291

Typical performance - not guaranteed values

Winding: 39WGX948-R001		Type: 3936M	Enclosure: OPSB	
Nameplate Data			380 V, 50 Hz: High Voltage Connection	
Rated Output (HP)	15//10	Full Load Torque	35.4 LB-FT	
Volts	230/460//190/380	Start Configuration	direct on line	
Full Load Amps	35/17.5//29.2/14.6	Breakdown Torque	133 LB-FT	
R.P.M.	1760//1460	Pull-up Torque	57.8 LB-FT	
Hz	60//50 Phase	Locked-rotor Torque	82.7 LB-FT	
NEMA Design Code	B KVA Code	F	Starting Current	101 A
Service Factor (S.F.)	1.15	No-load Current	5.77 A	
NEMA Nom. Eff.	91 Power Factor	87	Line-line Res. @ 25°C	0.733 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	25°C	
S.F. Amps		Temp. Rise @ S.F. Load	31°C	
		Locked-rotor Power Factor	38.8	
		Rotor inertia	1.57 LB-FT ²	

Load Characteristics 380 V, 50 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	49	71	81	85	87	88	86
Efficiency	86.3	90.9	91.8	91.1	90.3	89	90.6
Speed	1493	1485	1477	1468	1459	1448	1463
Line amperes	6.75	8.91	11.5	14.5	18	21.5	16.6


ABB Motors and Mechanical Inc.

WINDING # 39WGX948


Typical performance - not guaranteed values.

10 HP 3 PH 50 HZ 1468 RPM 380 V 3936M

TORQUES (LB-FT): PO=133 PU=57.8 LR=82.7 LRA=101

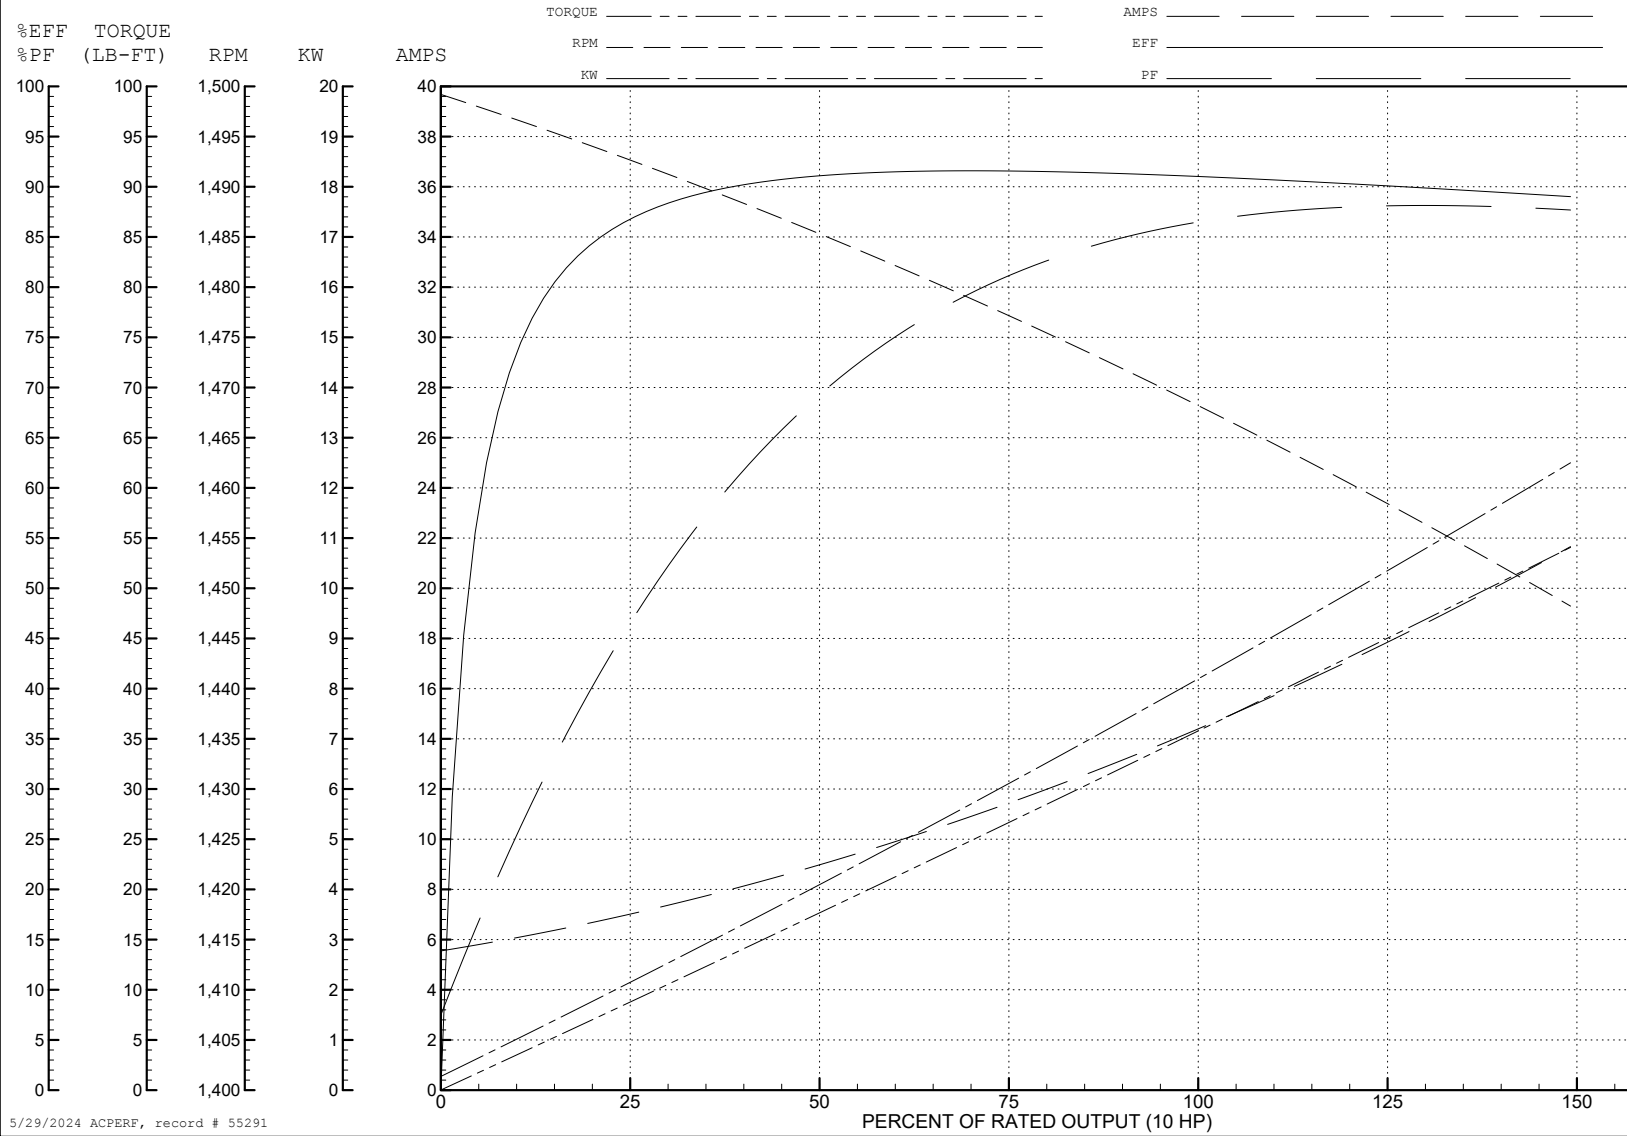

5/29/2024 ACPERF, record # 55291

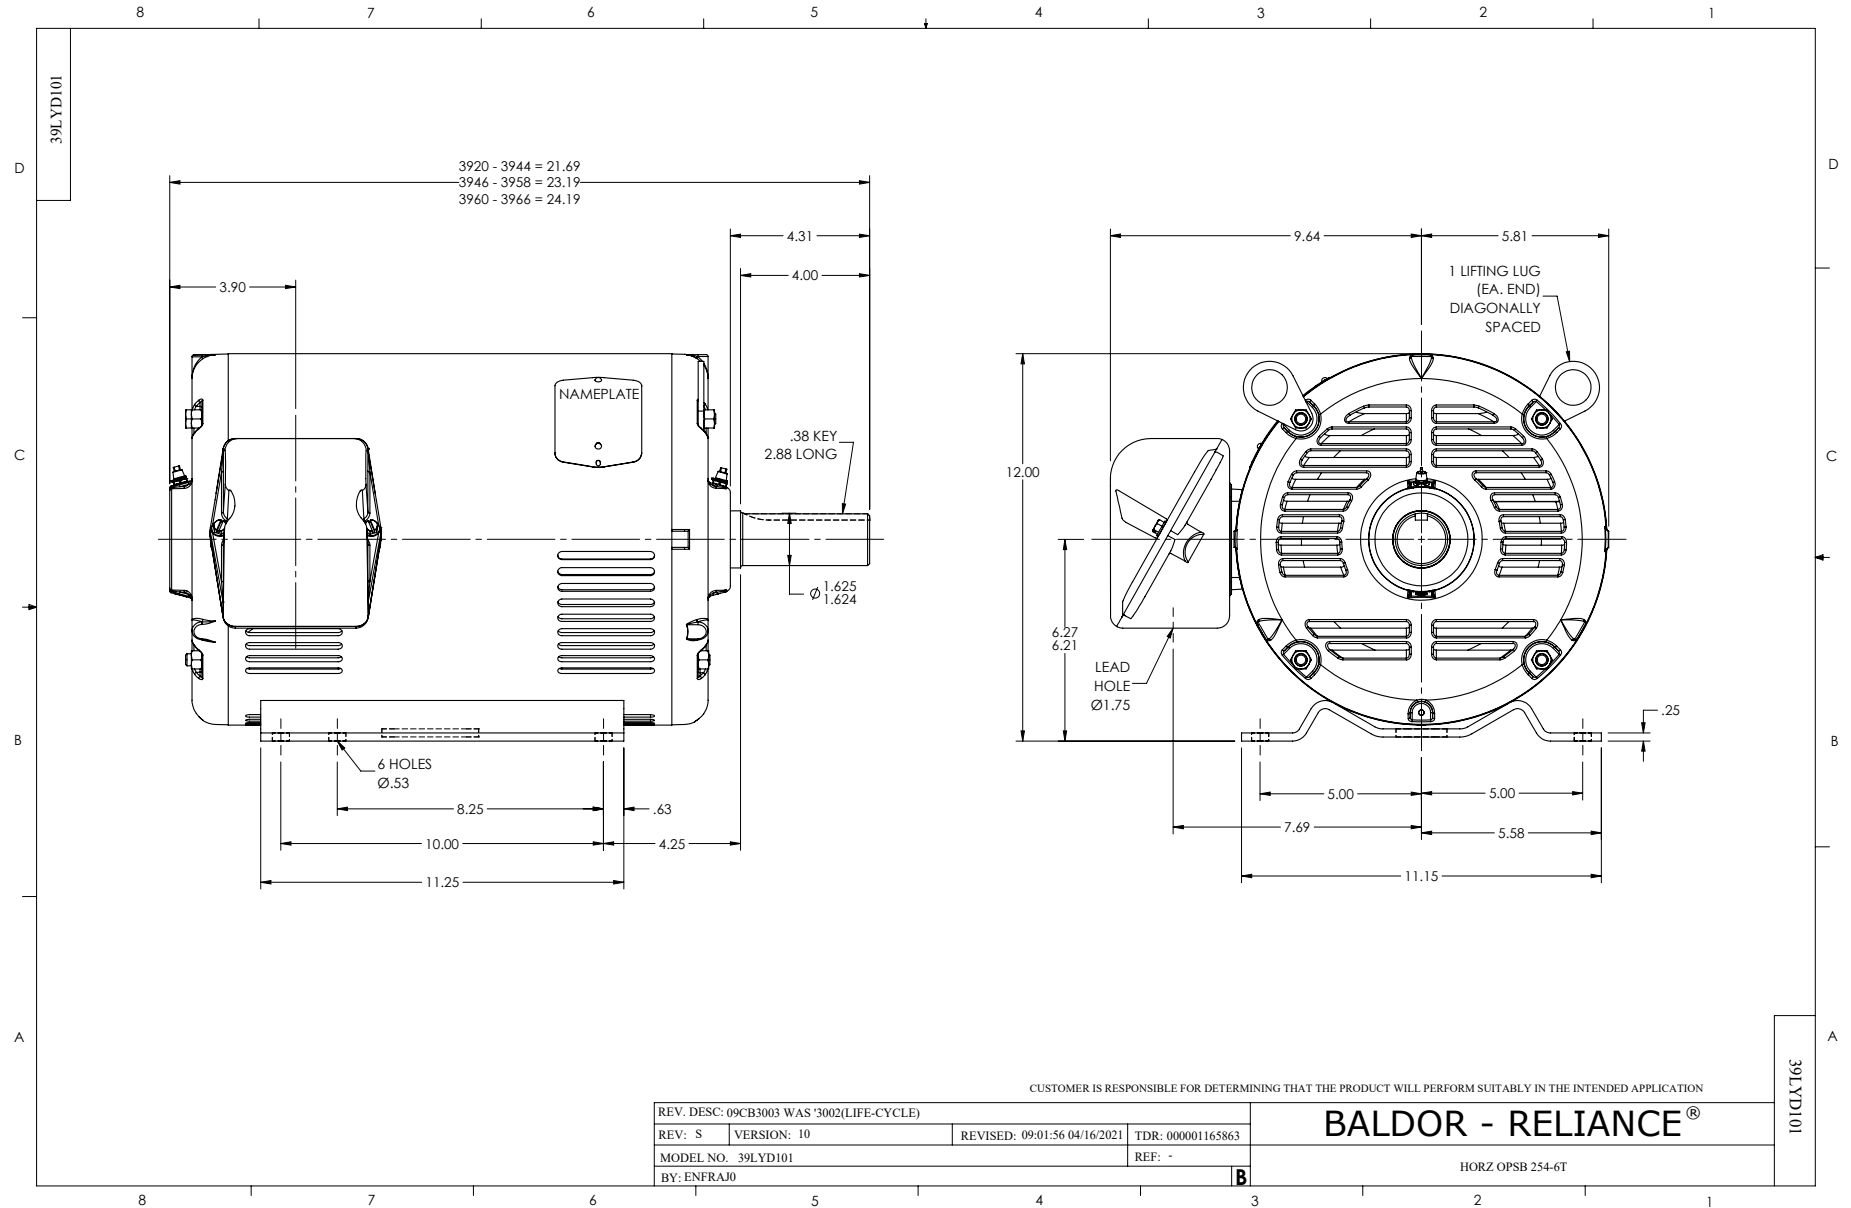

CD0005



LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS