

# ABB BALDOR RELIANCE III

---

## Customer information packet

### FPM2543TS-5

50HP, 1770RPM, 3PH, 60HZ, 326TS, 4064M, ODP, F1

**Specifications**

|                                       |                           |
|---------------------------------------|---------------------------|
| <b>Enclosure</b>                      | ODP                       |
| <b>Frame</b>                          | 326TS                     |
| <b>Frame Material</b>                 | Steel                     |
| <b>Frequency</b>                      | 60.00 Hz                  |
| <b>Motor Letter Type</b>              | Three Phase               |
| <b>Output @ Frequency</b>             | 50.000 HP @ 60 HZ         |
| <b>Phase</b>                          | 3                         |
| <b>Synchronous Speed @ Frequency</b>  | 1800 RPM @ 60 HZ          |
| <b>Voltage @ Frequency</b>            | 575.0 V @ 60 HZ           |
| <b>Agency Approvals</b>               | CSA EEV                   |
|                                       | UL                        |
| <b>Ambient Temperature</b>            | 40 °C                     |
| <b>Auxiliary Box</b>                  | NO AUXILLARY BOX          |
| <b>Auxiliary Box Lead Termination</b> | None                      |
| <b>Base Indicator</b>                 | Rigid                     |
| <b>Bearing Grease Type</b>            | Polyrex EM (-20F +300F)   |
| <b>Blower</b>                         | None                      |
| <b>Current @ Voltage</b>              | 49.000 A @ 575.0 V        |
| <b>Design Code</b>                    | B                         |
| <b>Drip Cover</b>                     | No Drip Cover             |
| <b>Duty Rating</b>                    | CONT                      |
| <b>Efficiency @ 100% Load</b>         | 93.0 %                    |
| <b>Electrically Isolated Bearing</b>  | Not Electrically Isolated |
| <b>Feedback Device</b>                | NO FEEDBACK               |
| <b>Front Face Code</b>                | Standard                  |
| <b>Front Shaft Indicator</b>          | None                      |
| <b>Heater Indicator</b>               | No Heater                 |
| <b>High Voltage Full Load Amps</b>    | 49.0 a                    |
| <b>Insulation Class</b>               | F                         |
| <b>Inverter Code</b>                  | Not Inverter              |
| <b>KVA Code</b>                       | F                         |
| <b>Lifting Lugs</b>                   | Standard Lifting Lugs     |

**Part Detail**

|                     |            |
|---------------------|------------|
| <b>Revision</b>     | D          |
| <b>Type</b>         | AC         |
| <b>Mech. spec.</b>  | 40H07      |
| <b>Base</b>         |            |
| <b>Status</b>       | PRD/A      |
| <b>Elec. spec.</b>  | 40WGX357   |
| <b>Layout</b>       | 40LYH007   |
| <b>Eff. date</b>    | 07-24-2023 |
| <b>CD Diagram</b>   | CD0382     |
| <b>Poles</b>        | 04         |
| <b>Leads</b>        | 6#8        |
| <b>Proprietary</b>  | False      |
| <b>Created date</b> | 07-20-2016 |

|                                      |                       |
|--------------------------------------|-----------------------|
| <b>Locked Bearing Indicator</b>      | No Locked Bearing     |
| <b>Motor Lead Exit</b>               | Ko Box                |
| <b>Motor Lead Quantity/Wire Size</b> | 6 @ 8 AWG             |
| <b>Motor Lead Termination</b>        | Flying Leads          |
| <b>Motor Standards</b>               | NEMA                  |
| <b>Motor Type</b>                    | 4064M                 |
| <b>Mounting Arrangement</b>          | F1                    |
| <b>Number of Poles</b>               | 4                     |
| <b>Overall Length</b>                | 25.69 IN              |
| <b>Power Factor</b>                  | 83                    |
| <b>Product Family</b>                | Fire Pump Motor       |
| <b>Pulley End Bearing Type</b>       | Ball                  |
| <b>Pulley Face Code</b>              | Standard              |
| <b>Pulley Shaft Indicator</b>        | Standard              |
| <b>Rodent Screen</b>                 | None                  |
| <b>Service Factor</b>                | 1.15                  |
| <b>Shaft Diameter</b>                | 1.875 IN              |
| <b>Shaft Extension Location</b>      | Pulley End            |
| <b>Shaft Ground Indicator</b>        | No Shaft Grounding    |
| <b>Shaft Rotation</b>                | Reversible            |
| <b>Shaft Slinger Indicator</b>       | No Slinger            |
| <b>Speed</b>                         | 1770 rpm              |
| <b>Speed Code</b>                    | Single Speed          |
| <b>Starting Method</b>               | Wye Start - Delta Run |
| <b>Thermal Device - Bearing</b>      | None                  |
| <b>Thermal Device - Winding</b>      | None                  |
| <b>Vibration Sensor Indicator</b>    | No Vibration Sensor   |
| <b>Winding Thermal 1</b>             | None                  |
| <b>Winding Thermal 2</b>             | None                  |

**Nameplate**

| NP3454L          |              |                 |      |                  |                 |      |  |              |      |                 |            |             |  |
|------------------|--------------|-----------------|------|------------------|-----------------|------|--|--------------|------|-----------------|------------|-------------|--|
| <b>CAT.NO.</b>   | FPM2543TS-5  |                 |      |                  | <b>CUST P/N</b> |      |  |              |      | <b>I.P.</b>     | 23         |             |  |
| <b>SPEC.</b>     | 40H007X357H2 |                 |      |                  | <b>SER.NO.</b>  |      |  |              |      | <b>FRAME</b>    | 326TS      |             |  |
| <b>HZ</b>        | 60           | <b>HP</b>       | 50   |                  | <b>RPM</b>      | 1770 |  | <b>HZ</b>    |      | <b>HP</b>       |            | <b>RPM</b>  |  |
| <b>VOLTS</b>     | 575          |                 |      | <b>CODE</b>      | F               |      |  | <b>VOLTS</b> |      |                 |            | <b>CODE</b> |  |
| <b>AMPS</b>      | 49           |                 |      | <b>DES</b>       | B               |      |  | <b>AMPS</b>  |      |                 |            | <b>DES</b>  |  |
| <b>EFF</b>       | 93           | <b>SER.F.</b>   | 1.15 |                  | <b>PF</b>       | 83   |  | <b>EFF</b>   |      | <b>SER.F.</b>   |            | <b>PF</b>   |  |
| <b>RATING</b>    | 40C AMB-CONT |                 |      |                  | <b>DE BRG</b>   | 6312 |  |              |      | <b>GREASE</b>   | POLYREX EM |             |  |
| <b>BLANK</b>     |              |                 |      |                  | <b>ODE BRG</b>  | 6309 |  |              |      | <b>MTR. WT.</b> | 452        |             |  |
|                  |              |                 |      |                  | <b>CLASS</b>    | F    |  | <b>PH</b>    | 3    |                 |            |             |  |
|                  |              |                 |      |                  | <b>ENCL</b>     | ODP  |  | <b>CC</b>    | 010A |                 |            |             |  |
| <b>HTR-VOLTS</b> |              | <b>HTR-AMPS</b> |      | <b>HTR-WATTS</b> |                 |      |  |              |      |                 |            |             |  |

**AC Induction Motor Performance Data**

Record # 58308

Typical performance - not guaranteed values

| Winding: 40WGX357-R001 |          |      | Type: 4064M                           |   | Enclosure: OPSB           |                       |             |         |
|------------------------|----------|------|---------------------------------------|---|---------------------------|-----------------------|-------------|---------|
| Nameplate Data         |          |      | 575 V, 60 Hz:<br>Single Voltage Motor |   |                           |                       |             |         |
| Rated Output (HP)      |          | 50   | Full Load Torque                      |   | 149 LB-FT                 |                       |             |         |
| Volts                  |          | 575  | Start Configuration                   |   | direct on line            |                       |             |         |
| Full Load Amps         |          | 49   | Breakdown Torque                      |   | 380 LB-FT                 |                       |             |         |
| R.P.M.                 |          | 1770 | Pull-up Torque                        |   | 194 LB-FT                 |                       |             |         |
| Hz                     | 60 Phase | 3    | Locked-rotor Torque                   |   | 240 LB-FT                 |                       |             |         |
| NEMA Design Code       |          | B    | KVA Code                              | F | Starting Current          |                       | 279 A       |         |
| Service Factor (S.F.)  |          | 1.15 | No-load Current                       |   | 19 A                      |                       |             |         |
| NEMA Nom. Eff.         |          | 93   | Power Factor                          |   | 83                        | Line-line Res. @ 25°C |             | 0.241 Ω |
| Rating - Duty          |          | 40C  | AMB-CONT                              |   | Temp. Rise @ Rated Load   |                       | 55°C        |         |
| S.F. Amps              |          |      |                                       |   | Temp. Rise @ S.F. Load    |                       | 69°C        |         |
|                        |          |      |                                       |   | Locked-rotor Power Factor |                       | 31.1        |         |
|                        |          |      |                                       |   | Rotor inertia             |                       | 5.09 LB-FT2 |         |

**Load Characteristics 575 V, 60 Hz, 50 HP**

| % of Rated Load | 25   | 50   | 75   | 100  | 125  | 150  | S.F. |
|-----------------|------|------|------|------|------|------|------|
| Power Factor    | 47   | 69   | 78   | 83   | 84   | 84   | 84   |
| Efficiency      | 90.4 | 93.6 | 94   | 93.5 | 92.9 | 91.8 | 93.3 |
| Speed           | 1794 | 1787 | 1779 | 1771 | 1763 | 1752 | 1766 |
| Line amperes    | 22   | 29.2 | 38.2 | 48.5 | 60.1 | 72.7 | 55.5 |


ABB Motors and Mechanical Inc.

WINDING # 40WGx357

Typical performance - not guaranteed values.


50 HP 3 PH 60 HZ 1770 RPM 575 V 4064M

TORQUES (LB-FT): PO=380 PU=194 LR=240 LRA=279

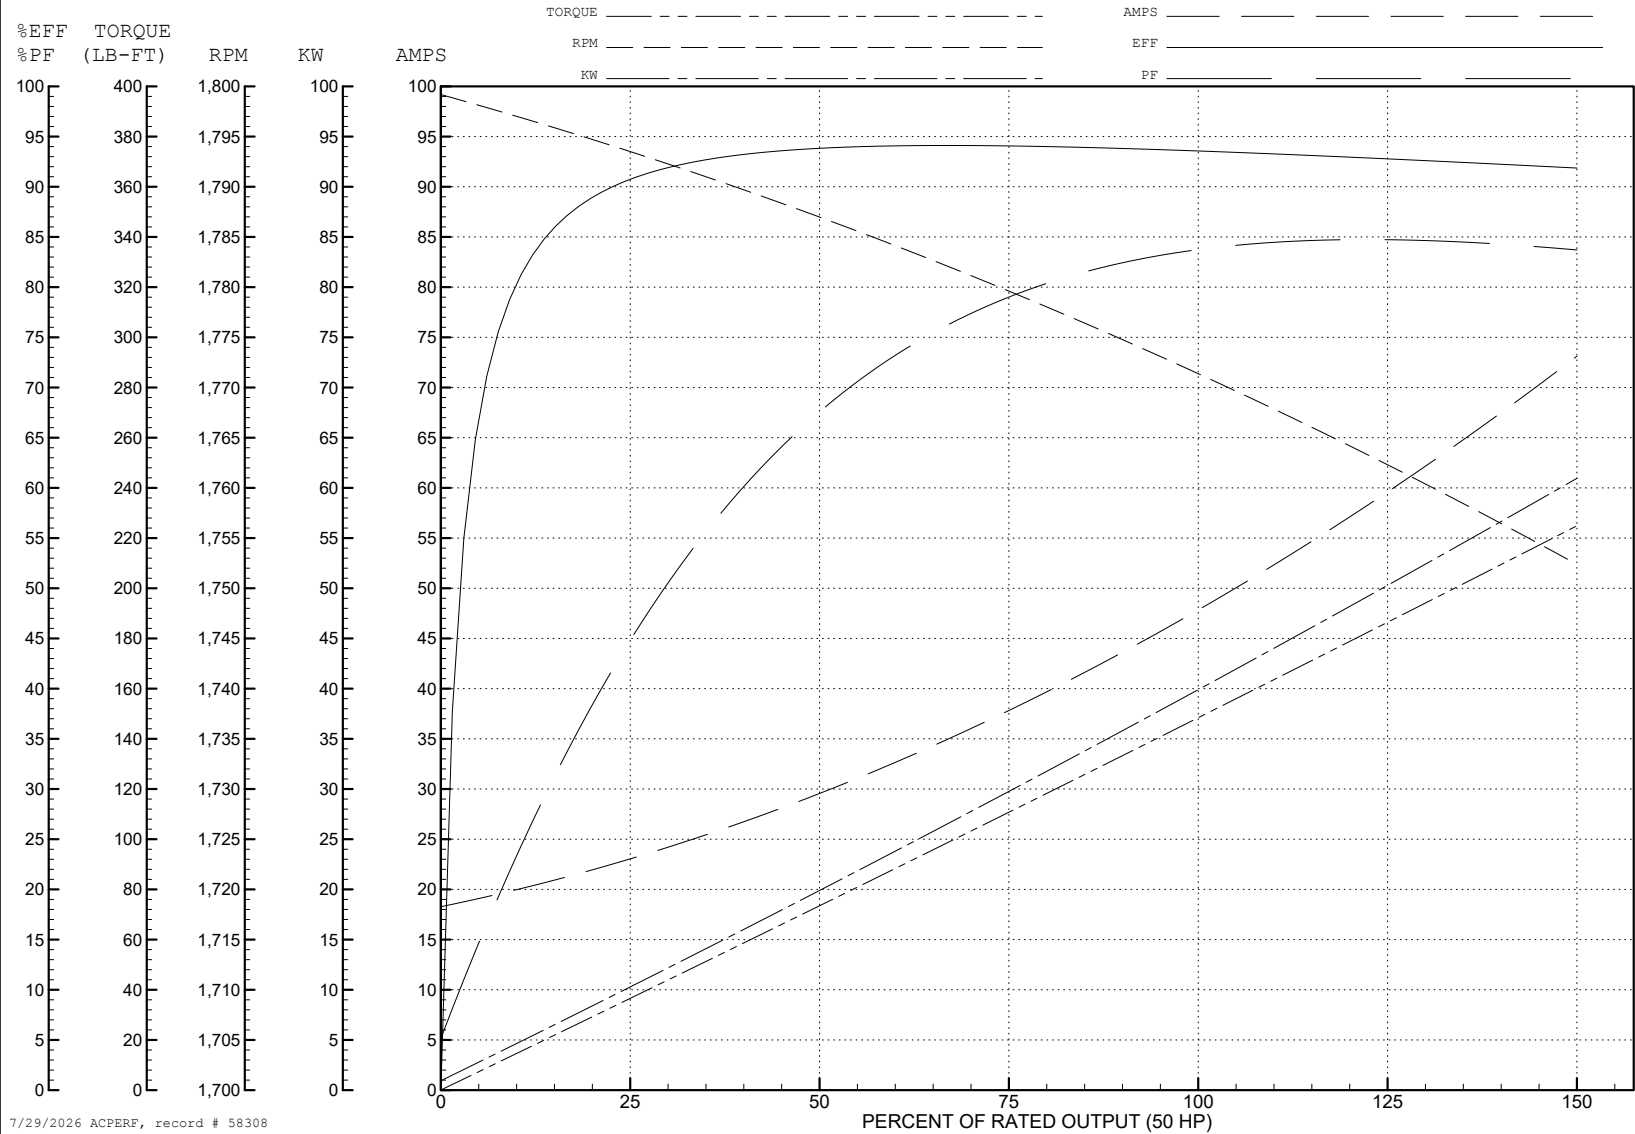





CD0382

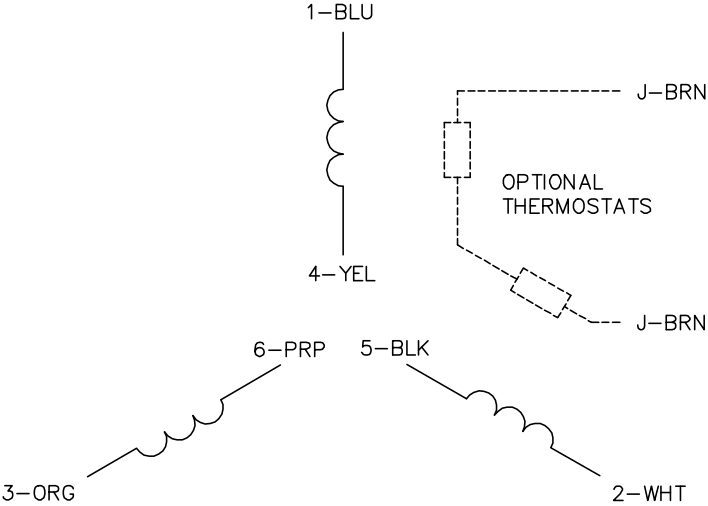

RUN CONNECTION  
(1D)



START CONNECTION  
(1Y)



- NOTES:
1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
  2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
  3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
  4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
  5. FOR ACROSS-THE-LINE STARTING, USE 'RUN' CONNECTION.

REV. DESC: ADD CLASS CONN00000007

REV. LTR: F

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\243

REVISED: 09:05:32 02/19/2019

BY: ENBRIRO

MTL: -



**BALDOR - RELIANCE®**

3PH, SV, 6 LEADS, Y START/D RUN

SH 1 of 1

CD0382