

ABB BALDOR RELIANCE III

Customer information packet

IDVSM3661T

3HP, 1755RPM, 3PH, 60HZ, 182TC, 0632M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	182TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.100 A @ 460.0 V 8.200 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Encoder/Feedback Device
Front Shaft Indicator	No Key Or Flat
Heater Indicator	No Heater
High Voltage Full Load Amps	4.1 a

Part Detail

Revision	L
Type	AC
Mech. spec.	06H926
Base	
Status	PRD/A
Elec. spec.	06WGX181
Layout	06LYH926
Eff. date	06-18-2026
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	09-05-2012

Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0632M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	20.23 IN
Power Factor	77
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1755 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4615L			
CAT NO	IDVSM3661T		
SPEC.	06H926X181G1	ENCL	TEFC
FRAME	182TC	HP	3
VOLTS	230/460		
MAG CUR	4.2/2.1	FLA	8.2/4.1
RPM	1755	RPM MAX	5400
HZ	60	PH	3
		CLASS	F
SER.F.	1.00	SL HZ	1.5
NEMA-NOM-EFF	89.5	WK2	0.3
RATING	40C AMB-CONT		
DE BRG	6206	ODE BRG	6206
CC	010A	SN	
	1.5:1 CHP PWM		
	1000:1 CT/VT		

REL S.O.	IDVSM3661T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	182TC	AMPS	4.1	MAX SAFE RPM	5400	(AT BASE RATING, 25 ⁰ C)			
HP	3	DUTY	CONT	In (AMPS)	2.1	R1	2.0800	X1	5.4900
BASE SPEED	1760	S.F.	1.0	P.F. @NL/FL	6/77	R2	1.4800	X2	4.5800
PHASE/HZ	3/60	AMB ⁰ C/INSUL	40/F	WK ² (lb-ft ²)	0.298			XM	119.3000

Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1757	3.0	9.06	460	60	4.10
Max Speed	2630	3.0	6.04	460	90	3.90
Min Speed	0	0.0	9.06	33.37	1.43	4.10


Load Performance at Base Speed

	RPM	HP	Torque	Volts	Freq-Hz	Amps
No Load	1799	0.0	0.00	460	60	2.10
1/4	1789	0.8	2.31	460	60	2.34
1/2	1779	1.5	4.54	460	60	2.79
3/4	1769	2.3	6.80	460	60	3.39
Full Load	1757	3.0	9.06	460	60	4.10
O/L	1700	6.5	20.20	460	60	8.50

--	--	--	--	--	--	--


Blower Data	Volts	Ph/Hz	FL Amps	LR Amps	Frame	CFM

Remarks: Calculated Data
Vector PWM Inverter Duty

	DR BY <u>Micheal Williamson</u>	A-C MOTOR PERFORMANCE CURVES 06G938X181Z1	ISSUE DATE 8/20/2012
	CK BY <u>Micheal Williamson</u>		
	APP BY <u>Micheal Williamson</u>		
	DATE <u>8/20/2012</u>		

REL S.O.	IDVSM3661T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	182TC	AMPS	4.1	MAX SAFE RPM	5400	(AT BASE RATING, 25 ⁰ C)			
HP	3	DUTY	CONT	In (AMPS)	2.1	R1	2.0800	X1	5.4900
BASE SPEED	1760	S.F.	1.00	P.F. @NL/FL	6/77	R2	1.4800	X2	4.5800
PHASE/HZ	3/60	AMB ⁰ C/INSUL	40/F	WK ² (lb-ft ²)	0.298			XM	119.3000

Vector PWM Inverter Duty
Variable Speed AC Motor Curves

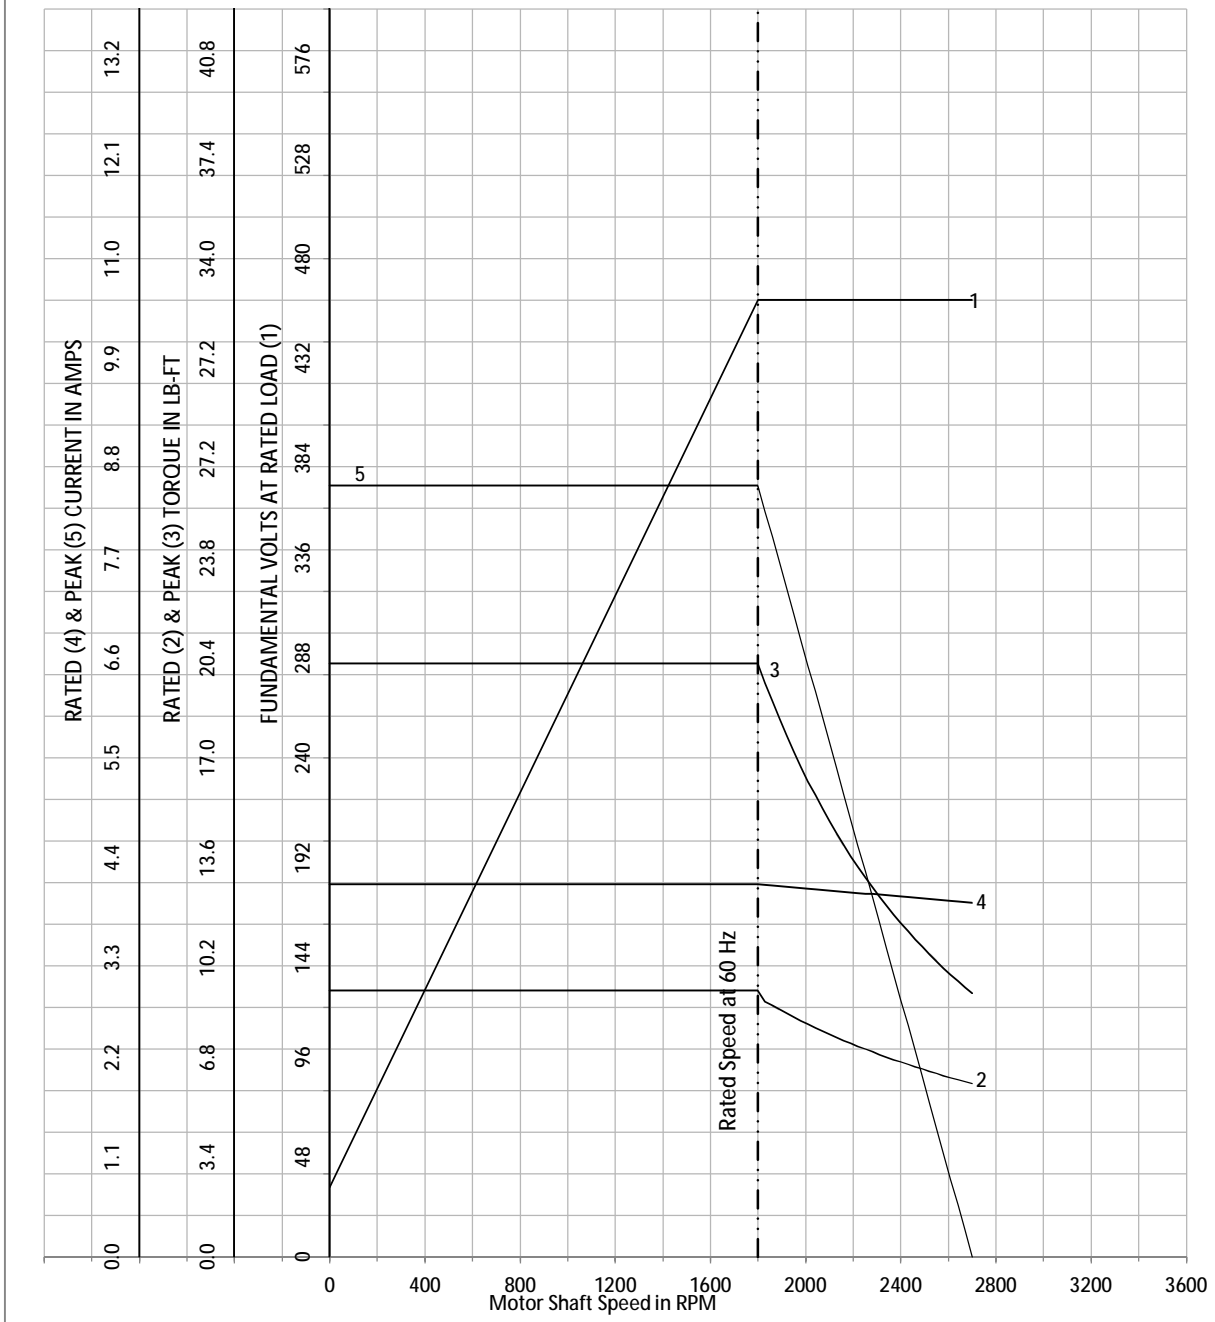

Calculated Data

Data Valid For Nameplate Speed Range only



DR BY Micheal Williamson
 CK BY Micheal Williamson
 APP BY Micheal Williamson
 DATE 8/20/2012


A-C MOTOR PERFORMANCE
CURVES

06G938X181Z1

SH 1 of 2
ISSUE DATE 8/20/2012

REL S.O.	IDVSM3661T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	182TC	AMPS	4.1	MAX SAFE RPM	5400	(AT BASE RATING, 25 ⁰ C)			
HP	3	DUTY	CONT	In (AMPS)	2.1	R1	2.0800	X1	5.4900
BASE SPEED	1760	S.F.	1.00	P.F. @NL/FL	6/77	R2	1.4800	X2	4.5800
PHASE/HZ	3/60	AMB ⁰ C/INSUL	40/F	WK ² (Lb-Ft ²)	0.298			XM	119.3000

Vector PWM Inverer Duty
Variable Speed AC Motor Curves

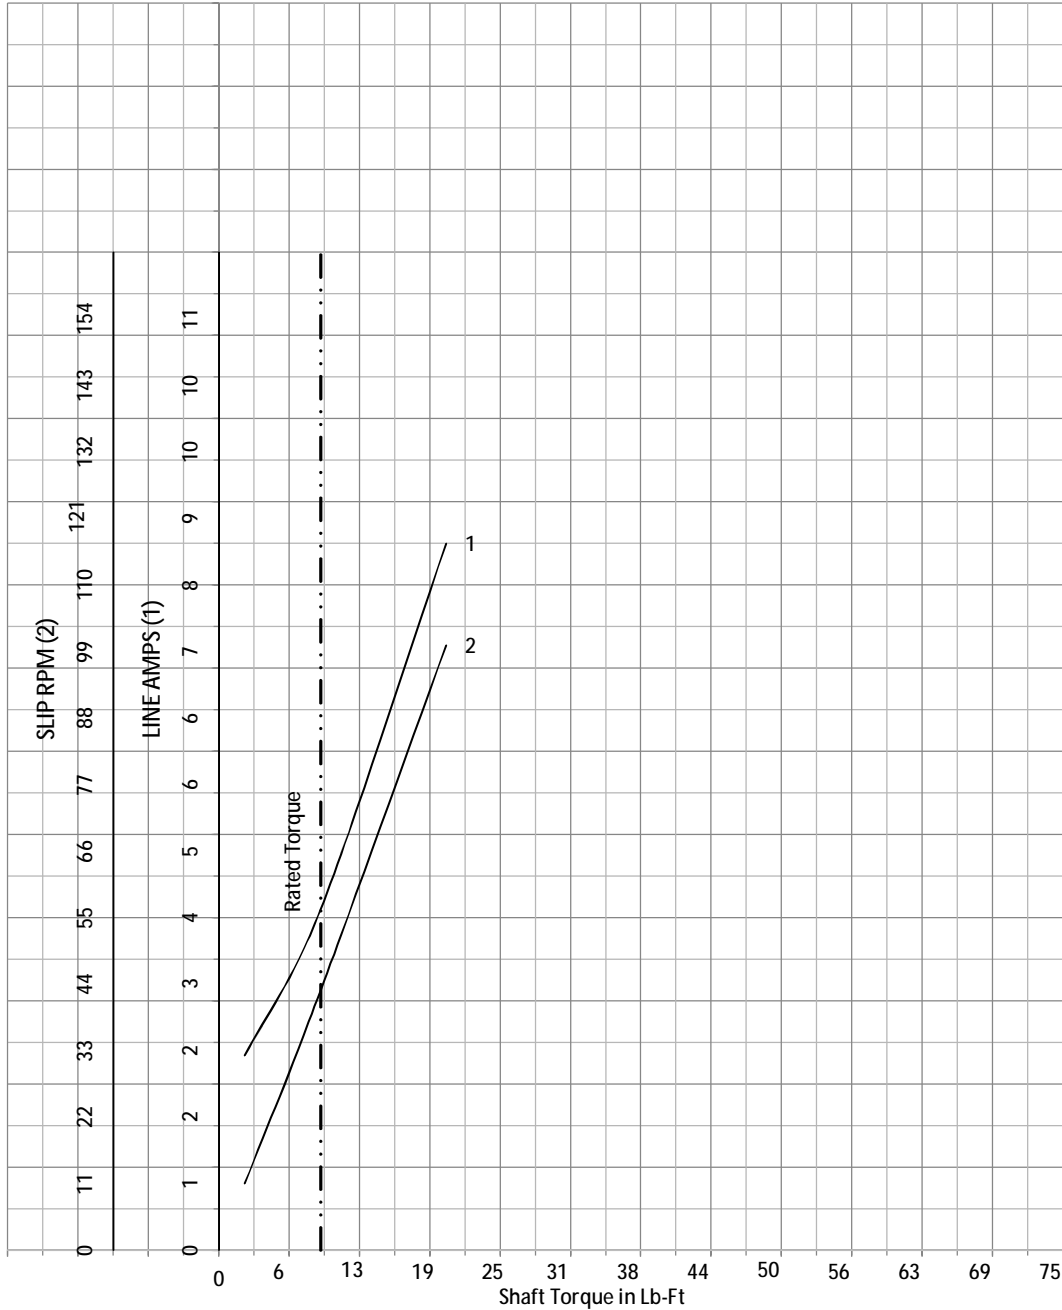

Calculated Data

Data Valid For Nameplate Speed Range only




DR BY Michael Williamson
 CK BY Michael Williamson
 APP BY Michael Williamson
 DATE 8/20/2012

A-C MOTOR
PERFORMANCE CURVES

06G938X181Z1


SH 1 of 2
ISSUE DATE 8/20/2012

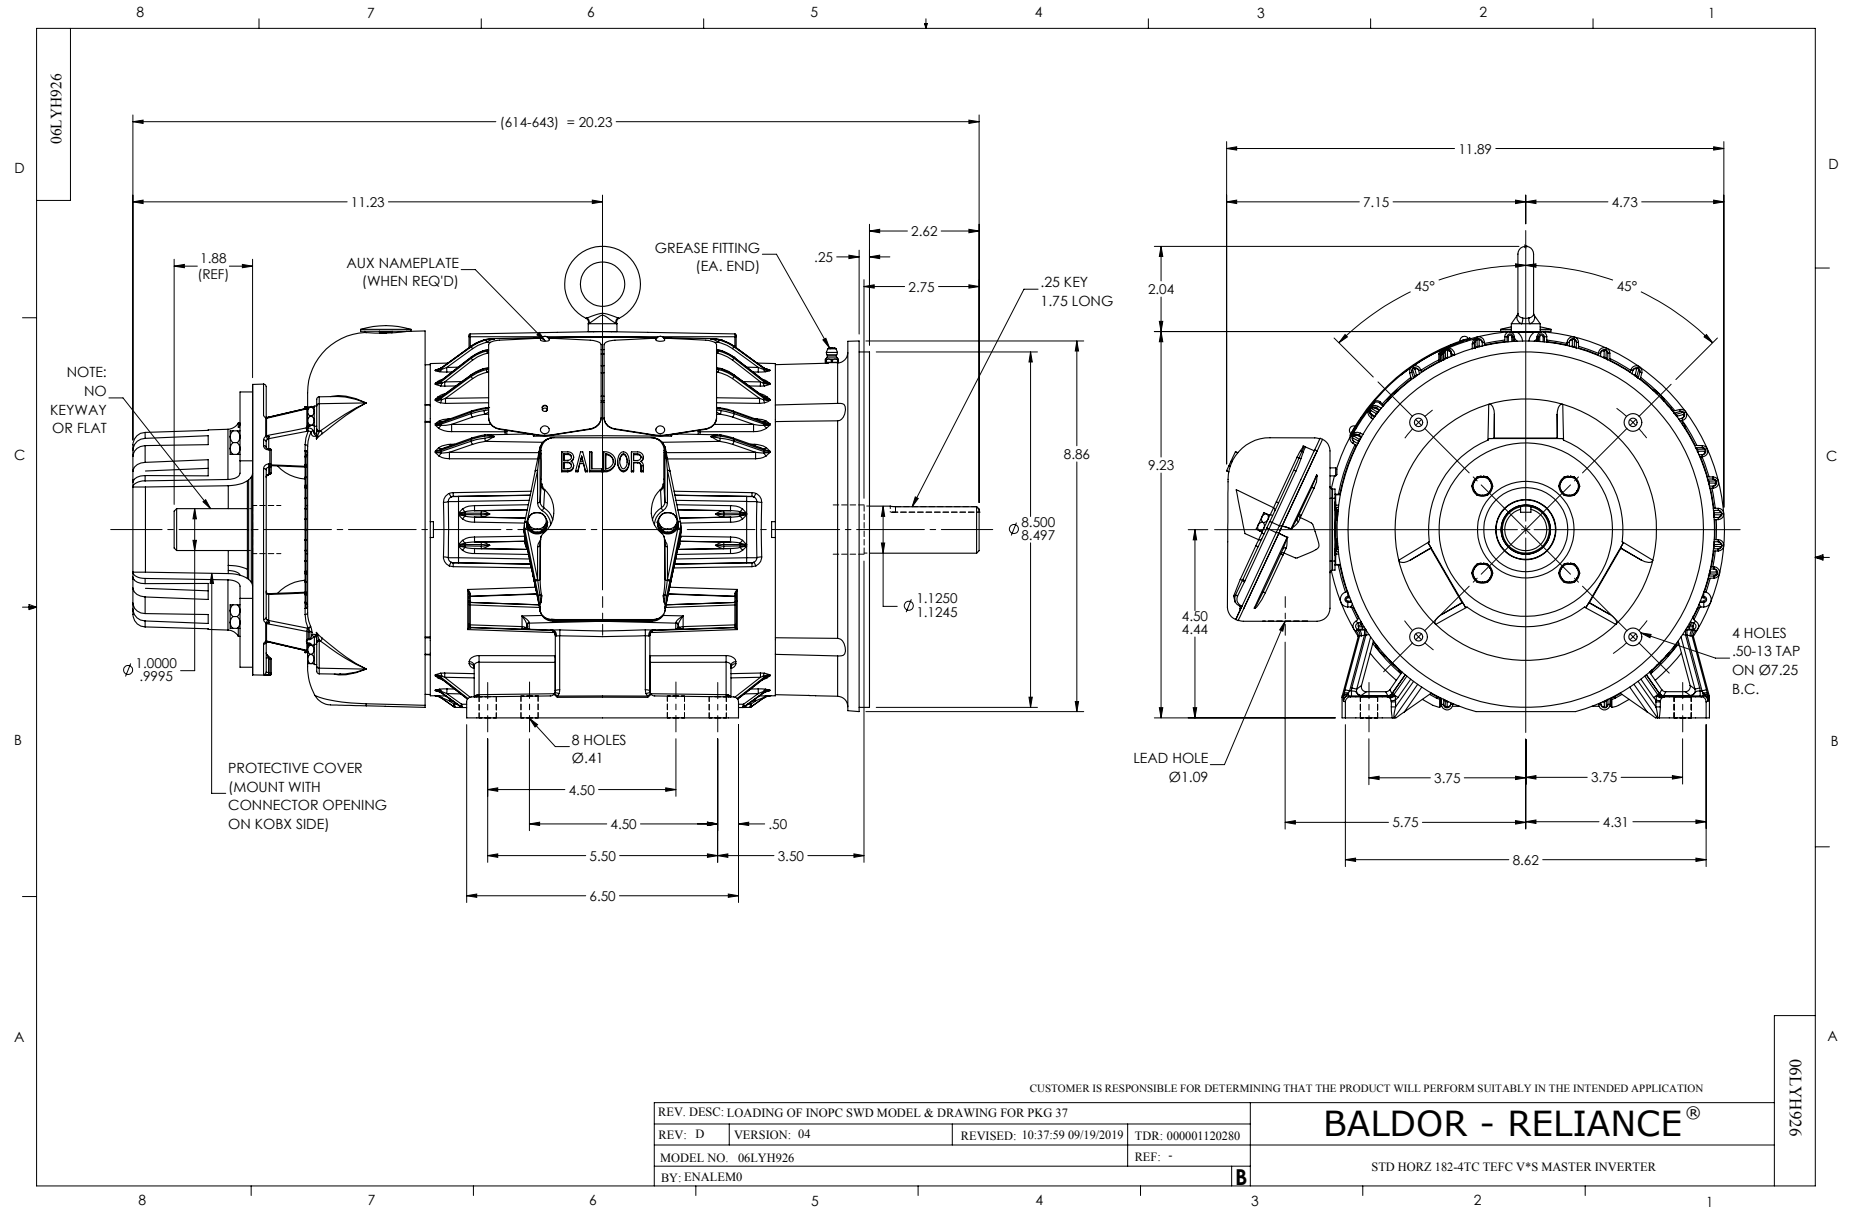

CD0005



LOW VOLTAGE
(2Y)

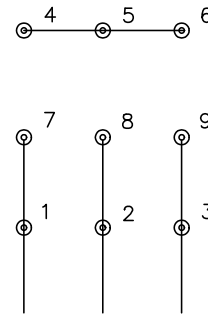

LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E BY: JLP REVISED: 01/19/99 10:15 TDR: 0171435

500000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS