# Customer information packet

IDVSNM3534

.33HP, 1780RPM, 3PH, 60HZ, 56C, 3512M, TENV, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/19/2026 2:06:06 AM

## Specifications

| | |
|---|---|
| **Enclosure** | TENV |
| **Frame** | 56C |
| **Frame Material** | Steel |
| **Frequency** | 60.00 Hz |
| **Haz Area Class and Group** | None |
| **Haz Area Division** | Not Applicable |
| **Motor Letter Type** | Three Phase |
| **Output @ Frequency** | .330 HP @ 60 HZ |
| **Phase** | 3 |
| **Synchronous Speed @ Frequency** | 1800 RPM @ 60 HZ |
| **Voltage @ Frequency** | 230.0 V @ 60 HZ |
| | 460.0 V @ 60 HZ |
| **Agency Approvals** | CSA |
| | UR |
| **Ambient Temperature** | 40 °C |
| **Auxiliary Box** | NO AUXILLARY BOX |
| **Auxiliary Box Lead Termination** | None |
| **Base Indicator** | Rigid |
| **Bearing Grease Type** | Polyrex EM (-20F +300F) |
| **Blower** | None |
| **Current @ Voltage** | .850 A @ 460.0 V |
| | 1.500 A @ 208.0 V |
| | 1.700 A @ 230.0 V |
| **Design Code** | B |
| **Drip Cover** | No Drip Cover |
| **Duty Rating** | CONT |
| **Efficiency @ 100% Load** | 75.5 % |
| **Electrically Isolated Bearing** | Not Electrically Isolated |
| **Feedback Device** | NO FEEDBACK |
| **Front Shaft Indicator** | None |
| **Heater Indicator** | No Heater |
| **High Voltage Full Load Amps** | 0.9 a |

## Part Detail

| | |
|---|---|
| **Revision** | E |
| **Type** | AC |
| **Mech. spec.** | 35T995 |
| **Base** | |
| **Status** | PRD/A |
| **Elec. spec.** | 35WGG155 |
| **Layout** | 35LYT995 |
| **Eff. date** | 09-30-2025 |
| **CD Diagram** | CD0005 |
| **Poles** | 04 |
| **Leads** | 9#18 |
| **Proprietary** | False |
| **Created date** | 01-10-2022 |

| | |
|---|---|
| **Insulation Class** | F |
| **Inverter Code** | Inverter Duty |
| **KVA Code** | S |
| **Lifting Lugs** | No Lifting Lugs |
| **Locked Bearing Indicator** | Locked Bearing |
| **Max Speed** | 6000 rpm |
| **Motor Lead Quantity/Wire Size** | 9 @ 18 AWG |
| **Motor Lead Termination** | Flying Leads |
| **Motor Standards** | NEMA |
| **Motor Type** | 3512M |
| **Mounting Arrangement** | F1 |
| **Number of Poles** | 4 |
| **Overall Length** | 13.84 IN |
| **Power Factor** | 49 |
| **Product Family** | General Purpose |
| **Pulley End Bearing Type** | Ball |
| **Pulley Face Code** | C-Face |
| **Pulley Shaft Indicator** | Standard |
| **Rodent Screen** | None |
| **Service Factor** | 1.00 |
| **Shaft Diameter** | 0.625 IN |
| **Shaft Ground Indicator** | No Shaft Grounding |
| **Shaft Rotation** | Reversible |
| **Shaft Slinger Indicator** | No Slinger |
| **Speed** | 1780 rpm |
| **Speed Code** | Single Speed |
| **Starting Method** | Direct on line |
| **Thermal Device - Bearing** | None |
| **Thermal Device - Winding** | Normally Closed Thermostat |
| **Vibration Sensor Indicator** | No Vibration Sensor |
| **Winding Thermal 1** | None |
| **Winding Thermal 2** | None |

**Nameplate**

| NP3301L | | | | | |
|---|---|---|---|---|---|
| **CAT NO** | IDVSNM3534 | | | | |
| **SPEC.** | 35T995G155G3 | | | | |
| **FRAME** | 56C | **HP** | .33 TE | | |
| **VOLTS** | 230/460 | | | | |
| **MAG CUR** | 1.58/.79 | **FLA** | 1.7/.85 | | |
| **RPM** | 1780 | **RPM MAX** | 6000 | | |
| **HZ** | 60 | **PH** | 3 | **CLASS** | F |
| **SER.F.** | 1.00 | **SL HZ** | 1 | | |
| **NEMA-NOM-EFF** | 75.5 | **WK2** | 0.087 | | |
| **RATING** | 40C AMB-CONT | | | | |
| **DE BRG** | 6205 | **ODE BRG** | 6203 | | |
| **CC** | | **SN** | | | |
| | 1000:1 CT/VT | | | | |

**AC Induction Motor Performance Data**
Record # 82226
Typical performance - not guaranteed values

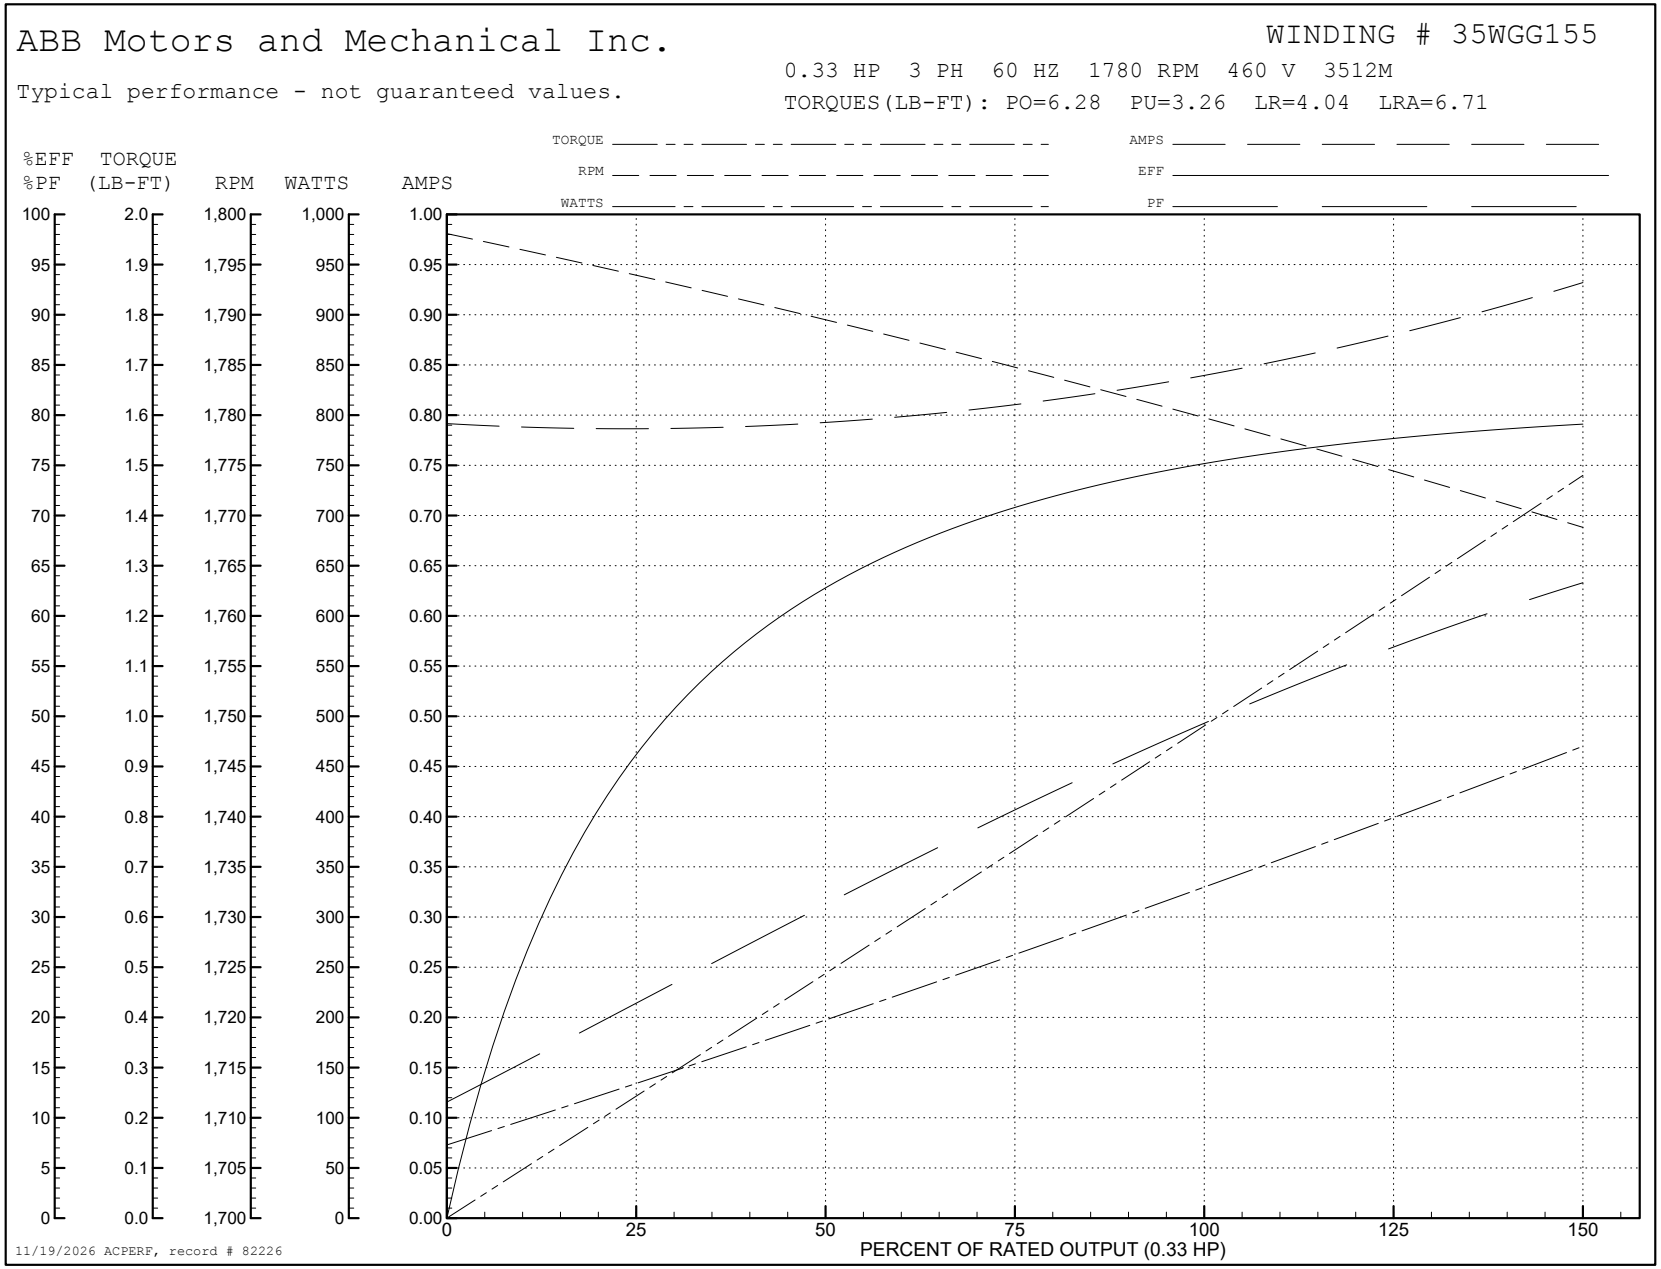
| **Winding:** 35WGG155-R018 | **Type:** 3512M | **Enclosure:** TENV |
|---|---|---|

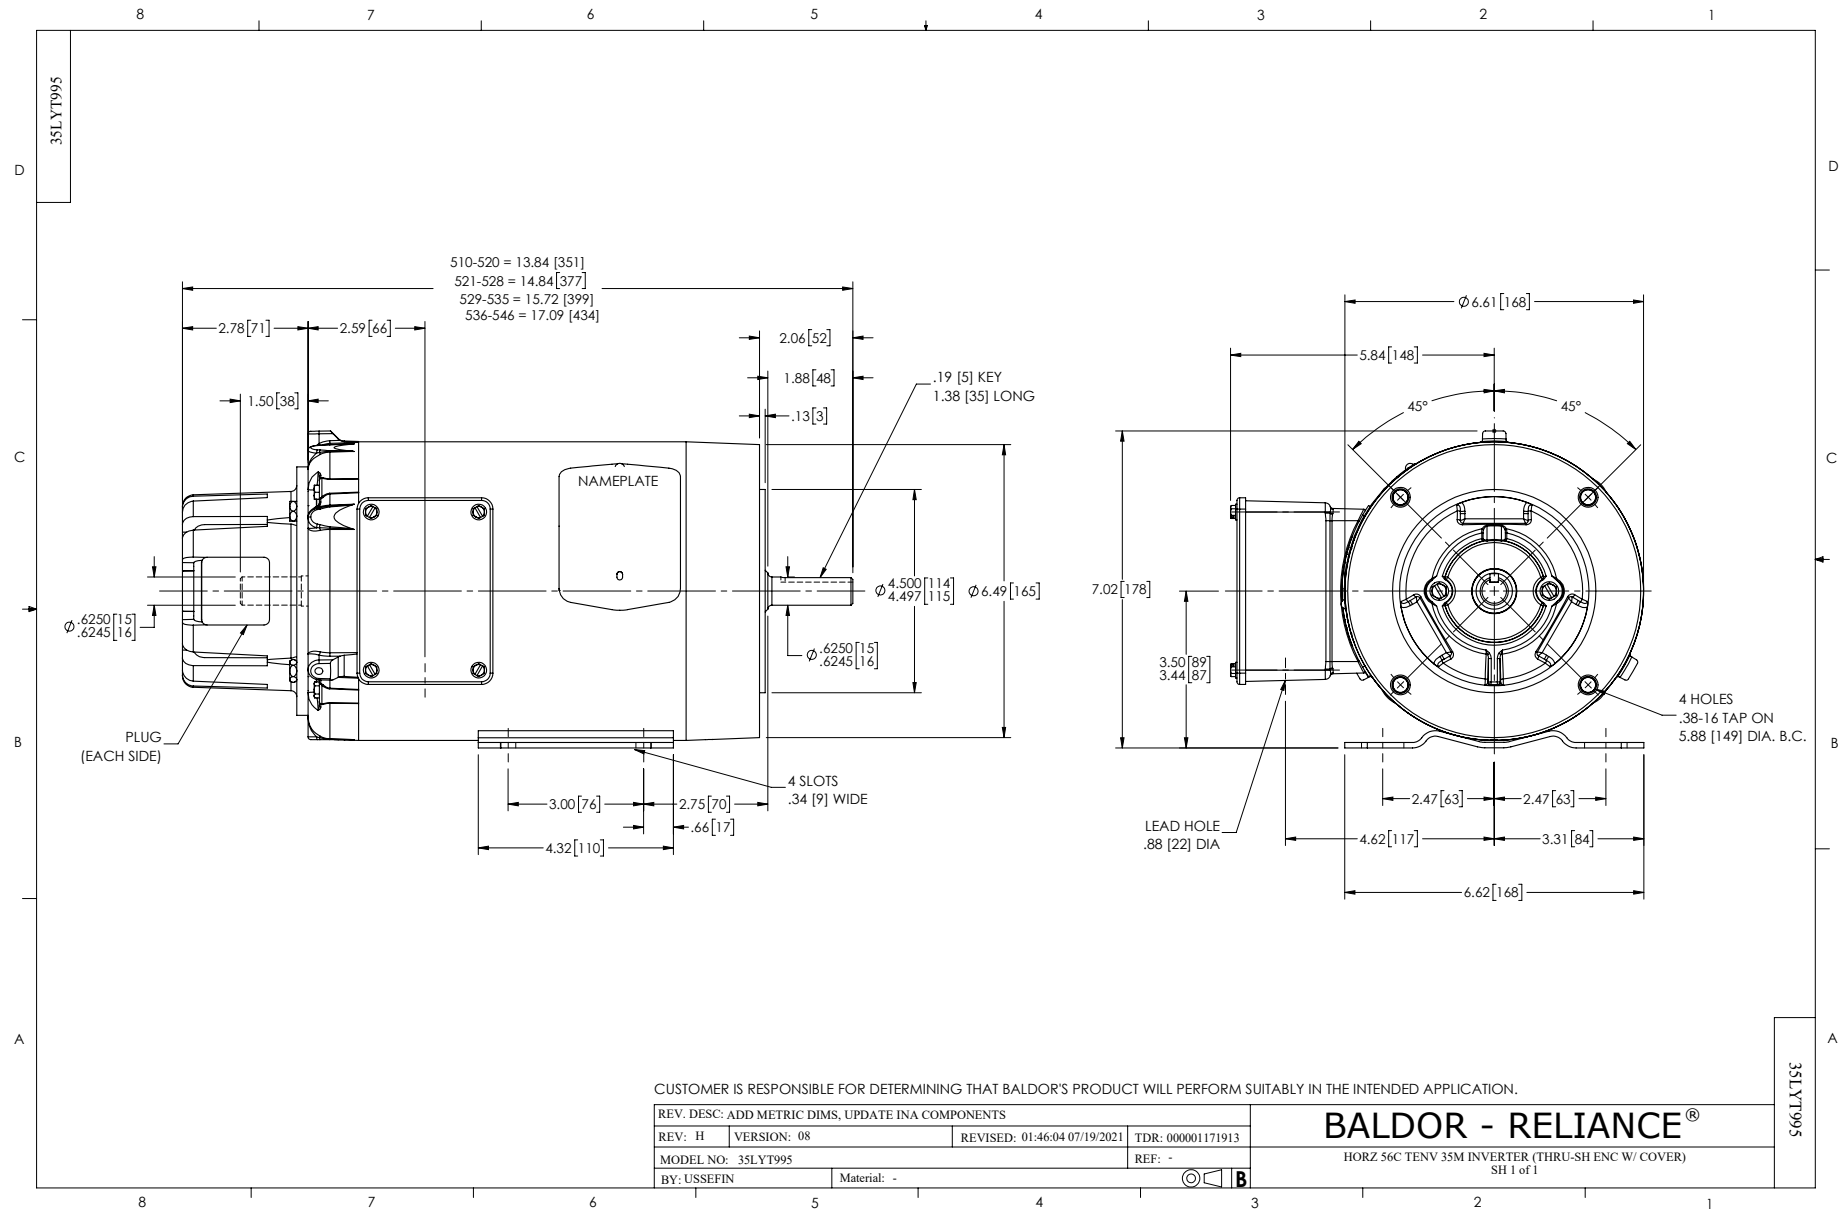
| **Nameplate Data** | | | |
|---|---|---|---|
| **Rated Output (HP)** | | | .33 |
| **Volts** | | | 230/460 |
| **Full Load Amps** | | | 1.7/.85 |
| **R.P.M.** | | | 1780 |
| **Hz** | 60 | **Phase** | 3 |
| **NEMA Design Code** | B | **KVA Code** | S |
| **Service Factor (S.F.)** | | | 1 |
| **NEMA Nom. Eff.** | 75.5 | **Power Factor** | 49 |
| **Rating - Duty** | | | 40C AMB-CONT |

| **460 V, 60 Hz: High Voltage Connection** | |
|---|---|
| **Full Load Torque** | 0.977 LB-FT |
| **Start Configuration** | direct on line |
| **Breakdown Torque** | 6.28 LB-FT |
| **Pull-up Torque** | 3.26 LB-FT |
| **Locked-rotor Torque** | 4.04 LB-FT |
| **Starting Current** | 6.71 A |
| **No-load Current** | 0.792 A |
| **Line-line Res. @ 25ºC** | 43.2 Ω |
| **Temp. Rise @ Rated Load** | 49°C |
| **Locked-rotor Power Factor** | 70.8 |
| **Rotor inertia** | 0.0866 lb-ft² |

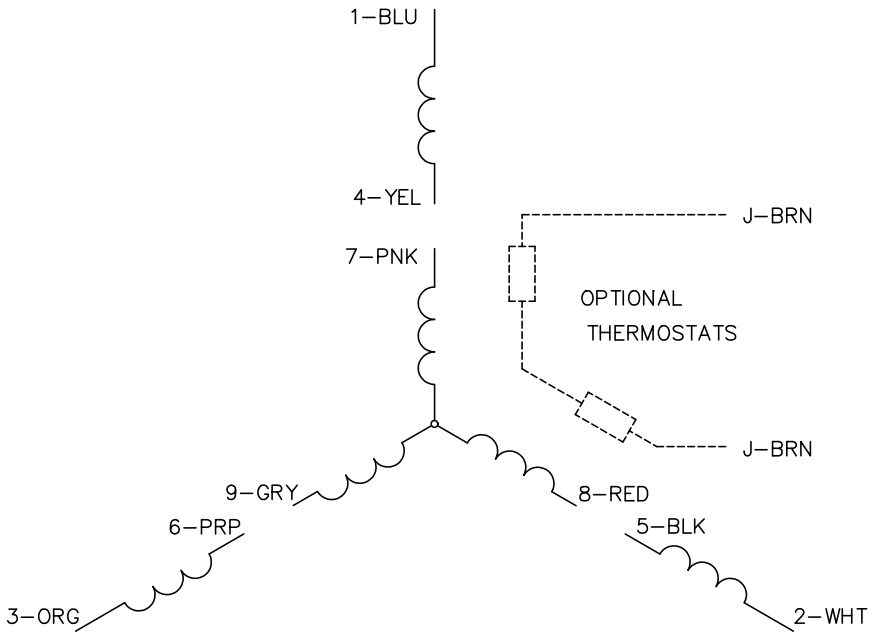
**Load Characteristics 460 V, 60 Hz, 0.33 HP**

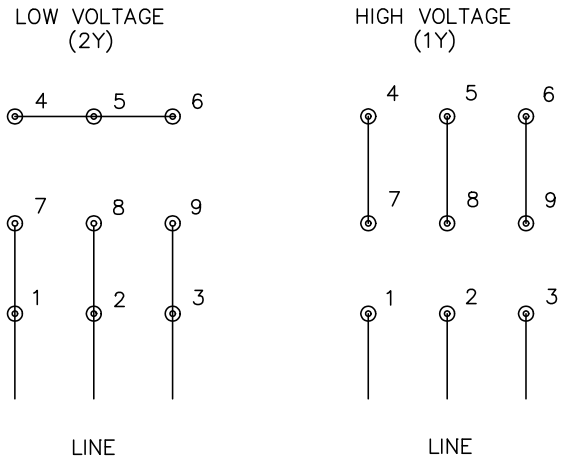
| **% of Rated Load** | **25** | **50** | **75** | **100** | **125** | **150** |
|---|---|---|---|---|---|---|
| **Power Factor** | 22 | 31 | 41 | 49 | 57 | 63 |
| **Efficiency** | 47.4 | 63.1 | 70.8 | 75.1 | 77.6 | 79.1 |
| **Speed** | 1794 | 1789 | 1785 | 1780 | 1774 | 1769 |
| **Line amperes** | 0.786 | 0.791 | 0.814 | 0.839 | 0.878 | 0.933 |


ABB Motors and Mechanical Inc.
WINDING # 35WGG155
0.33 HP 3 PH 60 HZ 1780 RPM 460 V 3512M
Typical performance - not guaranteed values.
TORQUES(LB-FT): PO=6.28 PU=3.26 LR=4.04 LRA=6.71
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (0.33 HP)
11/19/2026 ACPERF, record # 82226


35LYT995
510-520 = 13.84 [351]
521-528 = 14.84[377]
529-535 = 15.72 [399]
536-546 = 17.09 [434]
2.78[71]
2.59[66]
1.50[38]
2.06[52]
1.88[48]
.13[3]
.19 [5] KEY
1.38 [35] LONG
NAMEPLATE
Ø.6250[15]
.6245[16]
Ø4.500[114]
4.497[115]
Ø6.49[165]
PLUG
(EACH SIDE)
4 SLOTS
.34 [9] WIDE
3.00[76]
2.75[70]
.66[17]
4.32[110]
Ø6.61[168]
5.84[148]
45°
45°
7.02[178]
3.50[89]
3.44[87]
4 HOLES
.38-16 TAP ON
5.88 [149] DIA. B.C.
LEAD HOLE
.88 [22] DIA
2.47[63]
2.47[63]
4.62[117]
3.31[84]
6.62[168]
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.
REV. DESC: ADD METRIC DIMS, UPDATE INA COMPONENTS
REV: H
VERSION: 08
REVISED: 01:46:04 07/19/2021
TDR: 000001171913
MODEL NO: 35LYT995
REF: -
BY: USSEFIN
Material: -
B
BALDOR - RELIANCE®
HORZ 56C TENV 35M INVERTER (THRU-SH ENC W/ COVER)
SH 1 of 1
35LYT995

CD0005




NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

| | | | |
|---|---|---|---|
| REV. DESC: REVISE TO SHOW OPTIONAL COLORS | | | BALDOR ELECTRIC Co. |
| REV. LTR: E | BY: JLP | REVISED: 01/19/99 10:15 | TDR: 0171435 |
| CD0005 | | FILE: AAA00005140 | MDL: – |
| | | MTL: – | 3PH, DV, 9 LEADS |