

ABB BALDOR RELIANCE III

Customer information packet

IDXM7144T

5HP, 1750RPM, 3PH, 60HZ, 184TC, X0640M, XPFC

Class - CLI GP D

Division - Division I

Specifications

Enclosure	XPFC
Frame	184TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UL UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	30
Current @ Voltage	13.000 A @ 230.0 V 6.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	AP
Type	AC
Mech. spec.	06J010
Base	
Status	PRD/A
Elec. spec.	06WGW352
Layout	06LYJ010
Eff. date	01-11-2024
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	01-01-0001

Haz Area Temp Code	T2B
Heater Indicator	No Heater
High Voltage Full Load Amps	6.5 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X0640M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.24 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP0890XPSLEV													
NO.							CC	010A					
S/N							TEMP CODE		T2B				
SPEC.	06J010W352G1						INV.TYPE		PWM				
CAT.NO.	IDXM7144T						C HP FR		60	C HP TO		90	
HP	5						CT HZ FROM		30		CT HZ TO 60		
VOLTS	230/460						VT HZ FROM		6		VT HZ TO 60		
AMPS	13/6.5						MAG CUR		6.8/3.4				
RPM	1750						MX RPM		2700				
HZ	60	PH	3	CL	F	NOM.EFF.		89.5					
SER.F.	1.00	DES	B	SL HZ		1.7	WK2	.4					
FRAME	184TC	RATING		40C AMB-CONT									



AC Induction Motor Performance Data

Record # 36475

Typical performance - not guaranteed values

Winding: 06WGW352	Type: 0640M	Enclosure: XPFC
--------------------------	--------------------	------------------------

Nameplate Data				General Characteristics at 460 V, 60 Hz: High Volt Connection	
Rated Output (HP)	5			Full Load Torque	15 LB-FT
Volts	230/460			Start Configuration	DOL
Full Load Amps	13/6.5			Break Down Torque	50 LB-FT
R.P.M.	1750			Pull-Up Torque	30 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	32 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	48 Amps
Service Factor	1			No-load Current	3.4 Amps
NEMA Nom. Eff.	89.5	P.F.	80	Line-line Res. @ 25°C.	2.45 Ohms
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	47°C
S.F. Amps				Temp. Rise @ S.F. Load	


Load Characteristics at 460 Volts, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	40	62	75	81	90	87	
Efficiency	84.1	89.4	90.8	90.2	89.7	88.3	
Speed	1789	1778	1767	1755	1742	1729	
Line Amperes	3.6	4.3	5.2	6.4	7.2	9	


Baldor Electric Company Fort Smith, Arkansas



Catalog	IDXM7144T	NP VOLTS	230/460	ENCLOSURE	XPFC	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)			
FRAME	184TC	NP AMPS	13/6.5	Base Volts	460	R1	1.200	X1	2.786
HP	5 HP	DUTY	Cont	Base AMPS	6.4	R2	0.977	X2	2.177
BASE SPEED	1800	MAX SAFE RPM	2700	Slip Hz	1.50			XM	78.683
PHASE/HZ	3/60	AMB ⁰ C/INSUL	40/F	WK ² (lb-ft ²)	0.372				

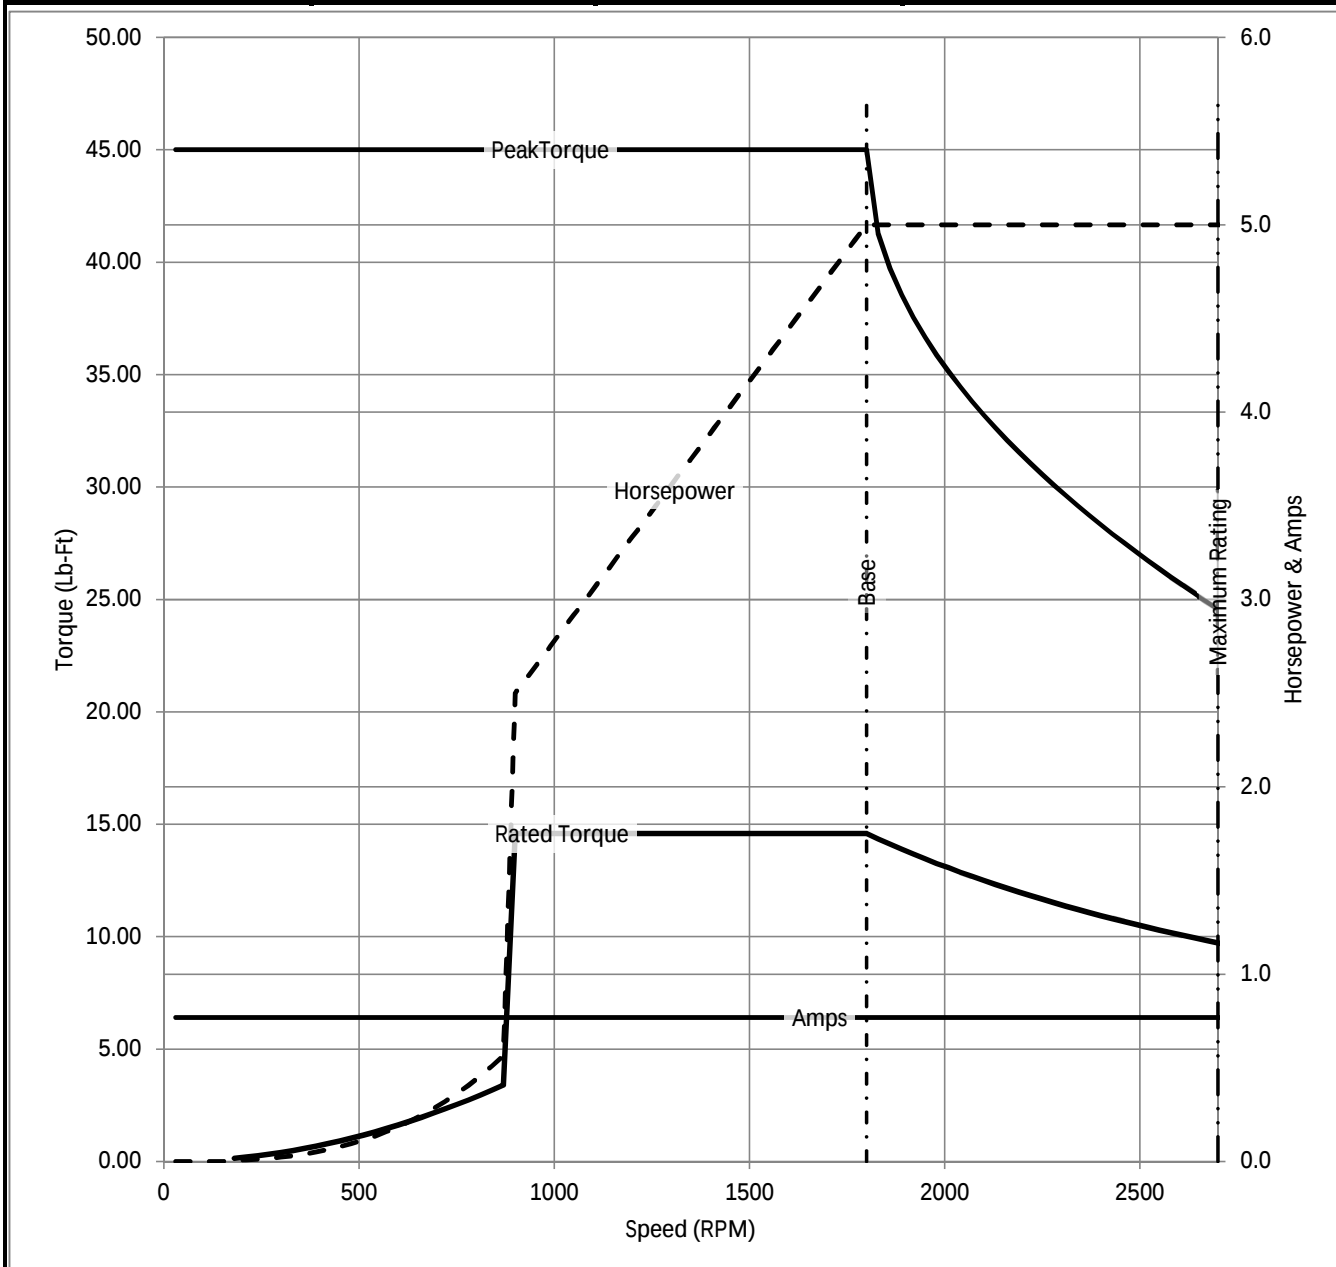

Remarks: Calculated Data

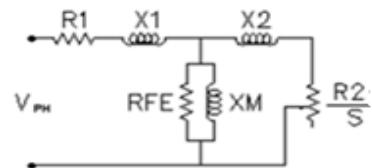

BALDOR
A MEMBER OF THE ABB GROUP

DR BY ENR
CK BY
APP BY ENR
DATE 2/27/2013

A-C MOTOR
PERFORMANCE CURVES

06J010W352G1

ISSUE DATE 2/27/2013

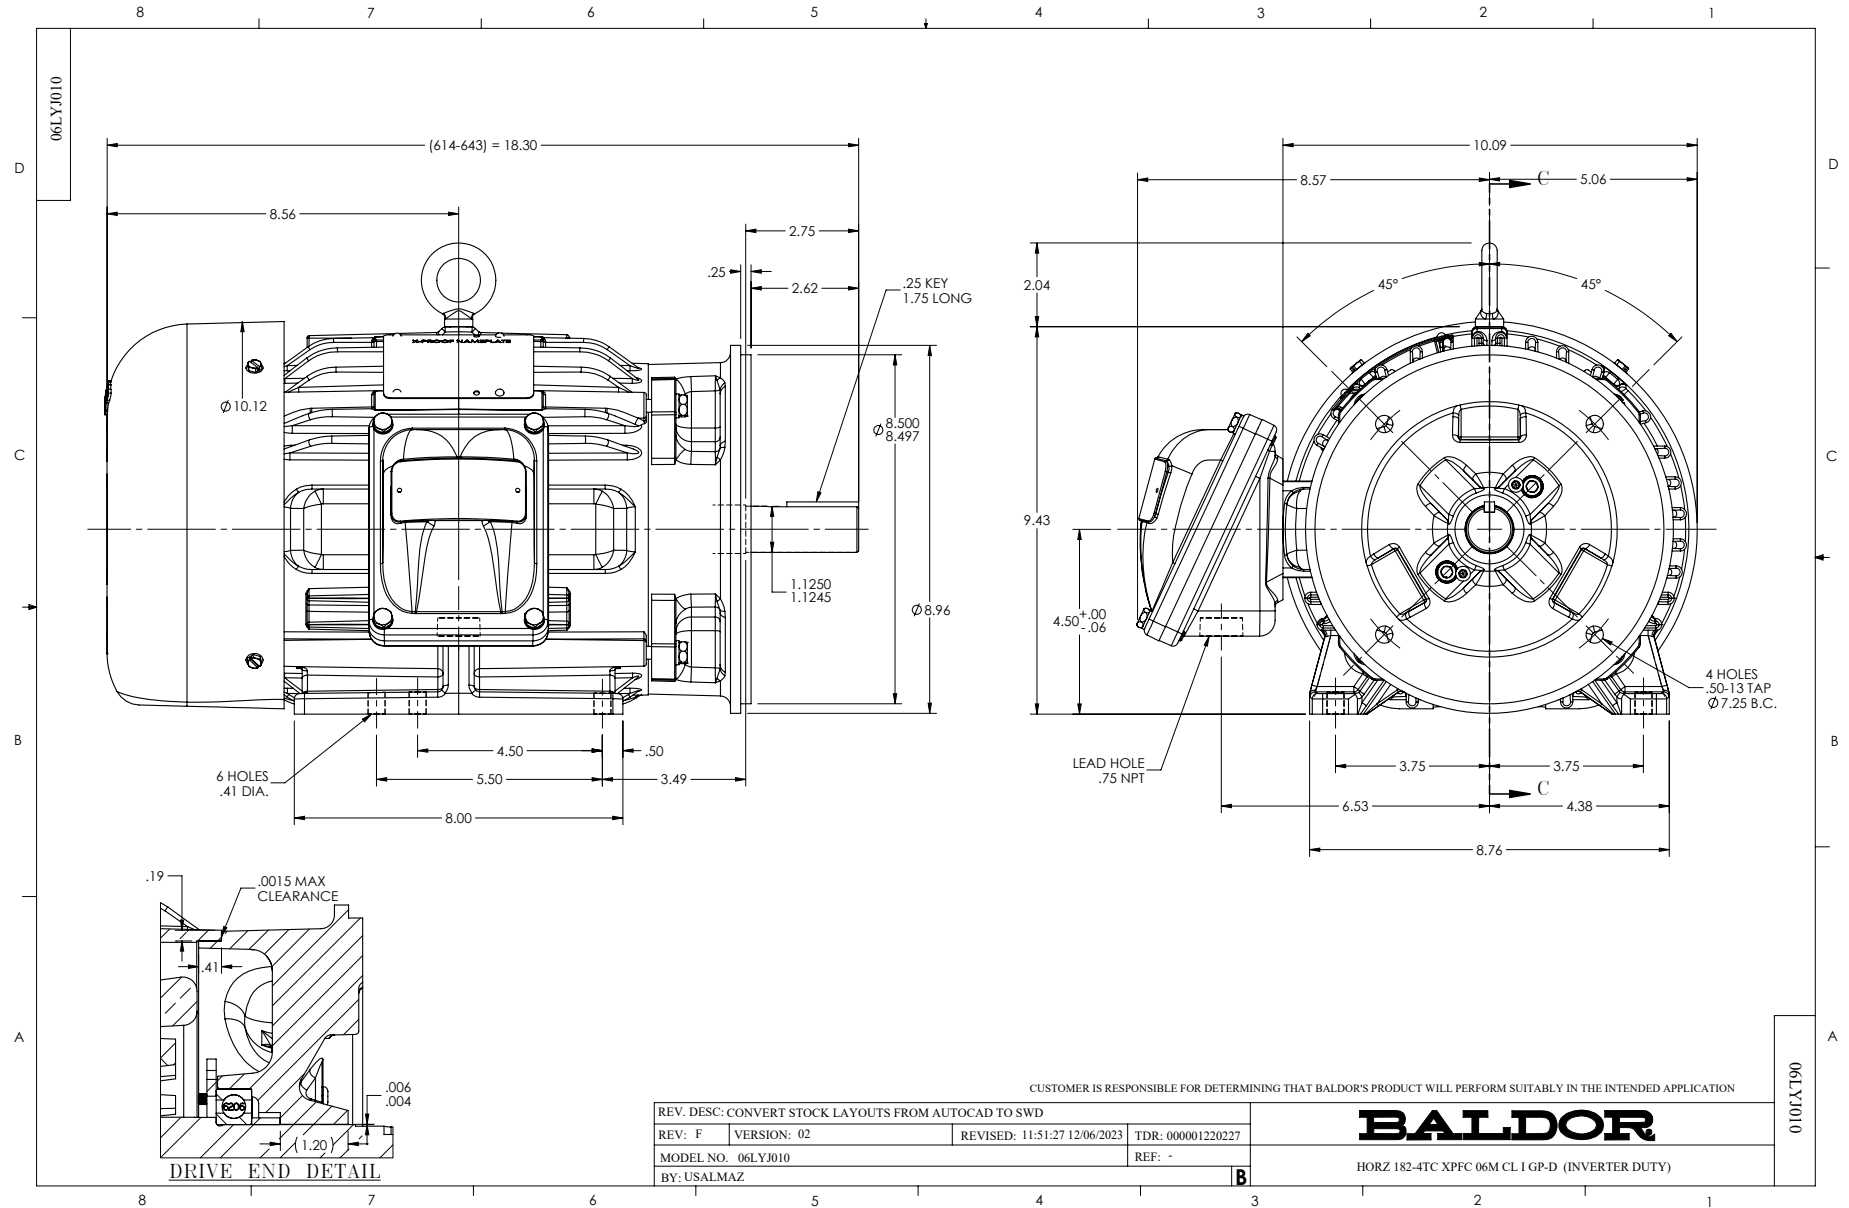

CD0005



- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005