

# ABB BALDOR RELIANCE III

---

## Customer information packet

### JM3112

.75HP, 1725RPM, 3PH, 60HZ, 56J, 3420M, OPEN, F1

Class - None

Division - Not Applicable

**Specifications**

|                                       |                                                             |
|---------------------------------------|-------------------------------------------------------------|
| <b>Enclosure</b>                      | OPEN                                                        |
| <b>Frame</b>                          | 56J                                                         |
| <b>Frame Material</b>                 | Steel                                                       |
| <b>Frequency</b>                      | 60.00 Hz                                                    |
| <b>Haz Area Class and Group</b>       | None                                                        |
| <b>Haz Area Division</b>              | Not Applicable                                              |
| <b>Motor Letter Type</b>              | Three Phase                                                 |
| <b>Output @ Frequency</b>             | .750 HP @ 60 HZ                                             |
| <b>Phase</b>                          | 3                                                           |
| <b>Synchronous Speed @ Frequency</b>  | 1800 RPM @ 60 HZ                                            |
| <b>Voltage @ Frequency</b>            | 208.0 V @ 60 HZ<br>230.0 V @ 60 HZ<br>460.0 V @ 60 HZ       |
| <b>Agency Approvals</b>               | CSA<br>UR                                                   |
| <b>Ambient Temperature</b>            | 40 °C                                                       |
| <b>Auxiliary Box</b>                  | NO AUXILLARY BOX                                            |
| <b>Auxiliary Box Lead Termination</b> | None                                                        |
| <b>Base Indicator</b>                 | No Mounting                                                 |
| <b>Bearing Grease Type</b>            | Polyrex EM (-20F +300F)                                     |
| <b>Blower</b>                         | None                                                        |
| <b>Current @ Voltage</b>              | 3.200 A @ 208.0 V<br>3.000 A @ 230.0 V<br>1.500 A @ 460.0 V |
| <b>Design Code</b>                    | B                                                           |
| <b>Drip Cover</b>                     | Drip Cover                                                  |
| <b>Duty Rating</b>                    | CONT                                                        |
| <b>Efficiency @ 100% Load</b>         | 75.5 %                                                      |
| <b>Electrically Isolated Bearing</b>  | Not Electrically Isolated                                   |
| <b>Feedback Device</b>                | NO FEEDBACK                                                 |
| <b>Front Shaft Indicator</b>          | None                                                        |
| <b>Heater Indicator</b>               | No Heater                                                   |

**Part Detail**

|                     |            |
|---------------------|------------|
| <b>Revision</b>     | F          |
| <b>Type</b>         | AC         |
| <b>Mech. spec.</b>  | 34F038     |
| <b>Base</b>         |            |
| <b>Status</b>       | PRD/A      |
| <b>Elec. spec.</b>  | 34WGR707   |
| <b>Layout</b>       | 34LYF038   |
| <b>Eff. date</b>    | 08-10-2026 |
| <b>CD Diagram</b>   | CD0005     |
| <b>Poles</b>        | 04         |
| <b>Leads</b>        | 9#18       |
| <b>Proprietary</b>  | False      |
| <b>Created date</b> | 01-29-2021 |

|                               |                     |
|-------------------------------|---------------------|
| High Voltage Full Load Amps   | 1.5 a               |
| Insulation Class              | B                   |
| Inverter Code                 | Not Inverter        |
| KVA Code                      | M                   |
| Lifting Lugs                  | No Lifting Lugs     |
| Locked Bearing Indicator      | Locked Bearing      |
| Motor Lead Quantity/Wire Size | 9 @ 18 AWG          |
| Motor Lead Termination        | Flying Leads        |
| Motor Standards               | NEMA                |
| Motor Type                    | 3420M               |
| Mounting Arrangement          | F1                  |
| Number of Poles               | 4                   |
| Overall Length                | 12.34 IN            |
| Power Factor                  | 64                  |
| Product Family                | General Purpose     |
| Pulley End Bearing Type       | Ball                |
| Pulley Face Code              | C-Face              |
| Pulley Shaft Indicator        | Ext Thread          |
| Rodent Screen                 | None                |
| Service Factor                | 1.25                |
| Shaft Diameter                | 0.625 IN            |
| Shaft Ground Indicator        | No Shaft Grounding  |
| Shaft Rotation                | Reversible          |
| Shaft Slinger Indicator       | No Slinger          |
| Speed                         | 1725 rpm            |
| Speed Code                    | Single Speed        |
| Starting Method               | Direct on line      |
| Thermal Device - Bearing      | None                |
| Thermal Device - Winding      | None                |
| Vibration Sensor Indicator    | No Vibration Sensor |
| Winding Thermal 1             | None                |
| Winding Thermal 2             | None                |

**Nameplate**

| NP1256L      |                 |      |     |      |   |  |       |   |  |  |  |
|--------------|-----------------|------|-----|------|---|--|-------|---|--|--|--|
| CAT.NO.      | JM3112          |      |     |      |   |  |       |   |  |  |  |
| SPEC.        | 34F038R707      |      |     |      |   |  |       |   |  |  |  |
| HP           | .75             |      |     |      |   |  |       |   |  |  |  |
| VOLTS        | 208-230/460     |      |     |      |   |  |       |   |  |  |  |
| AMP          | 3.2-3/1.5       |      |     |      |   |  |       |   |  |  |  |
| RPM          | 1725            |      |     |      |   |  |       |   |  |  |  |
| FRAME        | 56J             |      | HZ  | 60   |   |  | PH    | 3 |  |  |  |
| SER.F.       | 1.25            | CODE | M   | DES  | B |  | CLASS | B |  |  |  |
| NEMA-NOM-EFF | 75.5            | PF   | 64  |      |   |  |       |   |  |  |  |
| RATING       | 40C AMB-CONT    |      |     |      |   |  |       |   |  |  |  |
| CC           |                 |      |     |      |   |  |       |   |  |  |  |
| DE           | 6203            |      | ODE | 6203 |   |  |       |   |  |  |  |
| ENCL         | OPEN            | SN   |     |      |   |  |       |   |  |  |  |
|              | SFA 3.6-3.4/1.7 |      |     |      |   |  |       |   |  |  |  |

**AC Induction Motor Performance Data**

Record # 85439

Preliminary Data Sheet

| Winding: 34WGR707-R001 |    |              | Type: 3420M                              |                     | Enclosure: TEFC  |                       |       |      |
|------------------------|----|--------------|------------------------------------------|---------------------|------------------|-----------------------|-------|------|
| Nameplate Data         |    |              | 460 V, 60 Hz:<br>High Voltage Connection |                     |                  |                       |       |      |
| Rated Output (HP)      |    | 0.75         | Full Load Torque                         |                     | 2.27 LB-FT       |                       |       |      |
| Volts                  |    | 208-230/460  | Start Configuration                      |                     | direct on line   |                       |       |      |
| Full Load Amps         |    | 3.2-3.0/1.5  | Breakdown Torque                         |                     | 9.9 LB-FT        |                       |       |      |
| R.P.M.                 |    | 1725         | Pull-up Torque                           |                     | 7.1 LB-FT        |                       |       |      |
| Hz                     | 60 | Phase        | 3                                        | Locked-rotor Torque |                  | 9.2 LB-FT             |       |      |
| NEMA Design Code       |    | B            | KVA Code                                 | M                   | Starting Current |                       | 9.8 A |      |
| Service Factor (S.F.)  |    | 1.25         | No-load Current                          |                     | 1.08 A           |                       |       |      |
| NEMA Nom. Eff.         |    | 77           | Power Factor                             |                     | 61               | Line-line Res. @ 25°C |       | 21 Ω |
| Rating - Duty          |    | 40C-AMB CONT | Temp. Rise @ Rated Load                  |                     | 69°C             |                       |       |      |
| S.F. Amps              |    | 3.6-3.4/1.7  | Temp. Rise @ S.F. Load                   |                     | 83°C             |                       |       |      |
|                        |    |              | Locked-rotor Power Factor                |                     | 59.2             |                       |       |      |
|                        |    |              | Rotor inertia                            |                     | 0.0476 LB-FT2    |                       |       |      |

**Load Characteristics 460 V, 60 Hz, 0.75 HP**

| % of Rated Load | 25   | 50   | 75   | 100  | 125  | 150  | S.F. |
|-----------------|------|------|------|------|------|------|------|
| Power Factor    | 29   | 44   | 56   | 66   | 73   | 79   | 73   |
| Efficiency      | 54.7 | 68.4 | 73.5 | 75.2 | 75.8 | 74.9 | 76.5 |
| Speed           | 1780 | 1763 | 1745 | 1726 | 1723 | 1700 | 1723 |
| Line amperes    | 1.09 | 1.15 | 1.26 | 1.4  | 1.58 | 1.79 | 1.58 |


ABB Motors and Mechanical Inc.

WINDING # 34WGR707


Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 1725 RPM 460 V 3420M

TORQUES (LB-FT) : PO=9.9 PU=7.1 LR=9.2 LRA=9.8

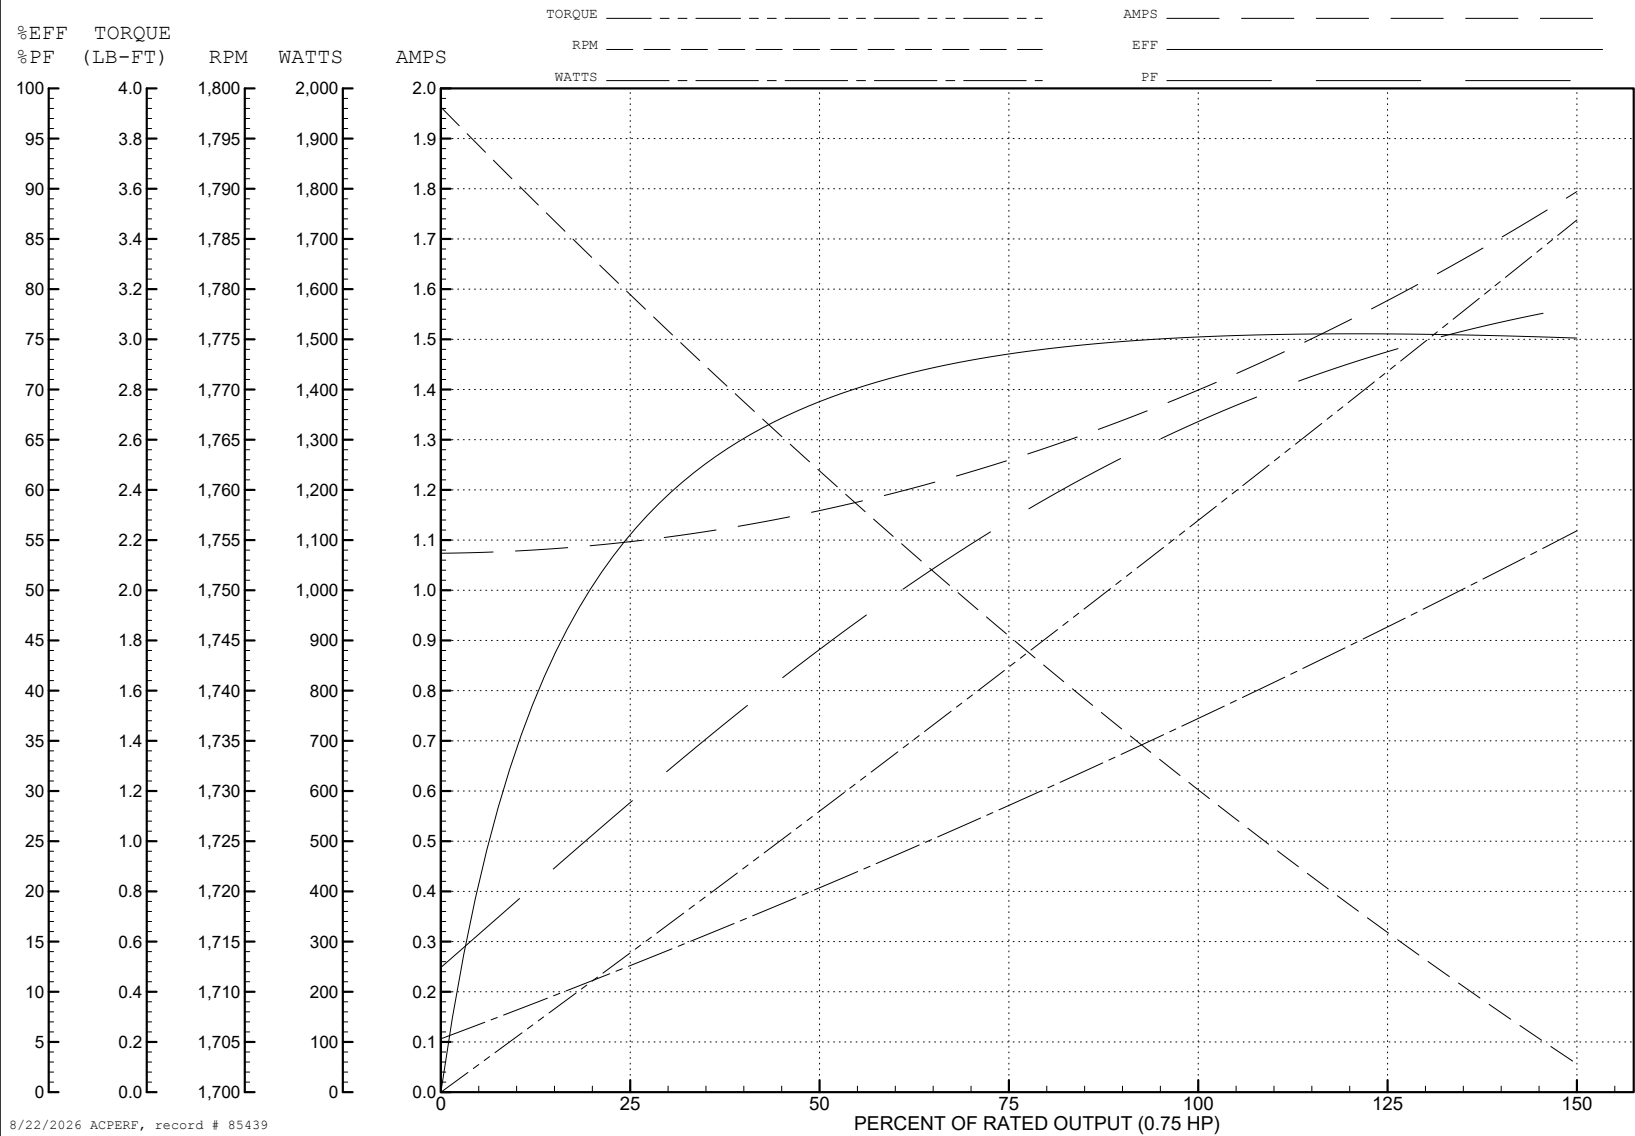

34LYF038

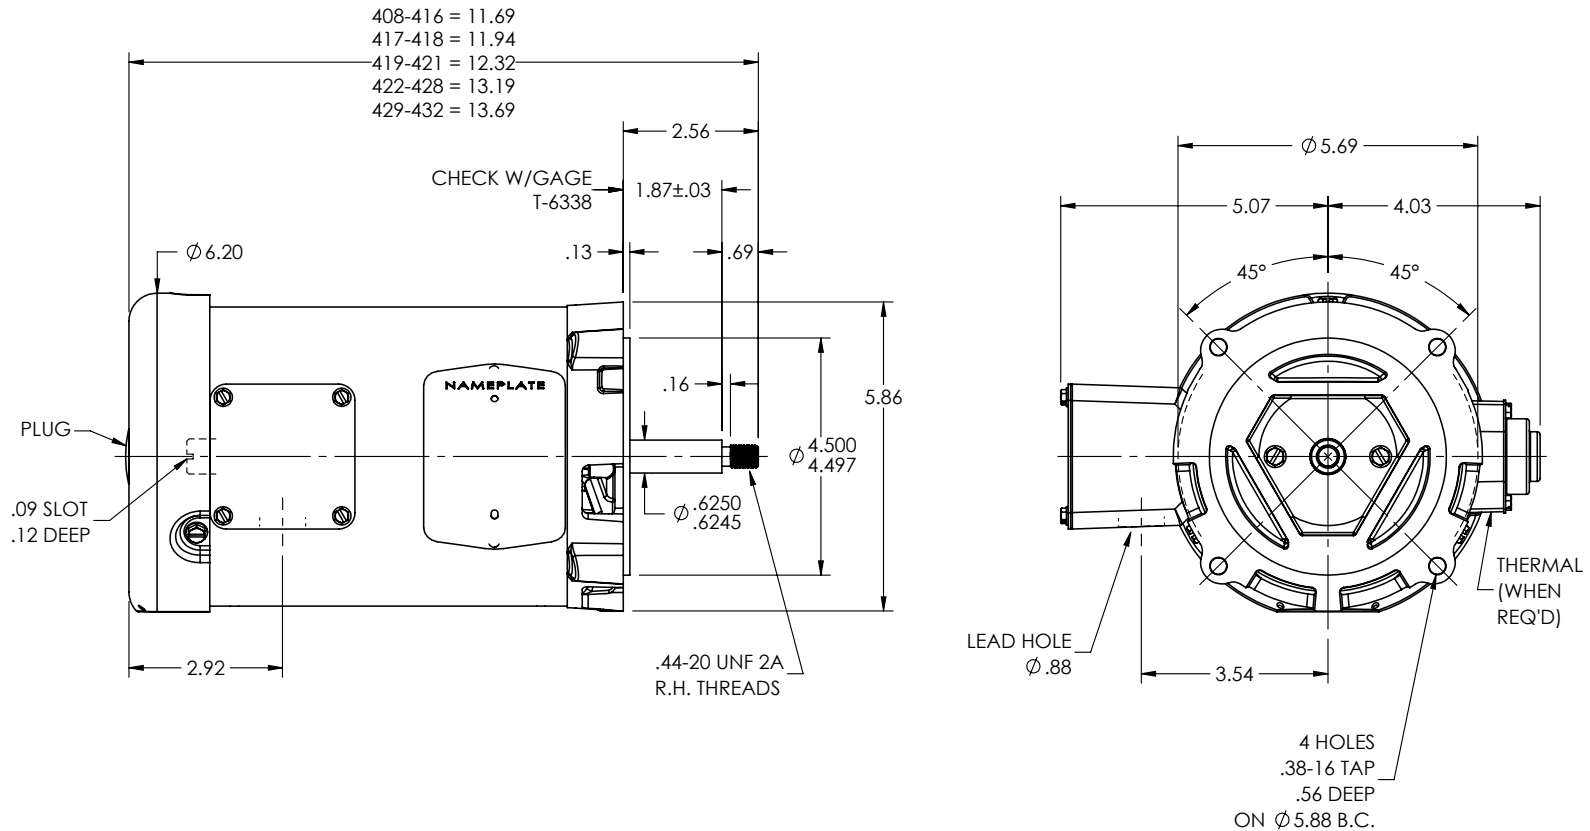

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CHG'D BAND TO 34SB3981, SHAFT TO 34SH3C22

|        |             |                              |                   |
|--------|-------------|------------------------------|-------------------|
| REV: L | VERSION: 04 | REVISED: 08:37:38 07/28/2026 | TDR: 000001281747 |
|--------|-------------|------------------------------|-------------------|

34LYF038

MODEL NO. 34LYF038

BY: ENJEFD0

REF: -

**BALDOR - RELIANCE®**

STD VERT 56J OPEN 34M W/DRIP CVR

34LYF038

