ABB BALDOR RELIANCE

Customer information packet

JMEWDM3615T

5HP, 1750RPM, 3PH, 60HZ, 184JM, 3642M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/1/2026 5:21:46 AM

Specifications

Enclosure	TEFC
Frame	184JM
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.900 A @ 208.0 V
	6.700 A @ 460.0 V
	13.400 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	L
Type	AC
Mech. spec.	36K605
Base	
Status	PRD/A
Elec. spec.	36WGS268
Layout	36LYK605
Eff. date	10-30-2026
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	12-04-2014

Heater Indicator	No Heater
High Voltage Full Load Amps	6.7 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3642M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.55 IN
Power Factor	78
Product Family	Wash Down
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None

Nameplate

NP1669L								
CAT.NO.	JMEWDM3615T							
SPEC.	36K605S268G1							
HP	5							
VOLTS	230/460							
AMP	13.4/6.7							
RPM	1750							
FRAME	184JM	**HZ**	60			**PH**	3	
SER.F.	1.15	**CODE**	J	**DES**	B	**CLASS**	F	
NEMA-NOM-EFF	89.5	**PF**	78					
RATING	40C AMB-CONT							
CC	010A							
DE	6207	**ODE**	6205					
ENCL	TEFC	**SN**						
BLANK	20:1CT, 20:1VT, 1.00SF							

AC Induction Motor Performance Data
Record # 35063
Typical performance - not guaranteed values

Winding: 36WGS268-R016	**Type:** 3642M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			5	**Full Load Torque**	14.9 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			13.4/6.7	**Breakdown Torque**	52.2 LB-FT
R.P.M.			1750	**Pull-up Torque**	31.5 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	34.9 LB-FT
NEMA Design Code	B	**KVA Code**	J	**Starting Current**	49.1 A
Service Factor (S.F.)			1.15	**No-load Current**	3.24 A
NEMA Nom. Eff.	89.5	**Power Factor**	78	**Line-line Res. @ 25ºC**	2.27 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	71°C
S.F. Amps				**Temp. Rise @ S.F. Load**	87°C
				Locked-rotor Power Factor	39.8
				Rotor inertia	0.391 LB-FT2

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	39	60	72	78	83	83	81
Efficiency	85	89.7	90.6	89.6	88.6	87	89
Speed	1789	1776	1762	1750	1733	1714	1740
Line amperes	3.55	4.31	5.43	6.65	7.94	9.64	7.42


ABB Motors and Mechanical Inc.

WINDING # 36WGS268

5 HP 3 PH 60 HZ 1750 RPM 460 V 3642M

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=52.2 PU=31.5 LR=34.9 LRA=49.1

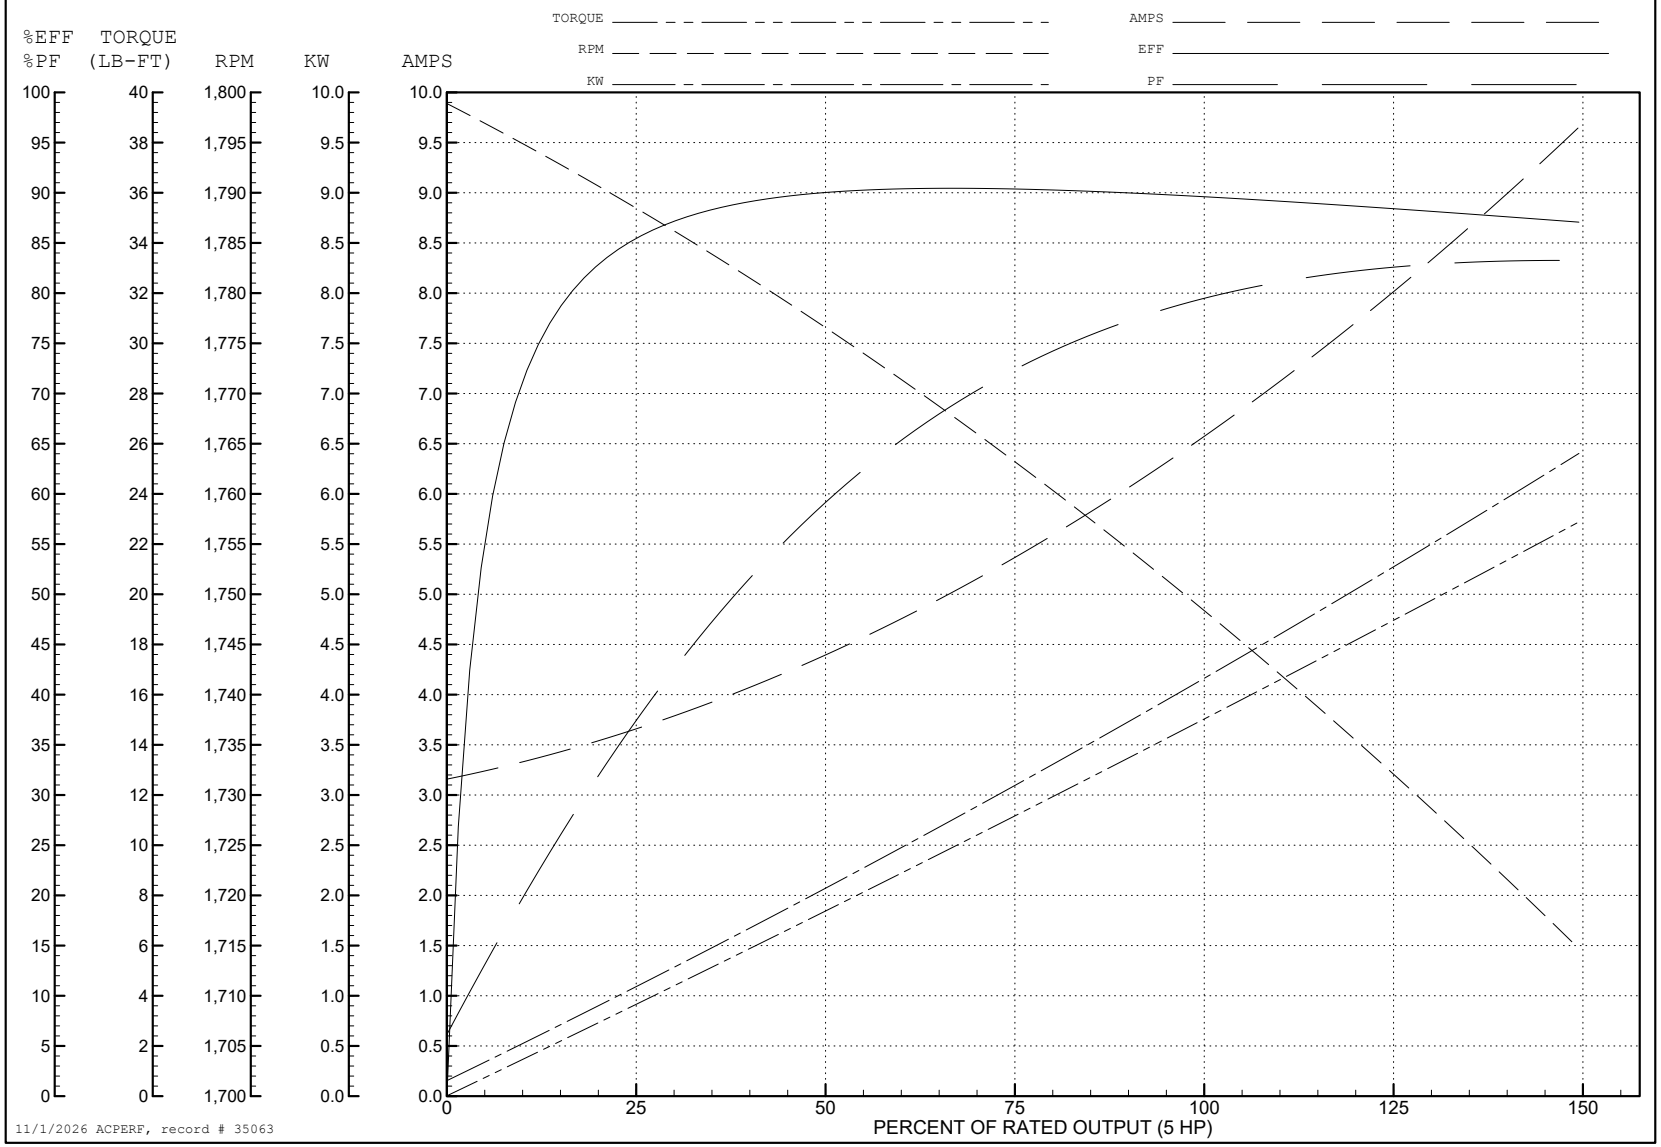

AC Induction Motor Performance Data
Record # 93277
Typical performance - not guaranteed values

Winding: 36WGS268-R016	**Type:** 3642M	**Enclosure:** TEFC

Nameplate Data				**230 V, 60 Hz: Low Voltage Connection**	
Rated Output (HP)			5	**Full Load Torque**	14.9 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			13.4/6.7	**Breakdown Torque**	52.2 LB-FT
R.P.M.			1750	**Pull-up Torque**	31.5 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	34.9 LB-FT
NEMA Design Code	B	**KVA Code**	J	**Starting Current**	98.2 A
Service Factor (S.F.)			1.15	**No-load Current**	6.48 A
NEMA Nom. Eff.	89.5	**Power Factor**	78	**Line-line Res. @ 25ºC**	0.567 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	71°C
S.F. Amps				**Temp. Rise @ S.F. Load**	86°C
				Locked-rotor Power Factor	39.8
				Rotor inertia	0.391 lb-ft²

Load Characteristics 230 V, 60 Hz, 5 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	38	60	72	78	83	83	81
Efficiency	84.9	89.6	90.5	89.6	88.5	87	88.9
Speed	1789	1776	1762	1750	1733	1714	1740
Line amperes	7.1	8.62	10.86	13.3	15.88	19.28	14.8


ABB Motors and Mechanical Inc.


WINDING # 36WGS268

5 HP 3 PH 60 HZ 1750 RPM 230 V 3642M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=52.2 PU=31.5 LR=34.9 LRA=98.2

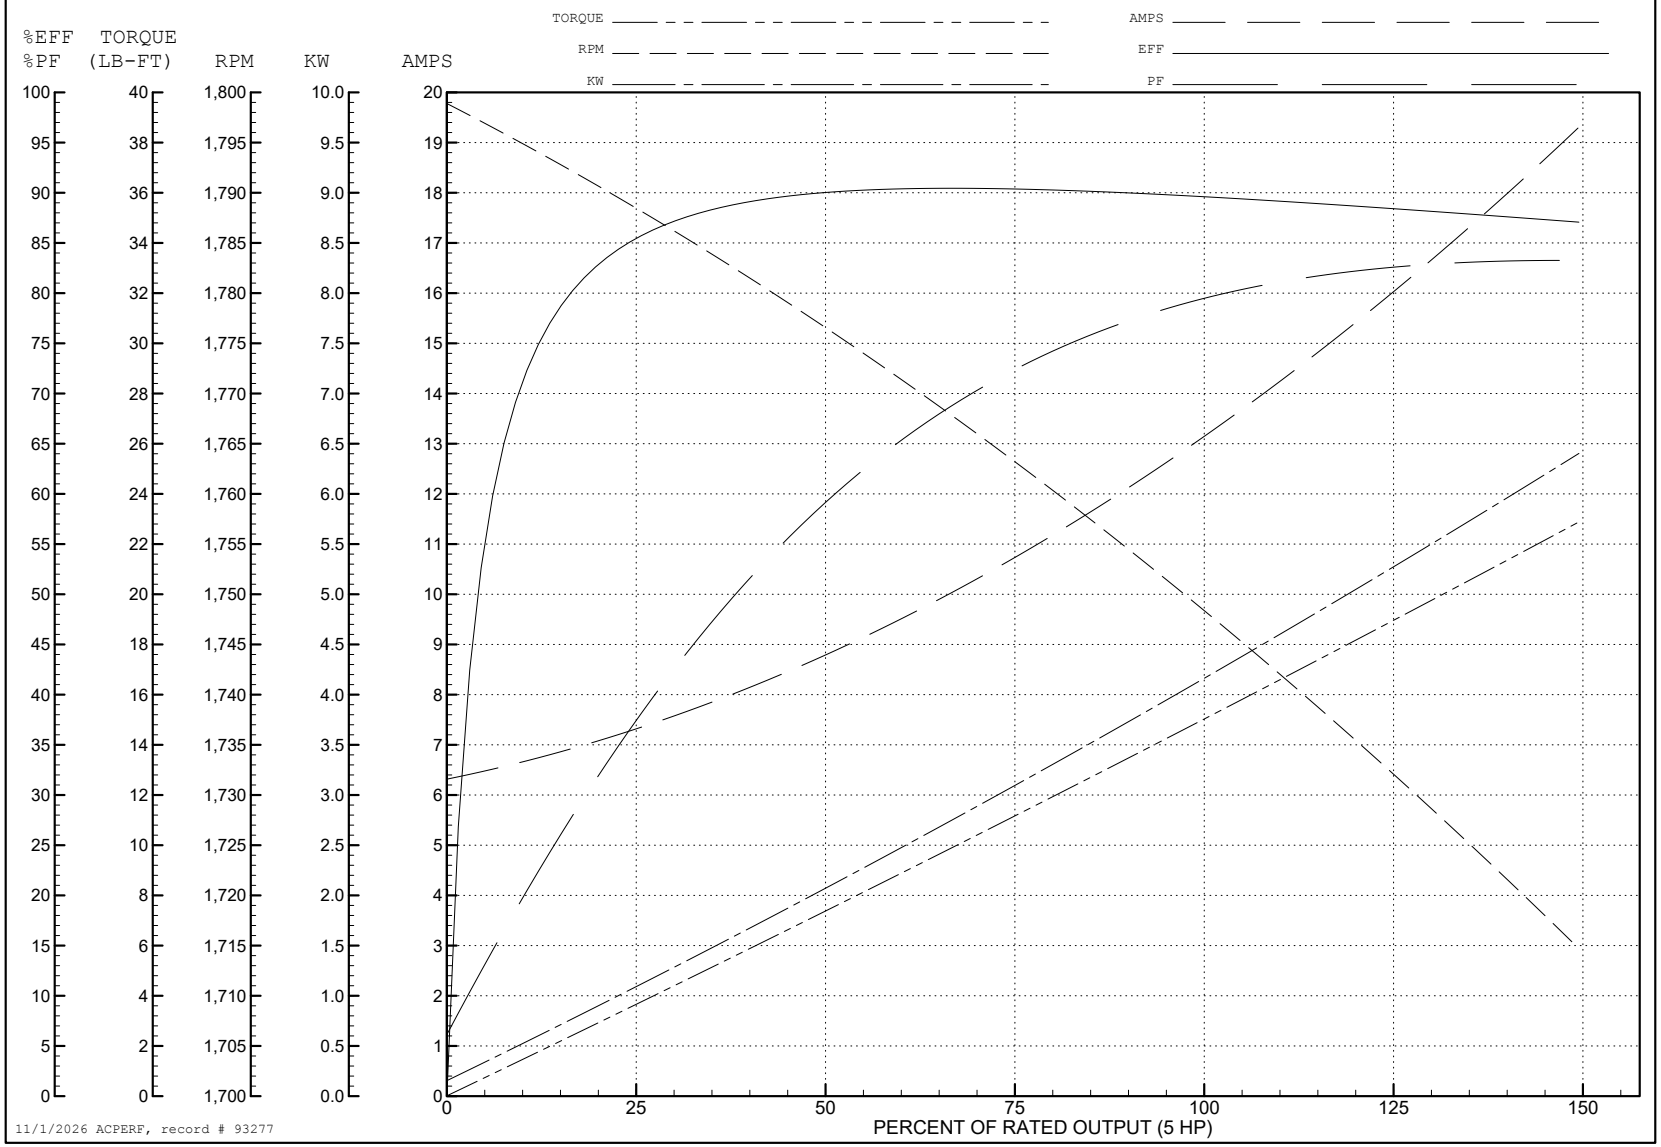

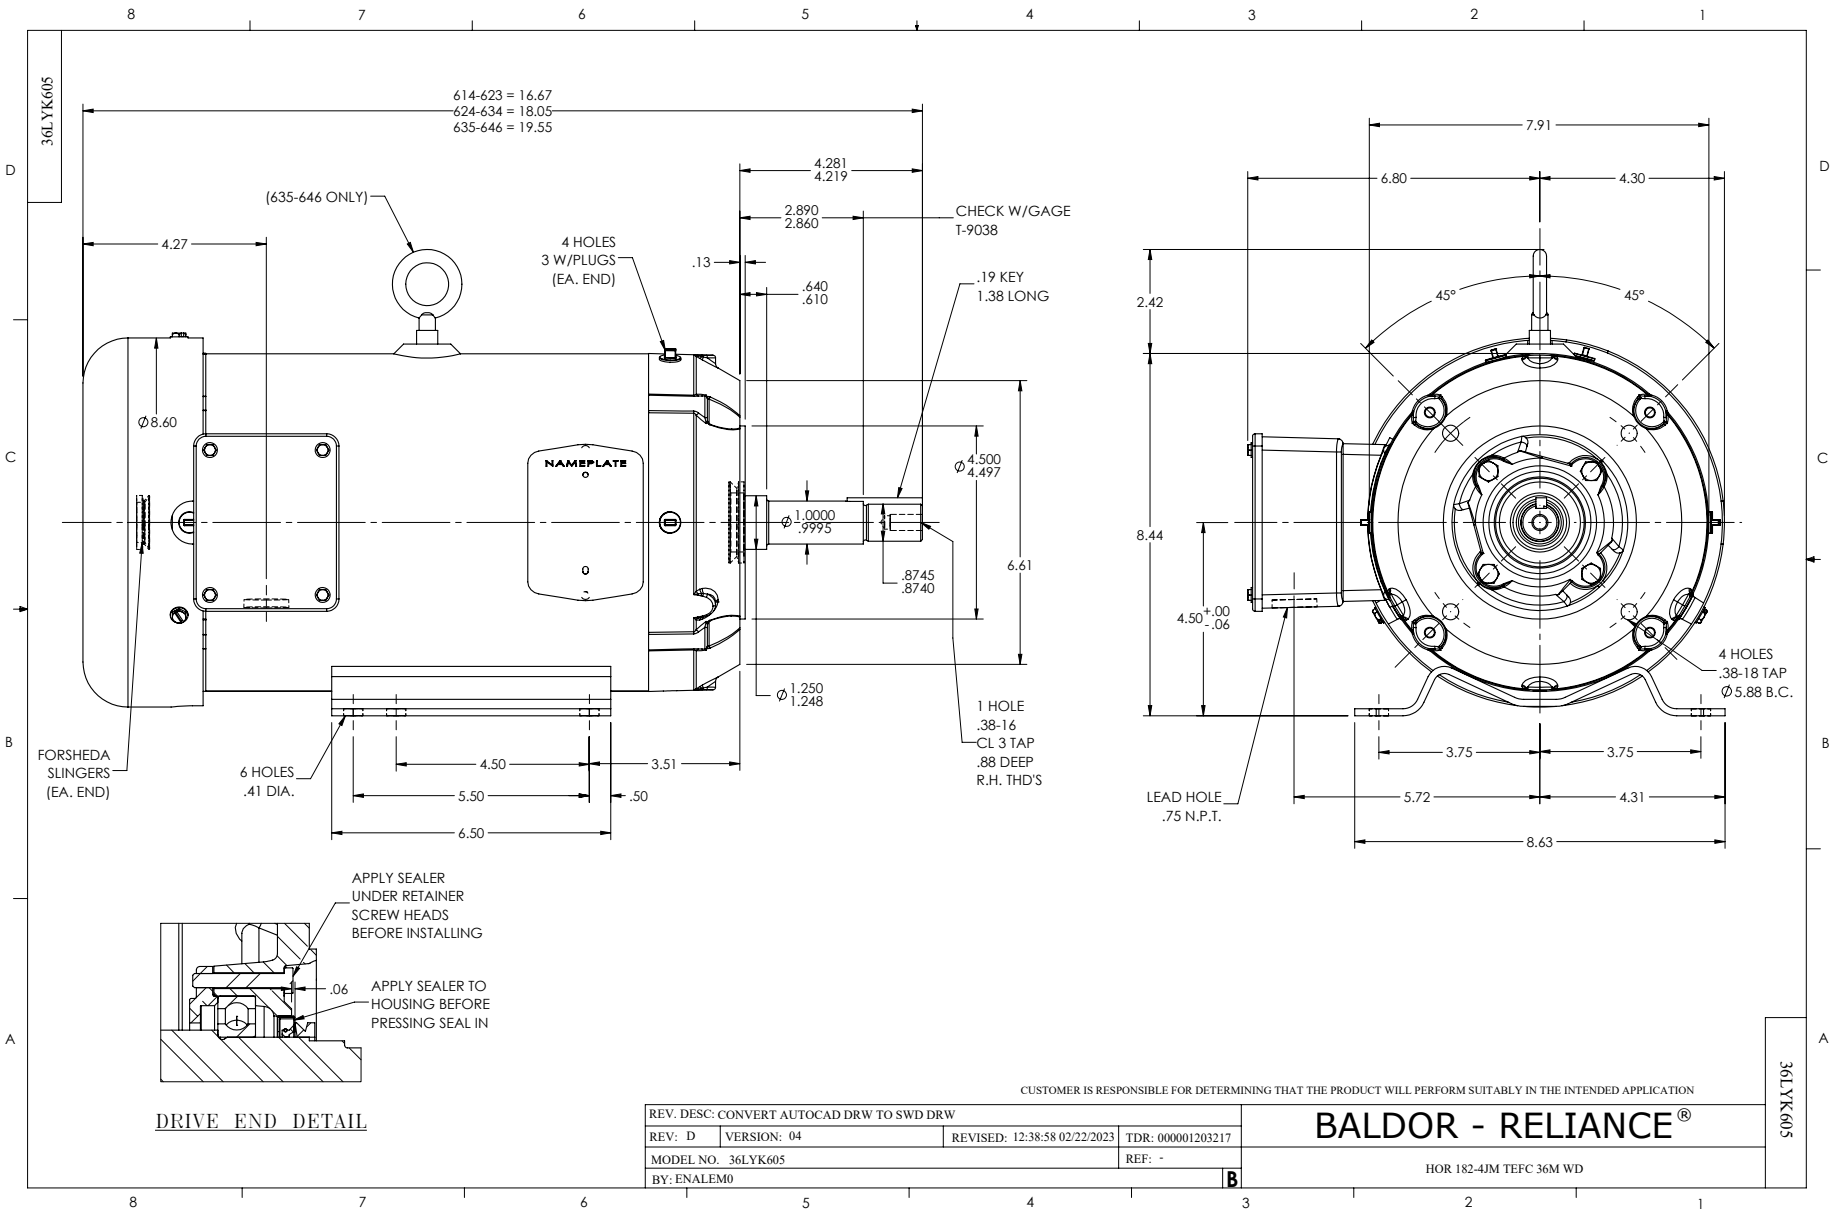
36LYK605
614-623 = 16.67
624-634 = 18.05
635-646 = 19.55
(635-646 ONLY)
4.27
4.281
4.219
2.890
2.860
CHECK W/GAGE
T-9038
4 HOLES
3 W/PLUGS
(EA. END)
.13
.640
.610
.19 KEY
1.38 LONG
Ø8.60
NAMEPLATE
Ø4.500
4.497
Ø1.0000
.9995
.8745
.8740
6.61
Ø1.250
1.248
1 HOLE
.38-16
CL 3 TAP
.88 DEEP
R.H. THD'S
FORSHEDA
SLINGERS
(EA. END)
6 HOLES
.41 DIA.
4.50
3.51
5.50
.50
6.50
7.91
6.80
4.30
2.42
45°
45°
8.44
4.50 +.00 -.06
4 HOLES
.38-18 TAP
Ø5.88 B.C.
3.75
3.75
LEAD HOLE
.75 N.P.T.
5.72
4.31
8.63
APPLY SEALER
UNDER RETAINER
SCREW HEADS
BEFORE INSTALLING
.06
APPLY SEALER TO
HOUSING BEFORE
PRESSING SEAL IN
DRIVE END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT AUTOCAD DRW TO SWD DRW
REV: D
VERSION: 04
REVISED: 12:38:58 02/22/2023
TDR: 000001203217
MODEL NO. 36LYK605
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
HOR 182-4JM TEFC 36M WD
36LYK605

CD0005

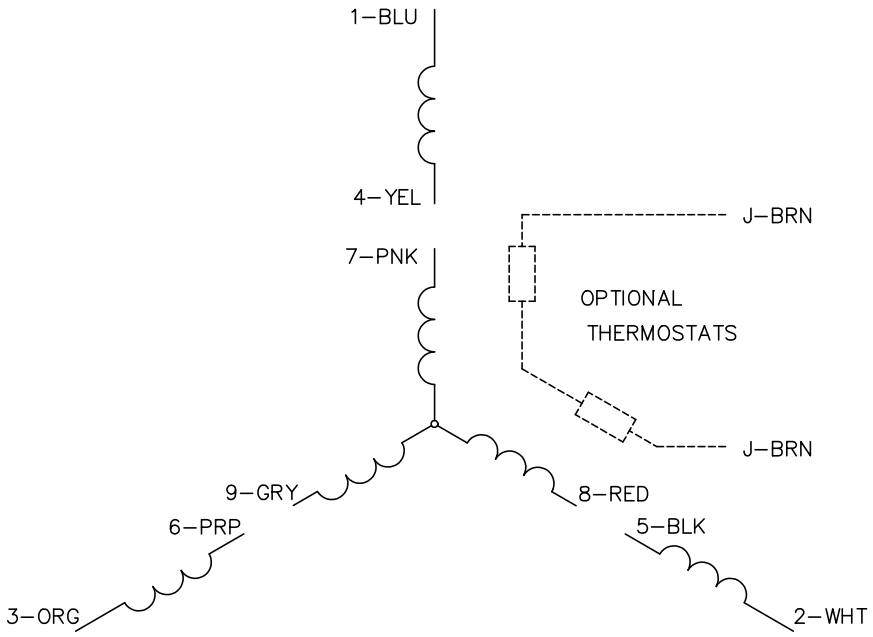

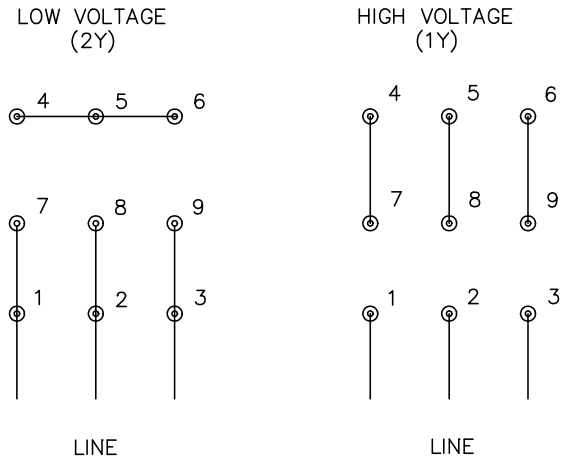

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS