

# **ABB BALDOR RELIANCE III**

---

## **Customer information packet**

JPL1512T

10HP, 1725RPM, 1PH, 60HZ, 215JP, 3744LC, ODTF

Class - None

Division - Not Applicable

**Specifications**

<b>Enclosure</b>	ODTF
<b>Frame</b>	215JP
<b>Frame Material</b>	Steel
<b>Frequency</b>	60.00 Hz
<b>Haz Area Class and Group</b>	None
<b>Haz Area Division</b>	Not Applicable
<b>Motor Letter Type</b>	Cap Start, Cap Run
<b>Output @ Frequency</b>	10.000 HP @ 60 HZ
<b>Phase</b>	1
<b>Synchronous Speed @ Frequency</b>	1800 RPM @ 60 HZ
<b>Voltage @ Frequency</b>	230.0 V @ 60 HZ
<b>Agency Approvals</b>	CSA UR
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	Rigid
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	None
<b>Current @ Voltage</b>	45.000 A @ 208.0 V 41.000 A @ 230.0 V
<b>Design Code</b>	L
<b>Drip Cover</b>	Drip Cover
<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	84.0 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	NO FEEDBACK
<b>Front Face Code</b>	Drip Cover Mounting
<b>Front Shaft Indicator</b>	None
<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	41.0 a
<b>Insulation Class</b>	F

**Part Detail**

<b>Revision</b>	Z
<b>Type</b>	AC
<b>Mech. spec.</b>	37H940
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	37WGY497
<b>Layout</b>	37LYH940
<b>Eff. date</b>	05-13-2024
<b>CD Diagram</b>	CD0086
<b>Poles</b>	04
<b>Leads</b>	2#8 A PH,2#14 B PH
<b>Proprietary</b>	False
<b>Created date</b>	01-01-0001

<b>Inverter Code</b>	Not Inverter
<b>KVA Code</b>	F
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Motor Lead Exit</b>	Ko Box
<b>Motor Lead Quantity/Wire Size</b>	2 @ 8 AWG, A PH
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3744LC
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	20.95 IN
<b>Power Factor</b>	94
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	C-Face
<b>Pulley Shaft Indicator</b>	Tapped & Key
<b>Rodent Screen</b>	Included
<b>Service Factor</b>	1.15
<b>Shaft Diameter</b>	1.250 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	1725 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP1256L</b>										
<b>CAT.NO.</b>	JPL1512T									
<b>SPEC.</b>	37H940Y497									
<b>HP</b>	10									
<b>VOLTS</b>	230									
<b>AMP</b>	41									
<b>RPM</b>	1725									
<b>FRAME</b>	215JP	<b>HZ</b>	60		<b>PH</b>	1				
<b>SER.F.</b>	1.15	<b>CODE</b>	F	<b>DES</b>	L	<b>CLASS</b>	F			
<b>NEMA-NOM-EFF</b>	84	<b>PF</b>	94							
<b>RATING</b>	40C AMB-CONT									
<b>CC</b>										
<b>DE</b>	6309	<b>ODE</b>	6206							
<b>ENCL</b>	ODTF	<b>SN</b>								


ABB Motors and Mechanical Inc.

WINDING # 37WGY497


Typical performance - not guaranteed values.

10 HP 1 PH 60 HZ 1725 RPM 230 V 3744LC


TORQUES (LB-FT): PO=78.7 PU=57.9 LR=69.1 LRA=225

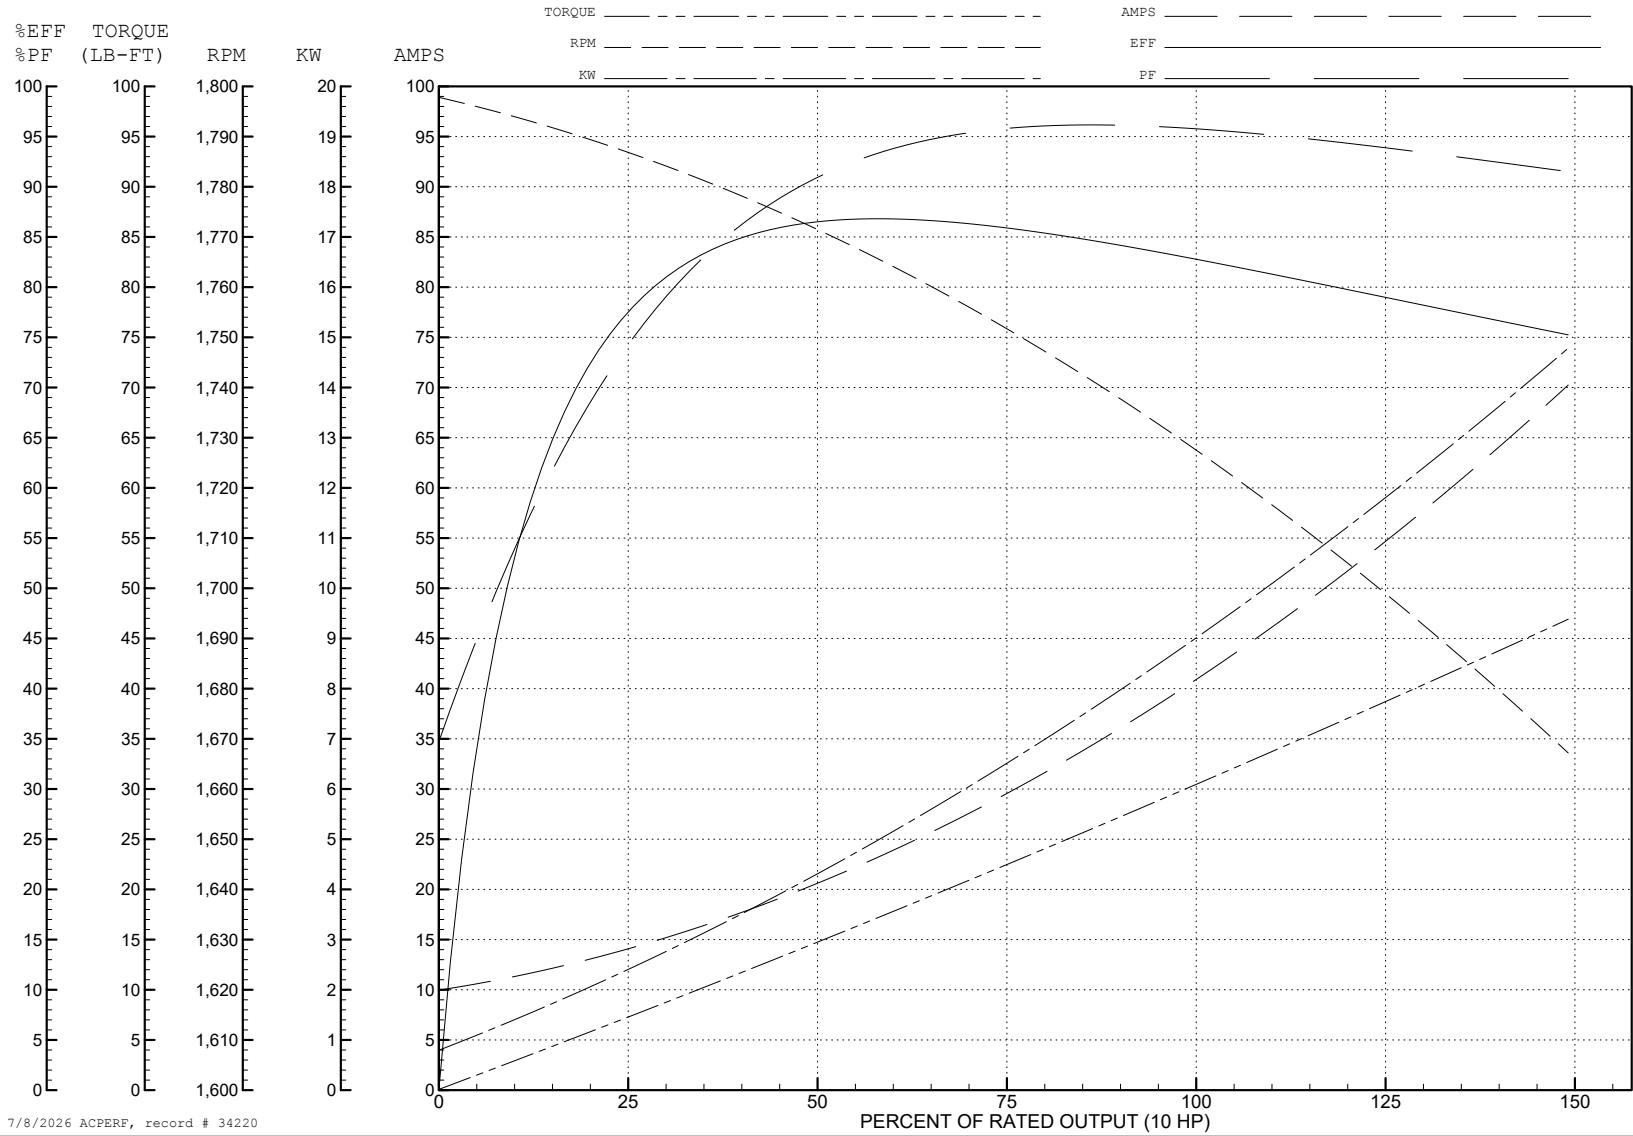

7/8/2026 ACPERF, record # 34220

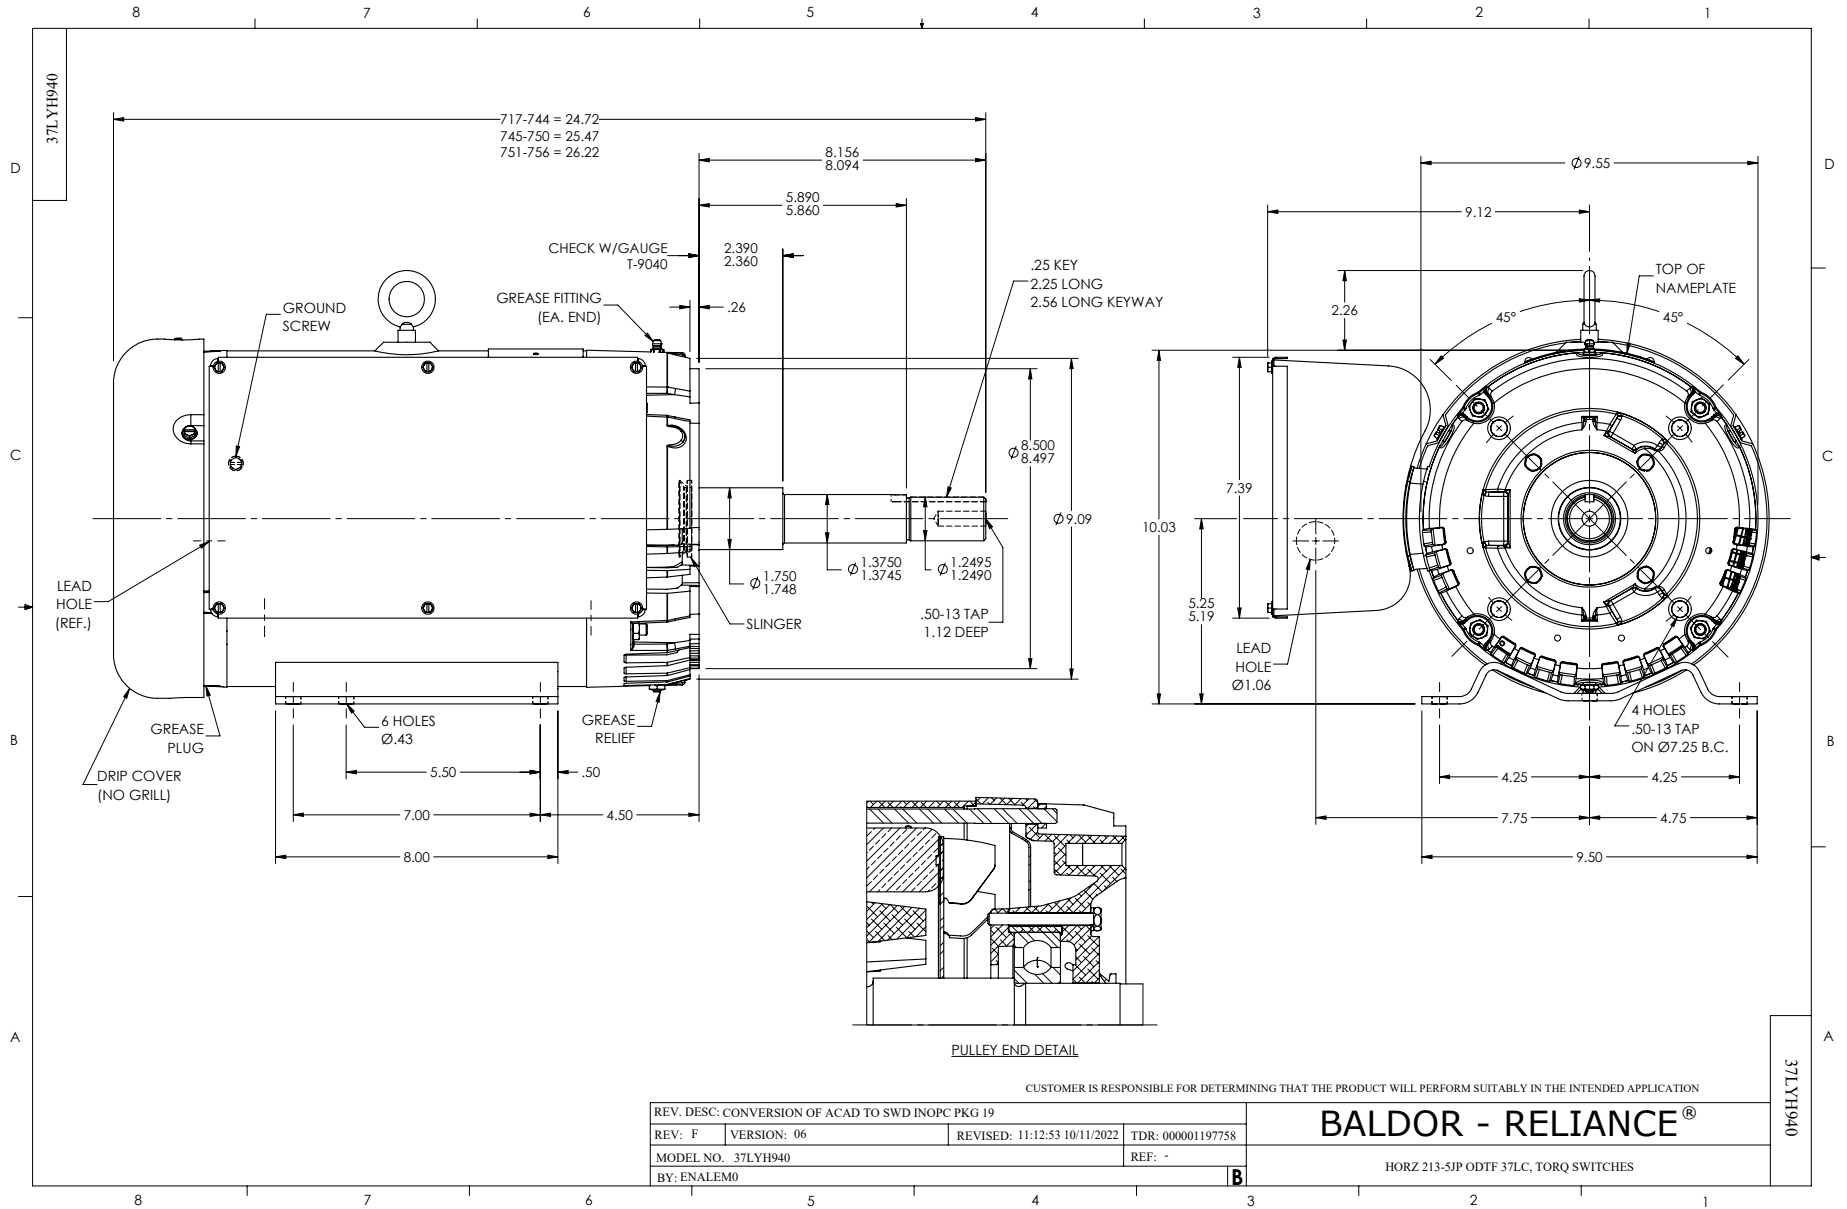

CD0086

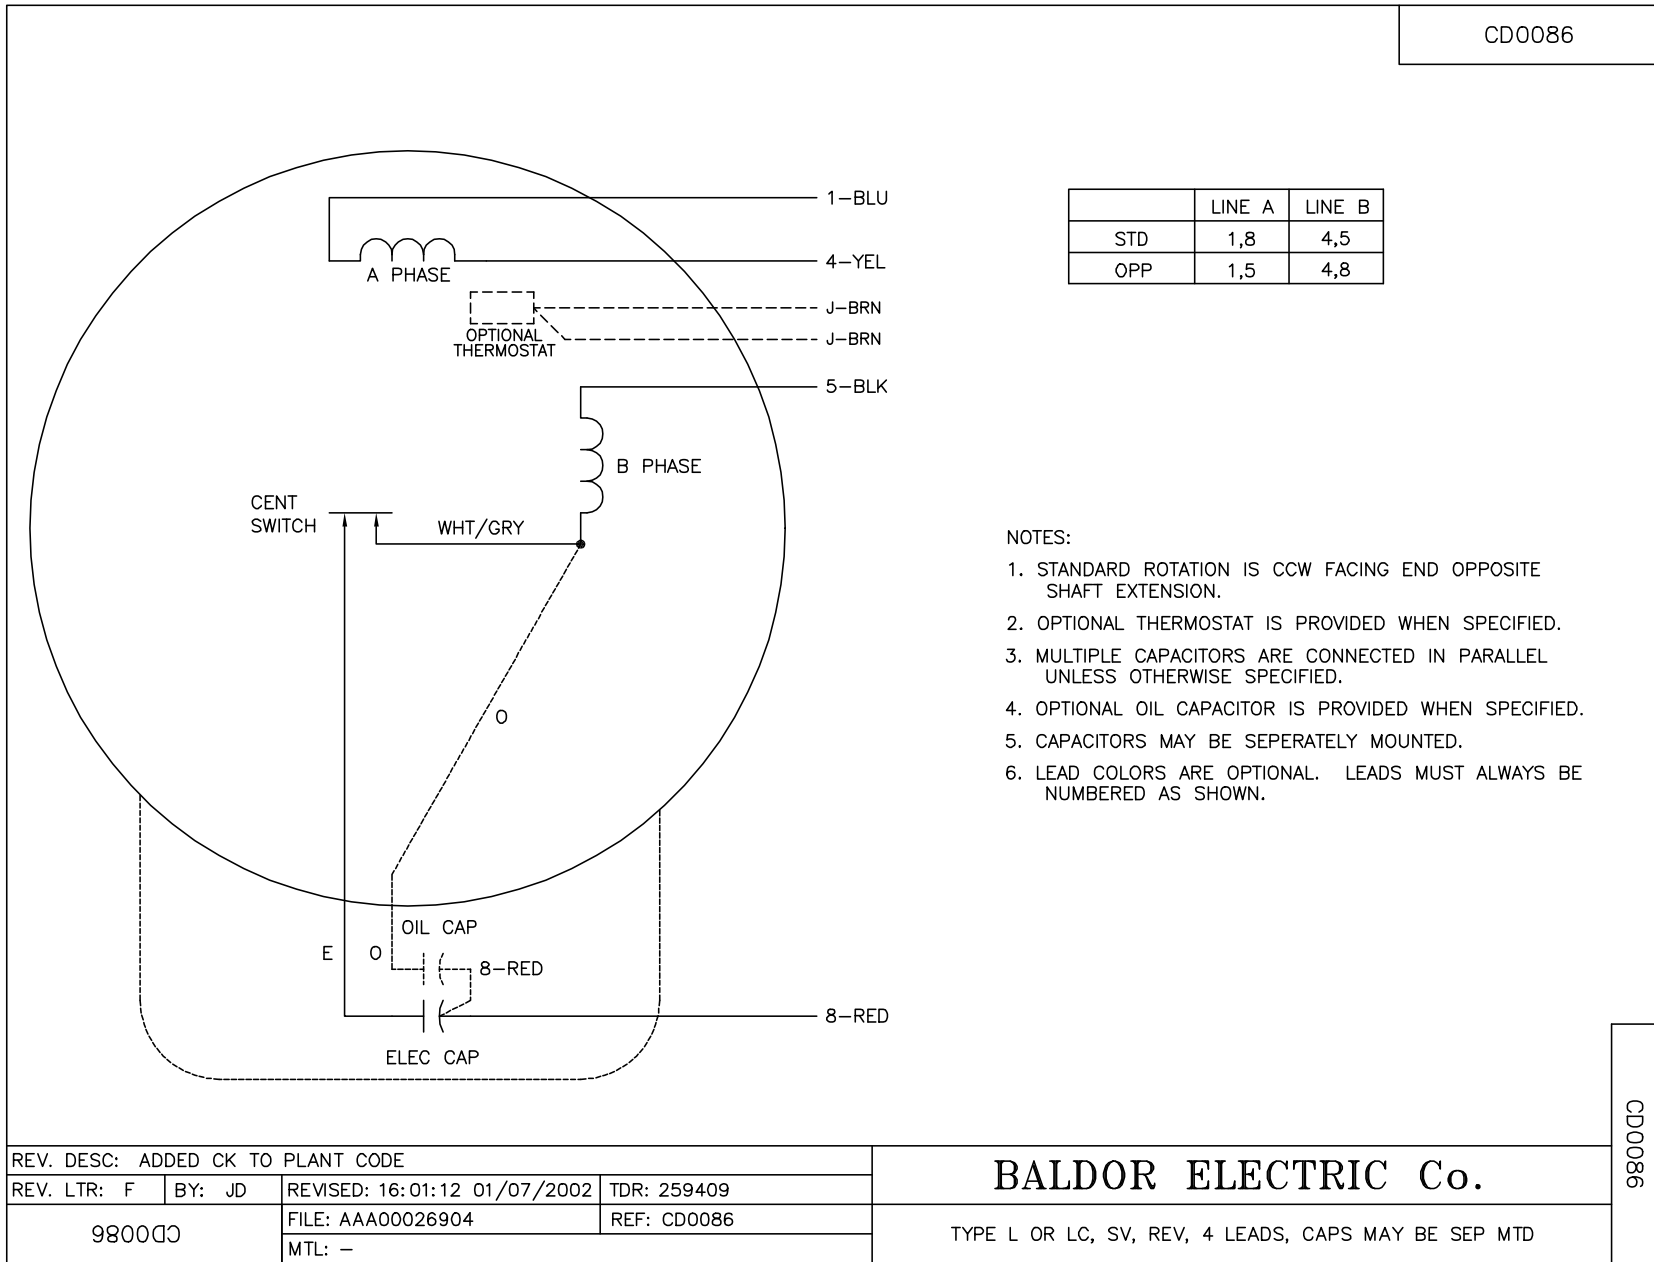

	LINE A	LINE B
STD	1,8	4,5
OPP	1,5	4,8

**NOTES:**

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. OPTIONAL OIL CAPACITOR IS PROVIDED WHEN SPECIFIED.
5. CAPACITORS MAY BE SEPERATELY MOUNTED.
6. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED CK TO PLANT CODE			
REV. LTR: F	BY: JD	REVISED: 16:01:12 01/07/2002	TDR: 259409
980000		FILE: AAA00026904	REF: CD0086
		MTL: -	

**BALDOR ELECTRIC Co.**

TYPE L OR LC, SV, REV, 4 LEADS, CAPS MAY BE SEP MTD

CD0086