

ABB BALDOR RELIANCE III

Customer information packet

JSL525A

1HP, 3450RPM, 1PH, 60HZ, 56Y, 3424L, OPEN, F1, N

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56Y
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	1.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 115.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	7.500 A @ 208.0 V 6.300 A @ 230.0 V 12.600 A @ 115.0 V
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	70.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Terminal Panel
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	6.3 a

Part Detail

Revision	Q
Type	AC
Mech. spec.	34M226
Base	
Status	PRD/A
Elec. spec.	34WGR051
Layout	34LYM226
Eff. date	10-28-2024
CD Diagram	CD0203
Poles	02
Leads	5#16,1#14 #1TH Y
Proprietary	False
Created date	05-08-2013

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Terminal Panel Or Lead Hole
Motor Lead Quantity/Wire Size	5 @ 16 AWG
Motor Lead Termination	Flying Leads With QC
Motor Standards	NEMA
Motor Type	3424L
Mounting Arrangement	F1
Number of Poles	2
Overall Length	12.72 IN
Power Factor	74
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Pool Pump
Pulley Shaft Indicator	Ext Thread & Tapped Hole
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.40
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Fixed Opposite Standard
Shaft Slinger Indicator	Shaft Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	EP

Winding Thermal 2

None

Nameplate

NP1257L									
CAT.NO.	JSL525A								
SPEC.	34M226R051G1								
HP	1								
VOLTS	115/230								
AMP	12.6/6.3								
RPM	3450								
FRAME	56Y		HZ	60		PH	1		
SER.F.	1.40	CODE	K	DES	-	CL	B		
NEMA-NOM-EFF	70	PF	74						
RATING	40C AMB-CONT								
CC									
DE	6203	ODE	6203						
ENCL	OPEN	SN							
	SFA 15.8/7.9								

AC Induction Motor Performance Data

Record # 42892

Typical performance - not guaranteed values

Winding: 34WGR051-R001			Type: 3424L		Enclosure: OPEN			
Nameplate Data			115 V, 60 Hz: Low Voltage Connection					
Rated Output (HP)		1	Full Load Torque		1.52 LB-FT			
Volts		115/230	Start Configuration		direct on line			
Full Load Amps		12.6/6.3	Breakdown Torque		5.19 LB-FT			
R.P.M.		3450	Pull-up Torque		2.82 LB-FT			
Hz		60	Phase		1	Locked-rotor Torque	3.92 LB-FT	
NEMA Design Code		-	KVA Code		K	Starting Current		74.9 A
Service Factor (S.F.)		1.4		No-load Current		8.99 A		
NEMA Nom. Eff.		70	Power Factor		74	Line-line Res. @ 25°C		0.41913 Ω A Ph 1.2803 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		32°C		
S.F. Amps		15.8/7.9		Temp. Rise @ S.F. Load		46°C		

Load Characteristics 115 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	38	53	66	74	80	85	83
Efficiency	47.2	61.9	68.5	70.7	70.8	69.8	70.2
Speed	3565.2	3540.5	3512.2	3481.8	3448.7	3402.1	3421
Line amperes	9.26	9.87	11	12.5	14.3	16.6	15.7


ABB Motors and Mechanical Inc.


WINDING # 34WGR051

Typical performance - not guaranteed values.

1 HP 1 PH 60 HZ 3450 RPM 115 V 3424L

TORQUES (LB-FT) : PO=5.19 PU=2.82 LR=3.92 LRA=74.9

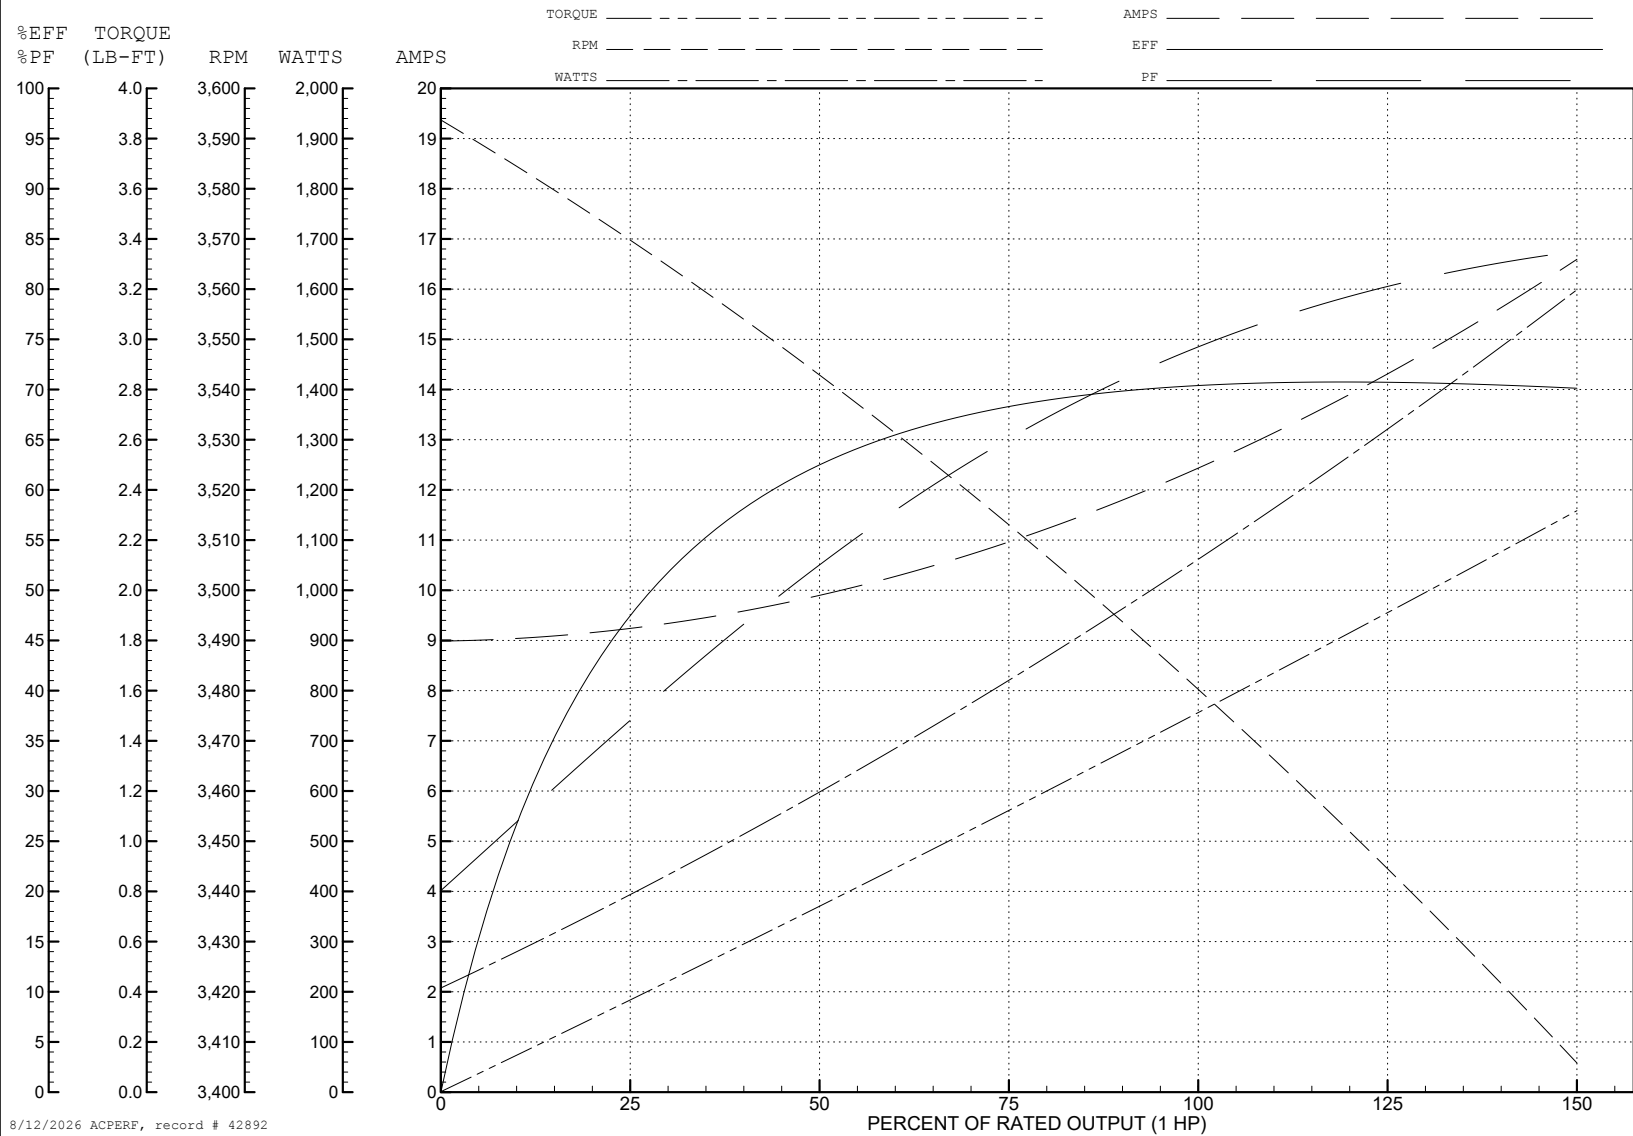

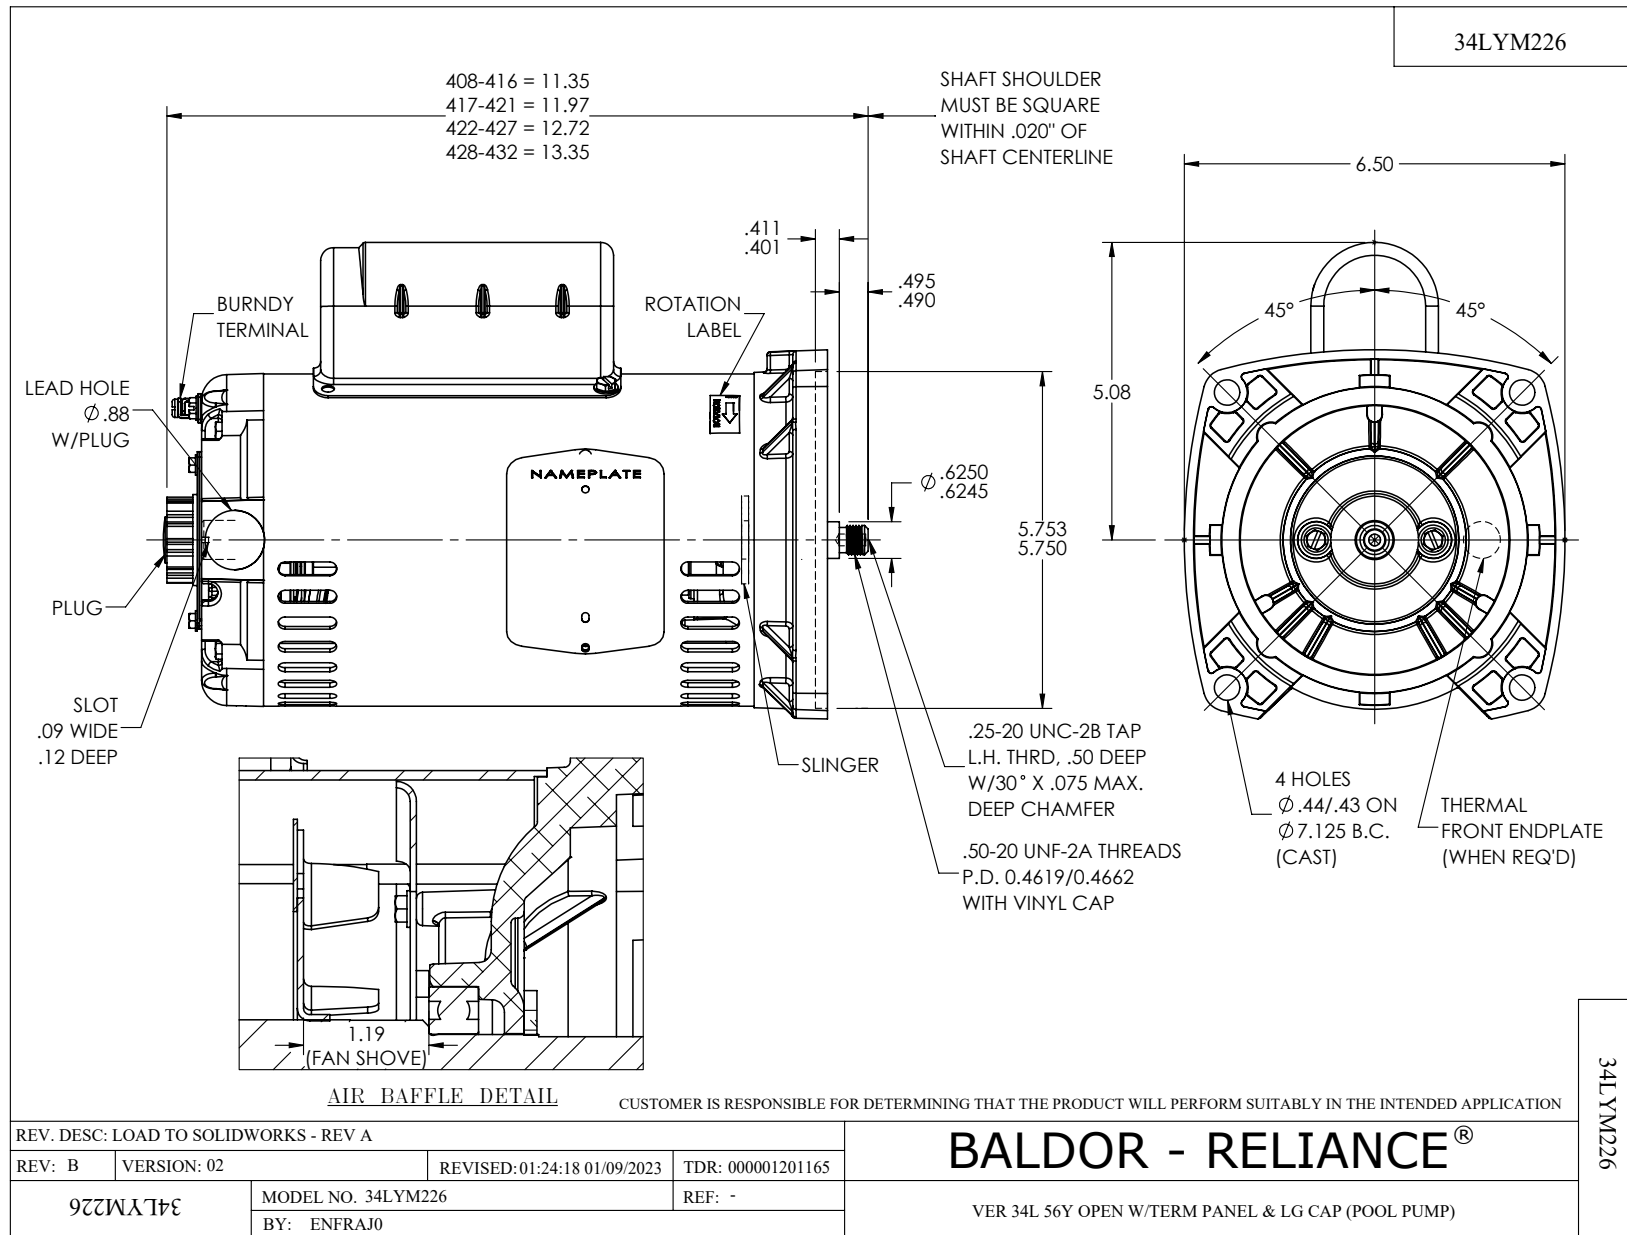

CD0203

