

BALDOR • RELIANCE

Customer information packet

KBM3458

.33HP, 1725RPM, 3PH, 60HZ, 56C, BRAKE, 3416M

Class - None

Division - Not Applicable

Specifications

Enclosure	TENV
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Brake Torque	3.0 lb-ft
Current @ Voltage	1.500 A @ 208.0 V 1.400 A @ 230.0 V .700 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	70.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Brake Mounting

Part detail

Revision	AE
Type	AC
Mech. spec.	34K045
Base	
Status	PRD/A
Elec. spec.	34WG0116
Layout	34LYK045
Eff. date	02-08-2024
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	01-01-0001

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	0.7 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3416M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	14.36 IN
Power Factor	64
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Vibration Sensor Indicator

No Vibration Sensor

Nameplate

NP1256L									
CAT.NO.	KBM3458								
SPEC.	34K45-116-B								
HP	.33								
VOLTS	208-230/460								
AMP	1.5-1.4/.7								
RPM	1725								
FRAME	56C		HZ	60		PH	3		
SER.F.	1.00	CODE	K	DES	B	CLASS	B		
NEMA-NOM-EFF	70	PF	64						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TENV	SN							

AC Induction Motor Performance Data

Record # 6545

Typical performance - not guaranteed values

Winding: 34WG0116-R001		Type: 3416M	Enclosure: TENV	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	.33	Full Load Torque	1 LB-FT	
Volts	208-230/460	Start Configuration	direct on line	
Full Load Amps	1.5-1.4/.7	Breakdown Torque	4.9 LB-FT	
R.P.M.	1725	Pull-up Torque	3.35 LB-FT	
Hz	60 Phase	Locked-rotor Torque	3.75 LB-FT	
NEMA Design Code	B KVA Code	Starting Current	4.3 A	
Service Factor (S.F.)	1	No-load Current	0.54 A	
NEMA Nom. Eff.	70 Power Factor	Line-line Res. @ 25°C	39.4 Ω	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	60°C	

Load Characteristics 460 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	28	41	52	61	68	73
Efficiency	50	65	72	75.5	77	77
Speed	1784	1771	1758	1744	1729	1713
Line amperes	0.55	0.58	0.62	0.67	0.73	0.81


ABB Motors and Mechanical Inc.

WINDING # 34WG0116

0.33 HP 3 PH 60 HZ 1725 RPM 460 V 3416M


Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=4.9 PU=3.35 LR=3.75 LRA=4.3

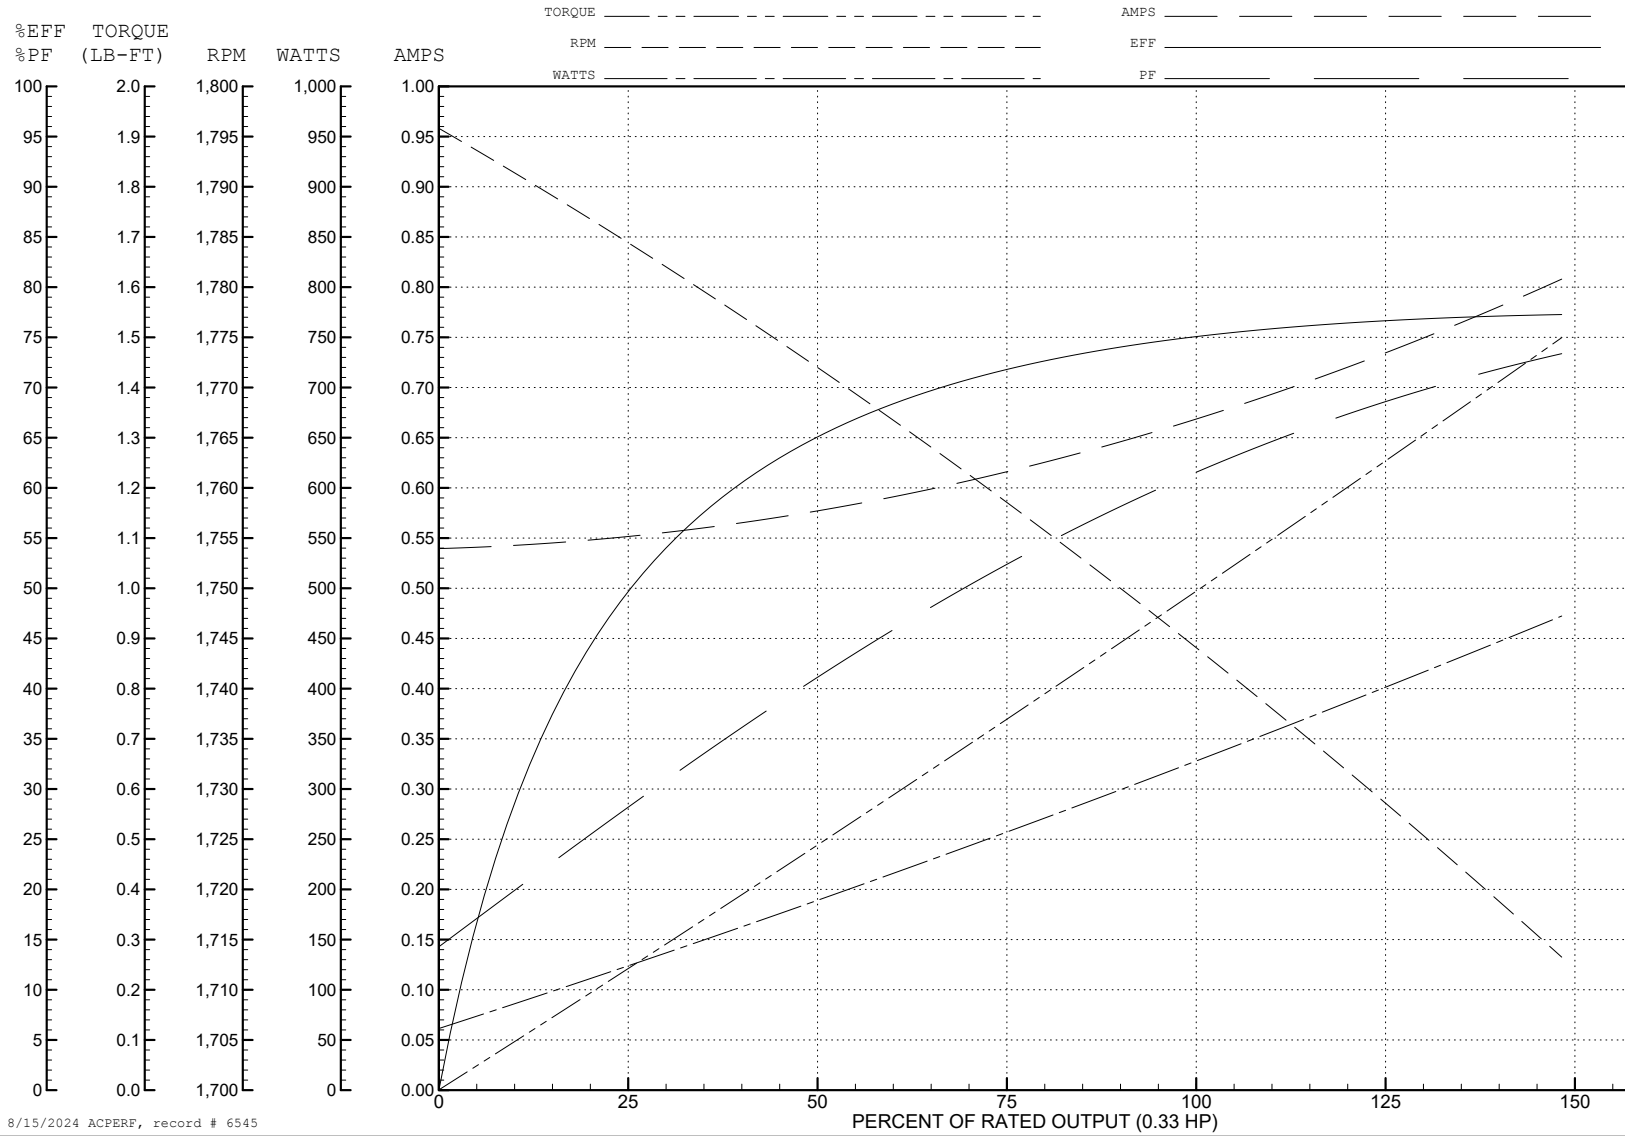

8/15/2024 ACPERF, record # 6545

34LYK045

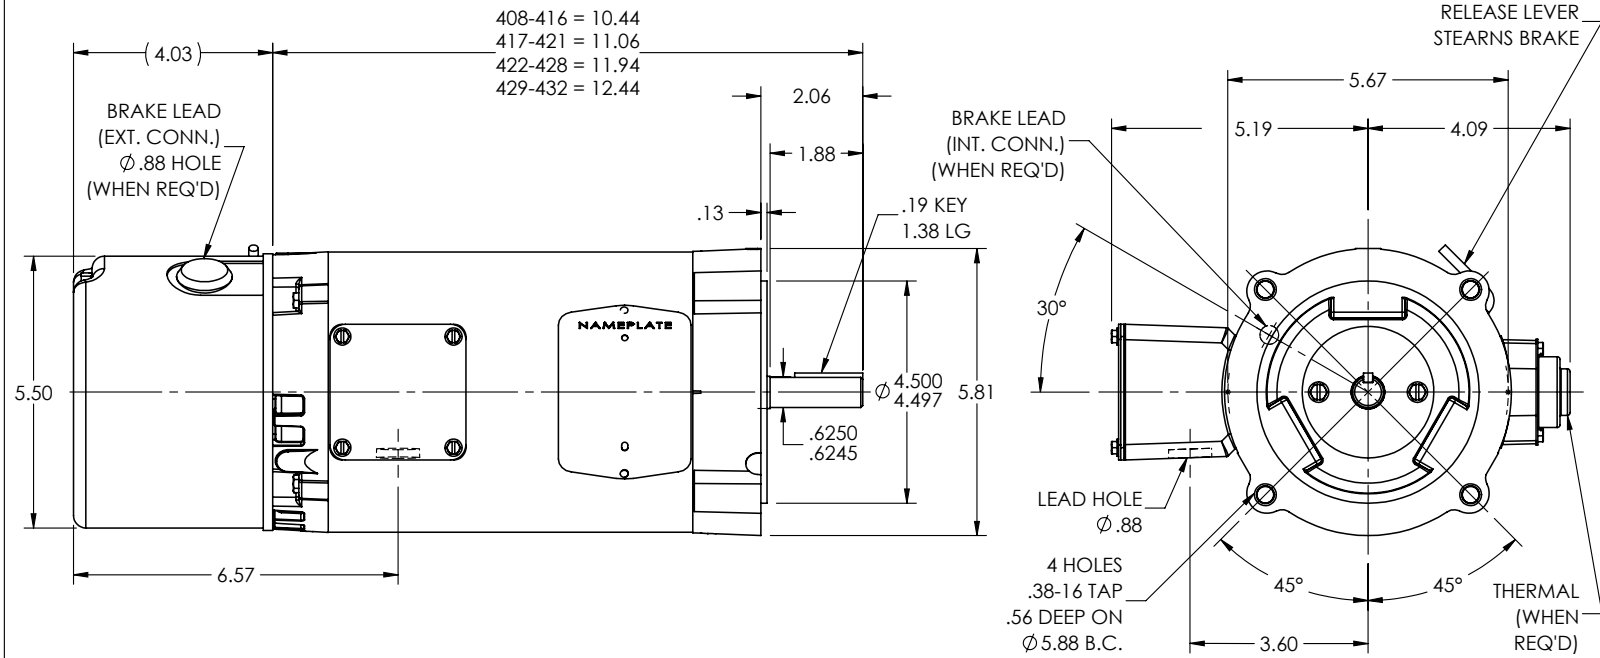

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION


REV. DESC: LOAD TO SOLIDWORKS - REV H			
REV: J	VERSION: 03	REVISED: 08:31:02 04/13/2023	TDR: 000001201165
34LYK045	MODEL NO. 34LYK045	REF: -	
	BY: ENFRAJ0		

BALDOR - RELIANCE®


VERT 34M NEMA 56C TENV W/STEARNS BRAKE (48 SERIES)

34LYK045

CD0005

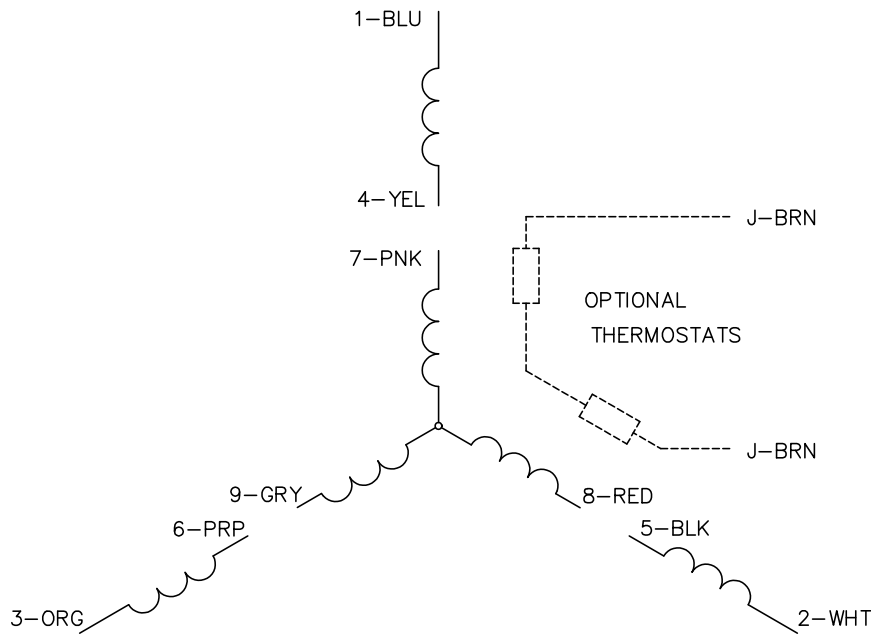


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS