

ABB BALDOR RELIANCE III

Customer information packet

KEL11203

.25HP, 1725RPM, 1PH, 60HZ, 56C, 3411LC, OPEN, F

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.250 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.300 A @ 230.0 V 1.900 A @ 208.0 V 2.600 A @ 115.0 V
Design Code	-
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	68.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Drip Cover Mounting
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.3 a

Part Detail

Revision	K
Type	AC
Mech. spec.	34F534
Base	
Status	PRD/A
Elec. spec.	34WGR064
Layout	34LYF534
Eff. date	02-11-2025
CD Diagram	CD0055
Poles	04
Leads	6#18
Proprietary	False
Created date	09-25-2014

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3411LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.85 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3155L									
CAT.NO.	KEL11203								
SPEC.	34F534R064G1								
HP	.25								
VOLTS	115/230								
AMP	2.6/1.3								
RPM	1725								
FRAME	56C		HZ	60			PH	1	
SER.F.	1.35	CODE	L	DES	-	CL	B		
F.L. AVG. EFF.	68.5	PF	89						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	OPEN	SN							
	SFA 3.4/1.7								

AC Induction Motor Performance Data

Record # 47419

Typical performance - not guaranteed values

Winding: 34WGR064-R002			Type: 3411LC		Enclosure: OPEN	
Nameplate Data				115 V, 60 Hz: Low Voltage Connection		
Rated Output (HP)		.25		Full Load Torque		0.754 LB-FT
Volts		115/230		Start Configuration		direct on line
Full Load Amps		2.6/1.3		Breakdown Torque		1.86 LB-FT
R.P.M.		1725		Pull-up Torque		1.57 LB-FT
Hz		60 Phase		Locked-rotor Torque		2.48 LB-FT
NEMA Design Code		- KVA Code		Starting Current		20.3 A
Service Factor (S.F.)		1.35		No-load Current		1.53 A
NEMA Nom. Eff.		68.5 Power Factor		Line-line Res. @ 25°C		3.4881 Ω A Ph 6.3165 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		27°C
S.F. Amps		3.7/1.7		Temp. Rise @ S.F. Load		34°C

Load Characteristics 115 V, 60 Hz, 0.25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	67	79	85	90	92	94	93
Efficiency	37.2	55.5	65.1	69.7	71.4	71.1	71.3
Speed	1783.6	1770.8	1755.8	1739.1	1717.7	1691.5	1707
Line amperes	1.63	1.85	2.18	2.59	3.1	3.69	3.34


ABB Motors and Mechanical Inc.

WINDING # 34WGR064

Typical performance - not guaranteed values.

0.25 HP 1 PH 60 HZ 1725 RPM 115 V 3411LC

TORQUES (LB-FT): PO=1.86 PU=1.57 LR=2.48 LRA=20.3

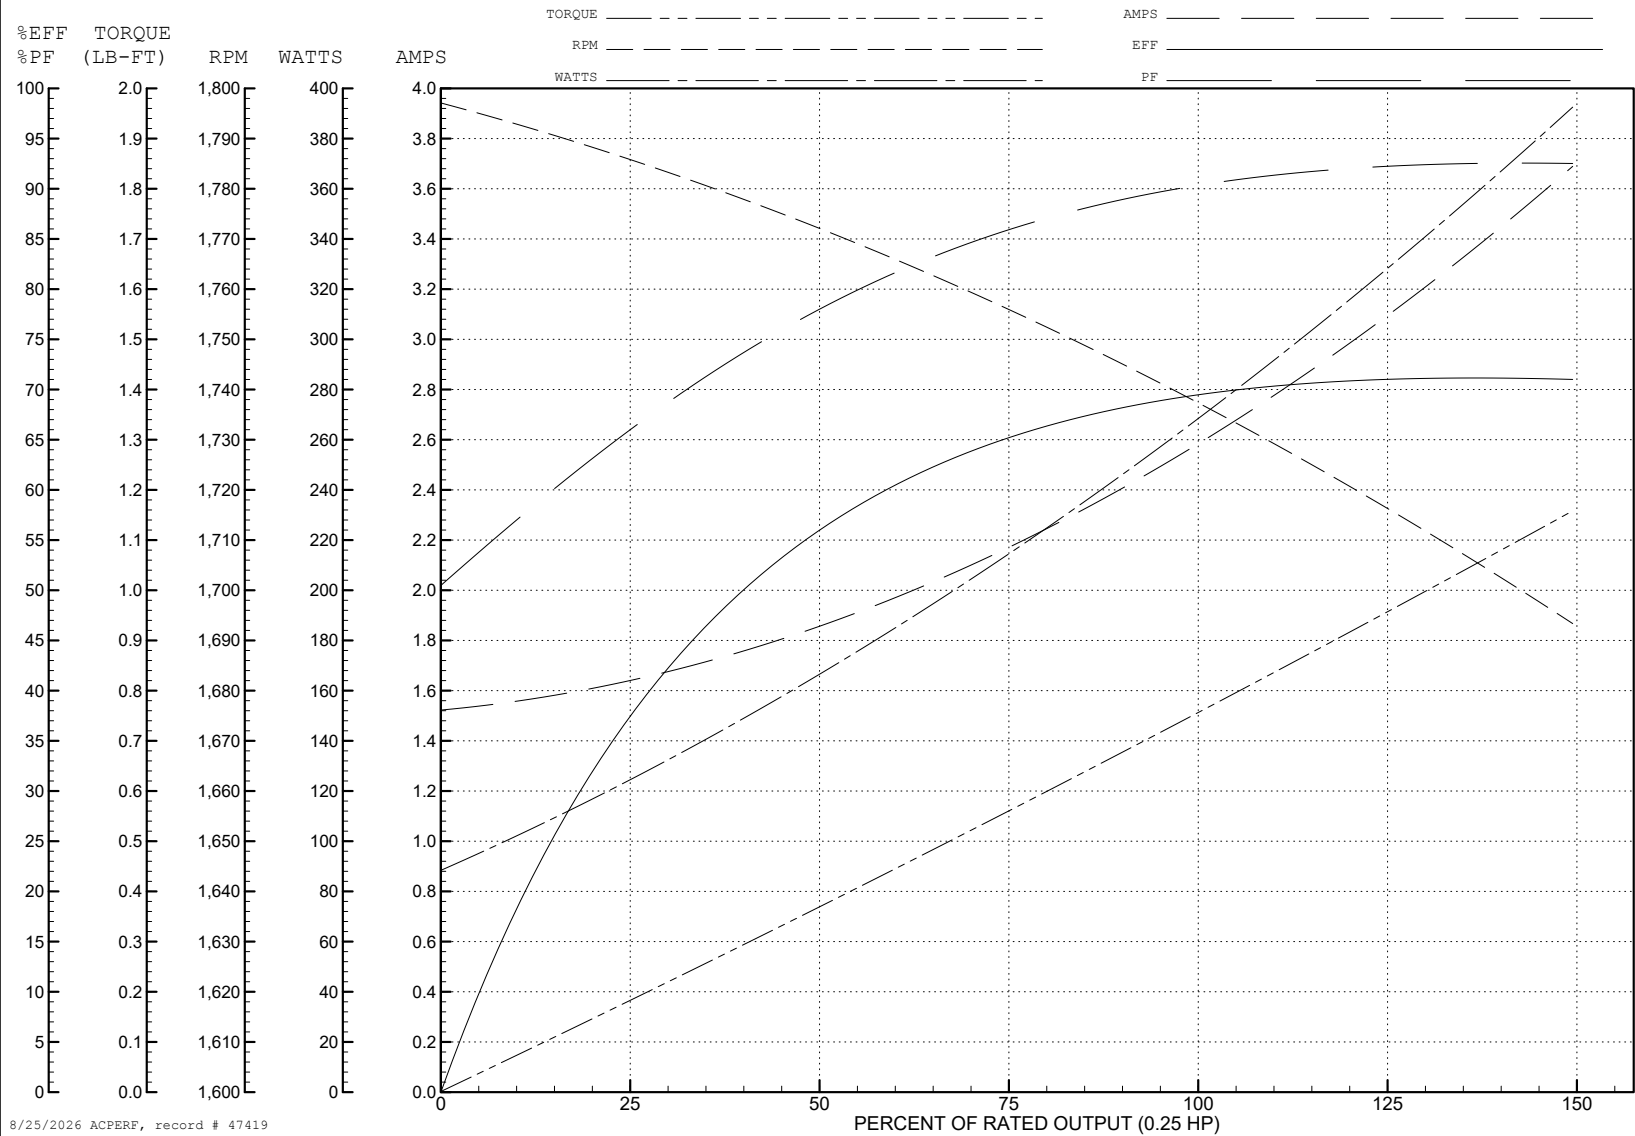

AC Induction Motor Performance Data

Record # 49393

Typical performance - not guaranteed values

Winding: 34WGR064-R002			Type: 3411LC		Enclosure: OPEN	
Nameplate Data			230 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.25	Full Load Torque			0.753 LB-FT
Volts		115/230	Start Configuration			direct on line
Full Load Amps		2.6/1.3	Breakdown Torque			1.88 LB-FT
R.P.M.		1725	Pull-up Torque			1.23 LB-FT
Hz	60	Phase	1	Locked-rotor Torque		1.94 LB-FT
NEMA Design Code		-	KVA Code	L	Starting Current	9.92 A
Service Factor (S.F.)		1.35	No-load Current			0.836 A
NEMA Nom. Eff.	68.5	Power Factor	89	Line-line Res. @ 25°C		3.39 Ω A Ph 6.4 Ω B Ph
Rating - Duty		40C	AMB-CONT	Temp. Rise @ Rated Load		30°C
S.F. Amps		3.4/1.7		Temp. Rise @ S.F. Load		36°C
				Rotor inertia		0.0261 LB-FT2

Load Characteristics 230 V, 60 Hz, 0.25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	67	79	86	90	92	93	92
Efficiency	34.6	52.7	62.8	67.9	69.9	69.7	69.8
Speed	1784	1771	1756	1740	1718	1692	1708
Line amperes	0.871	0.97	1.13	1.33	1.58	1.87	1.7


ABB Motors and Mechanical Inc.

WINDING # 34WGR064

Typical performance - not guaranteed values.

0.25 HP 1 PH 60 HZ 1725 RPM 230 V 3411LC

TORQUES (LB-FT): PO=1.88 PU=1.23 LR=1.94 LRA=9.92

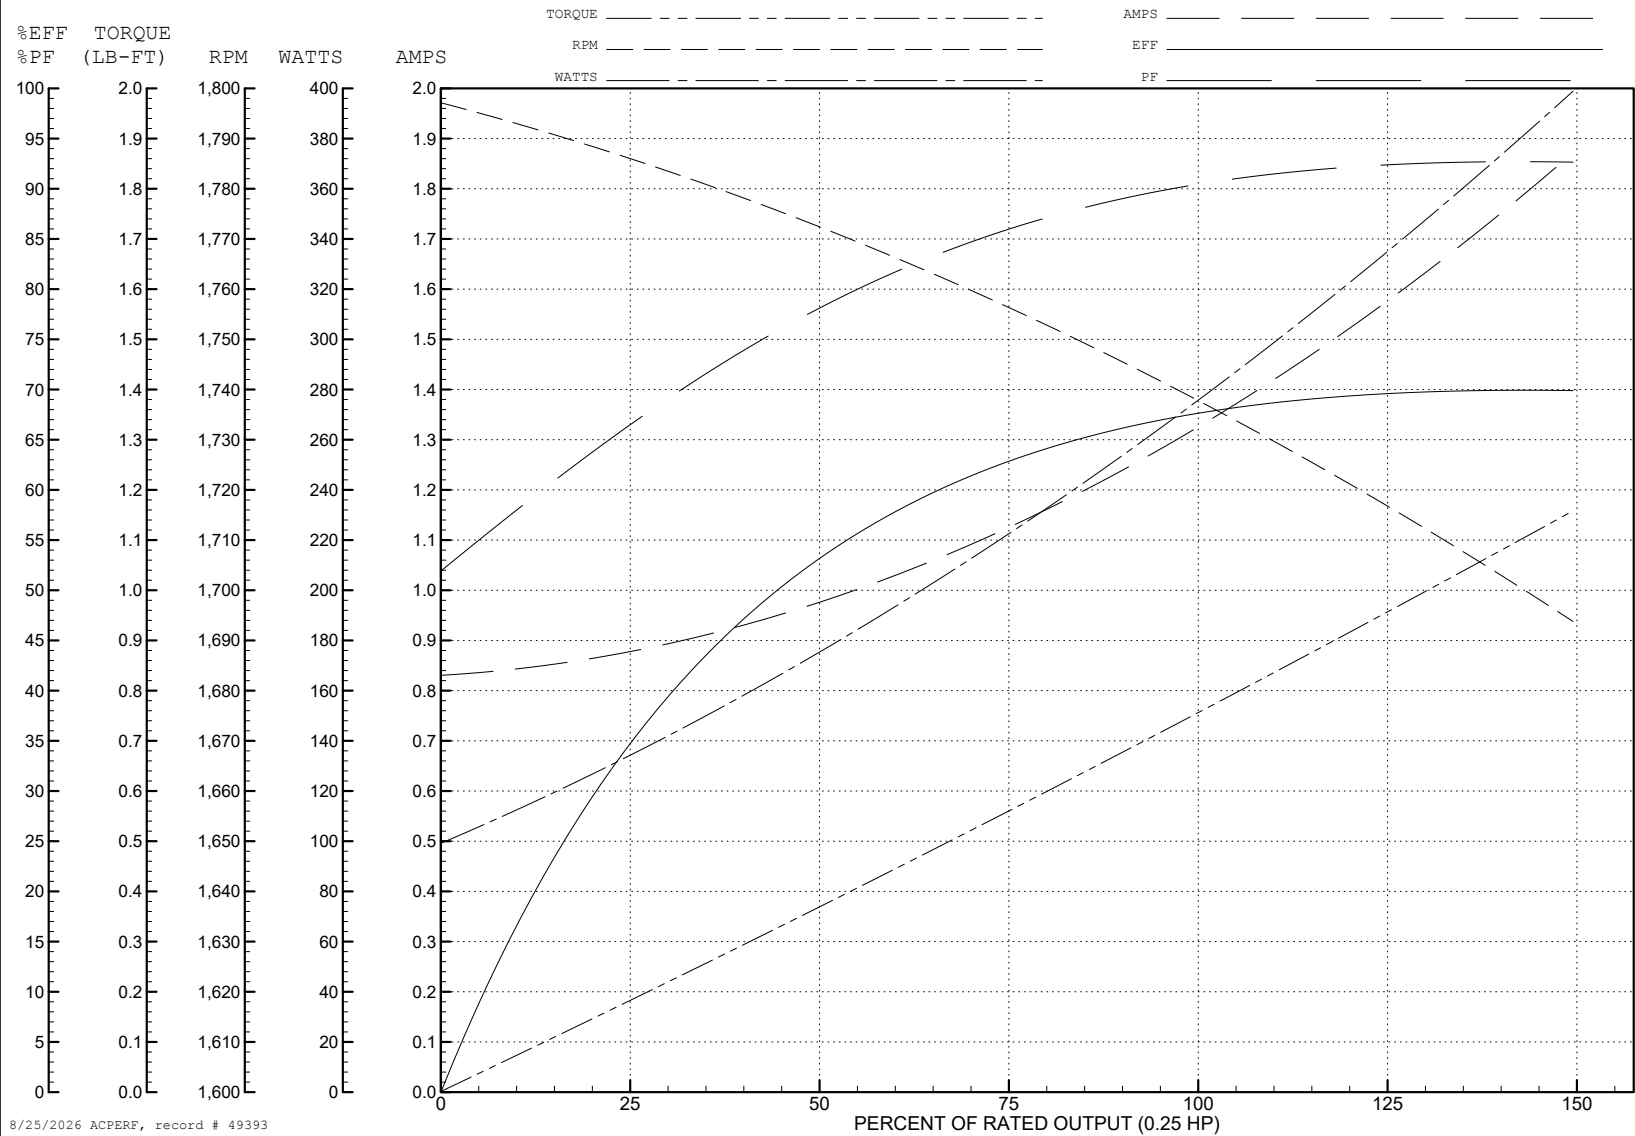



CD0055

