

**BALDOR • RELIANCE**

---

# Customer information packet

## KM3454-57

.25HP, IP54, 1425RPM, 3PH, 50HZ, 56C, 3410M

Class - None

Division - Not Applicable

## Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.250 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	400.0 V @ 50 HZ 230.0 V @ 50 HZ
Agency Approvals	CE CSA UR WEEE
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.700 A @ 400.0 V 1.200 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	64.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

## Part detail

Revision	N
Type	AC
Mech. spec.	34A063
Base	
Status	PRD/A
Elec. spec.	34WGS886
Layout	34LYA063
Eff. date	10-25-2024
CD Diagram	CD0022
Poles	04
Leads	6#18
Proprietary	False
Created date	09-02-2011

Heater Indicator	No Heater
High Voltage Full Load Amps	0.7 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3410M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	59
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1425 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

<b>Winding Thermal 1</b>	<b>None</b>
<b>Winding Thermal 2</b>	<b>None</b>

---

**Nameplate**

<b>NP1372L</b>										
<b>CAT.NO.</b>	KM3454-57									
<b>SPEC.</b>	34A063S886G1									
<b>HP</b>	.25/KW .18									
<b>VOLTS</b>	230/400									
<b>AMP</b>	1.2/.7 SFA 1.3/.75									
<b>R.P.M. (1/MIN)</b>	1425									
<b>FRAME</b>	56C		<b>HZ</b>	50		<b>PH</b>	3			
<b>SER.F.</b>	1.25	<b>CODE</b>	L	<b>DES</b>	B	<b>CL</b>	B			
<b>NEMA-NOM-EFF</b>	64	<b>PF</b>	59							
<b>RATING</b>	40C AMB-S1 CONT									
<b>CC</b>			IP44 KG9 IC411							
<b>DE</b>	6203		<b>ODE</b>	6203						
<b>ENCL</b>	TEFC	<b>SN</b>								
	IE2-61.9(75%)53.7(50%)									

**AC Induction Motor Performance Data**

Record # 35108

Typical performance - not guaranteed values

<b>Winding: 34WGS886-R001</b>		<b>Type: 3410M</b>		<b>Enclosure: TEFC</b>	
<b>Nameplate Data</b>			<b>400 V, 50 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	.25	<b>Full Load Torque</b>	0.901 LB-FT		
<b>Volts</b>	230/400	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	1.2/.7	<b>Breakdown Torque</b>	2.93 LB-FT		
<b>R.P.M.</b>	1425	<b>Pull-up Torque</b>	1.97 LB-FT		
<b>Hz</b>	50 <b>Phase</b>	3	<b>Locked-rotor Torque</b>	2.16 LB-FT	
<b>NEMA Design Code</b>	<b>B KVA Code</b>	L	<b>Starting Current</b>	2.75 A	
<b>Service Factor (S.F.)</b>		1.25	<b>No-load Current</b>	0.59 A	
<b>NEMA Nom. Eff.</b>	64 <b>Power Factor</b>	59	<b>Line-line Res. @ 25°C</b>	72 Ω	
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	53°C	
<b>S.F. Amps</b>	1.3/.75		<b>Temp. Rise @ S.F. Load</b>	60°C	
			<b>Locked-rotor Power Factor</b>	80	
			<b>Rotor inertia</b>	0.0238 LB-FT <sup>2</sup>	

**Load Characteristics 400 V, 50 Hz, 0.25 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	30	42	51	59	67	74	67
<b>Efficiency</b>	37.9	53.7	61.9	66.1	68.2	68.2	68.2
<b>Speed</b>	1483	1470	1456	1440	1423	1404	1423
<b>Line amperes</b>	0.592	0.603	0.635	0.678	0.723	0.769	0.723


ABB Motors and Mechanical Inc.

WINDING # 34WGS886

0.25 HP 3 PH 50 HZ 1425 RPM 400 V 3410M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=2.93 PU=1.97 LR=2.16 LRA=2.75

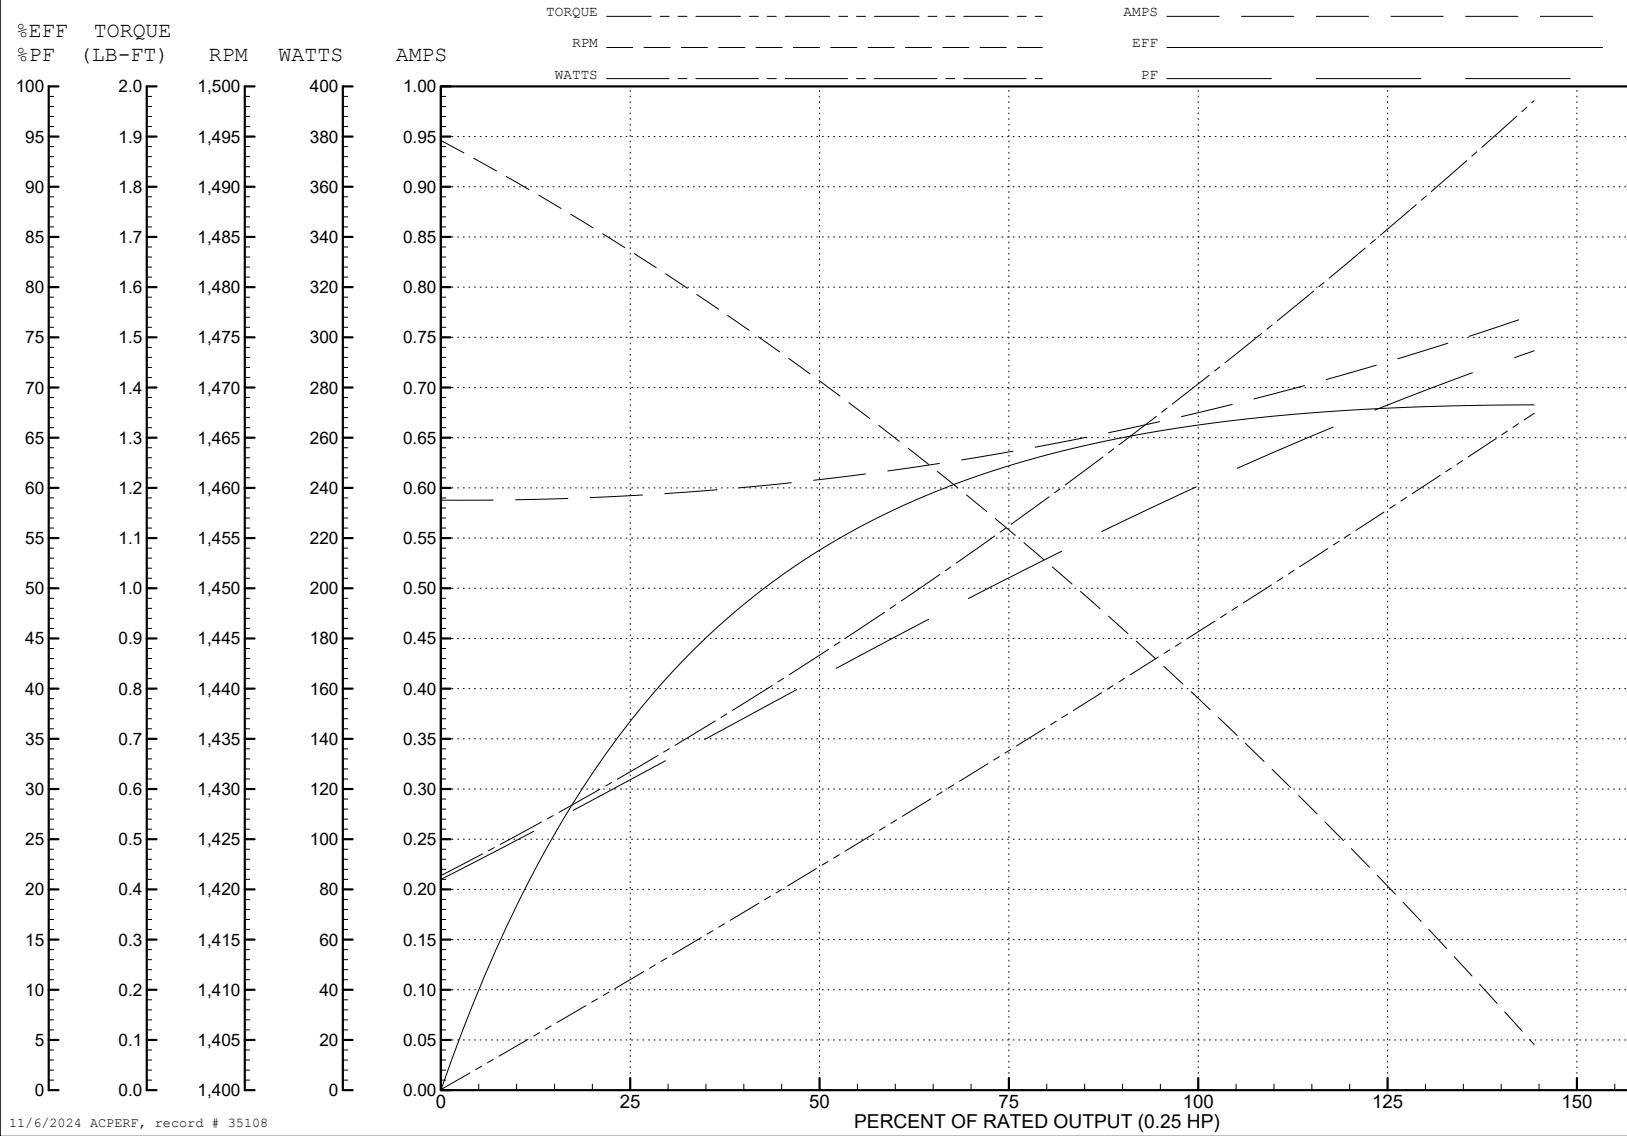

11/6/2024 ACPERF, record # 35108

**AC Induction Motor Performance Data**

Record # 46459

Typical performance - not guaranteed values

<b>Winding: 34WGS886-R001</b>		<b>Type: 3410M</b>		<b>Enclosure: TEFC</b>	
<b>Nameplate Data</b>			<b>230 V, 50 Hz: Low Voltage Connection</b>		
<b>Rated Output (HP)</b>	.25	<b>Full Load Torque</b>	0.901 LB-FT		
<b>Volts</b>	230/400	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	1.2/.7	<b>Breakdown Torque</b>	2.91 LB-FT		
<b>R.P.M.</b>	1425	<b>Pull-up Torque</b>	1.95 LB-FT		
<b>Hz</b>	50 <b>Phase</b>	3	<b>Locked-rotor Torque</b>	2.14 LB-FT	
<b>NEMA Design Code</b>	<b>B KVA Code</b>	L	<b>Starting Current</b>	4.74 A	
<b>Service Factor (S.F.)</b>		1.25	<b>No-load Current</b>	1.01 A	
<b>NEMA Nom. Eff.</b>	64 <b>Power Factor</b>	59	<b>Line-line Res. @ 25°C</b>	24.1 Ω	
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	52°C	
<b>S.F. Amps</b>	1.3/.75		<b>Temp. Rise @ S.F. Load</b>	59°C	
			<b>Locked-rotor Power Factor</b>	80	
			<b>Rotor inertia</b>	0.0238 LB-FT <sup>2</sup>	

**Load Characteristics 230 V, 50 Hz, 0.25 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	30	42	52	60	68	74	68
<b>Efficiency</b>	38.4	54.1	62.3	66.3	68.4	68.3	68.4
<b>Speed</b>	1483	1470	1456	1440	1422	1403	1422
<b>Line amperes</b>	1.02	1.04	1.09	1.17	1.24	1.33	1.24




ABB Motors and Mechanical Inc.

WINDING # 34WGS886

0.25 HP 3 PH 50 HZ 1425 RPM 230 V 3410M


Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=2.91 PU=1.95 LR=2.14 LRA=4.74

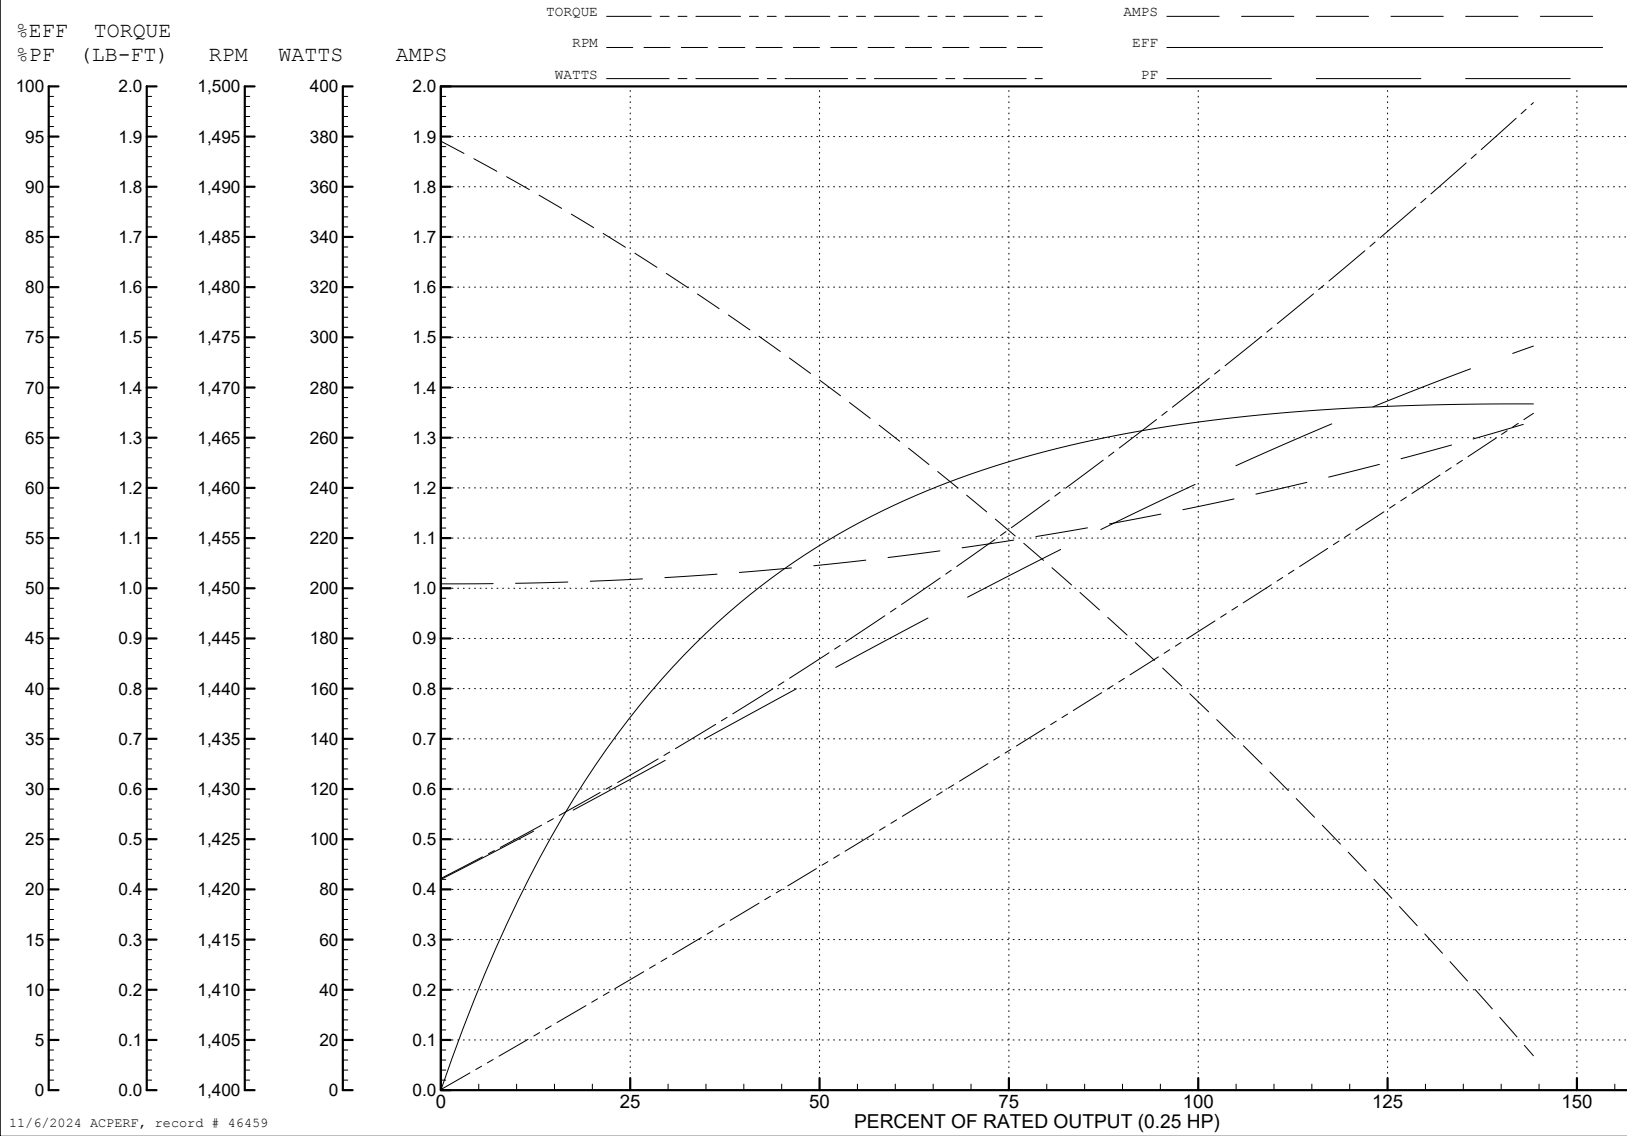

11/6/2024 ACPERF, record # 46459

34LYA063

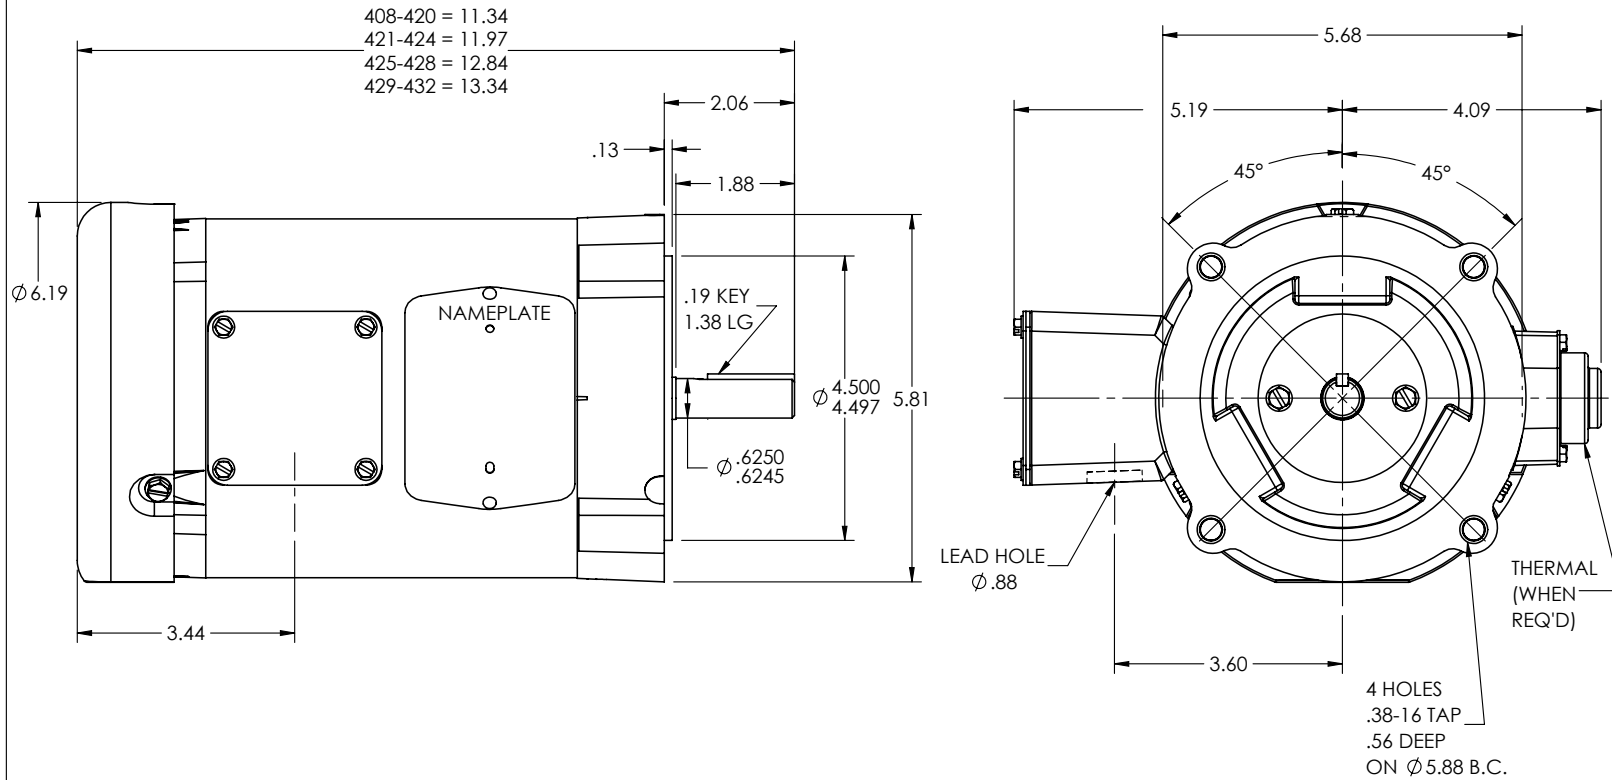

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION


REV. DESC: LOAD TO SOLIDWORKS			
REV: N	VERSION: 04	REVISED: 01:33:59 09/21/2022	TDR: 000001194274
34LYA063	MODEL NO. 34LYA063		REF: -
	BY: ENFRAJ0		

**BALDOR - RELIANCE®**


STD VERT 34M NEMA 56C TEFC

34LYA063

CD0022

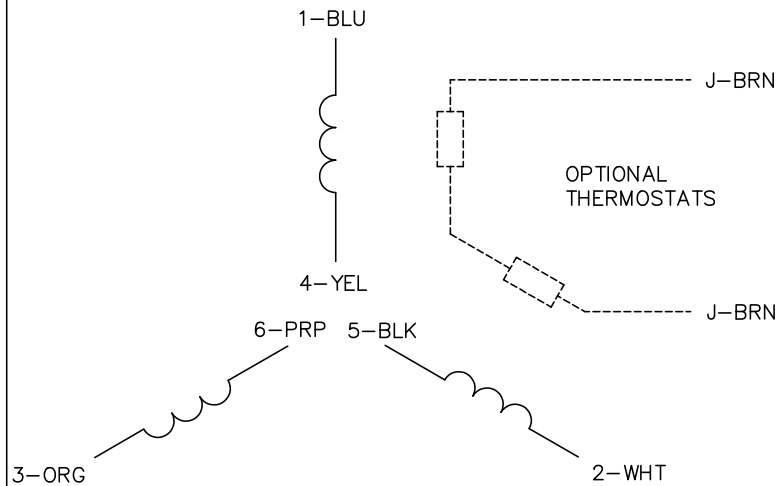


LOW VOLTAGE  
(1D)



LINE

HIGH VOLTAGE  
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: F	BY: JLP	REVISED: 01/21/99 3:54	TDR: 0171435
CD0022		FILE: AAA00005144	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 6 LEADS, DELTA/WYE CONNECTION

CD0022