



---

# Customer information packet

## L3912T

15HP, 1770RPM, 1PH, 60HZ, 256T, 3956LC, TEFC, F

Class - None

Division - Not Applicable

## Specifications

Enclosure	TEFC
Frame	256T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	15.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	208.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	58.000 A @ 230.0 V 65.000 A @ 208.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	58.0 a

## Part detail

Revision	R
Type	AC
Mech. spec.	39T044
Base	
Status	PRD/A
Elec. spec.	39WGX905
Layout	39LYT044
Eff. date	02-08-2024
CD Diagram	CD1084
Poles	04
Leads	2#6 A PH, 2#12 B PH
Proprietary	False
Created date	03-12-2015

<b>Insulation Class</b>	F
<b>Inverter Code</b>	Not Inverter
<b>KVA Code</b>	E
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Motor Lead Exit</b>	Ko Box
<b>Motor Lead Quantity/Wire Size</b>	2 @ 6 AWG, A PH
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3956LC
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	24.56 IN
<b>Power Factor</b>	96
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	Standard
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	1.625 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	1720 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP1256L</b>									
<b>CAT.NO.</b>	L3912T								
<b>SPEC.</b>	39T044X905								
<b>HP</b>	15								
<b>VOLTS</b>	208-230								
<b>AMP</b>	65-58								
<b>RPM</b>	1720								
<b>FRAME</b>	256T		<b>HZ</b>	60		<b>PH</b>	1		
<b>SER.F.</b>	1.00	<b>CODE</b>	E	<b>DES</b>	L	<b>CLASS</b>	F		
<b>NEMA-NOM-EFF</b>	86.5	<b>PF</b>	96						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>									
<b>DE</b>	6309		<b>ODE</b>	6307					
<b>ENCL</b>	TEFC	<b>SN</b>							

**AC Induction Motor Performance Data**

Record # 59422

Typical performance - not guaranteed values

Winding: 39WGX905-R001		Type: 3956LC		Enclosure: TEFC	
<b>Nameplate Data</b>			<b>230 V, 60 Hz: Single Voltage Motor</b>		
Rated Output (HP)	15	Full Load Torque	45.6 LB-FT		
Volts	208-230	Start Configuration	direct on line		
Full Load Amps	65-58	Breakdown Torque	111 LB-FT		
R.P.M.	1720	Pull-up Torque	54.2 LB-FT		
Hz	60 Phase	1	Locked-rotor Torque	93.6 LB-FT	
NEMA Design Code	L KVA Code	E	Starting Current	311 A	
Service Factor (S.F.)		1	No-load Current	4.94 A	
NEMA Nom. Eff.	86.5 Power Factor	96	Line-line Res. @ 25°C	0.12074 Ω A Ph 0.37139 Ω B Ph	
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	100°C	

**Load Characteristics 230 V, 60 Hz, 15 HP**

% of Rated Load	25	50	75	100	125	150
Power Factor	96	98	98	97	96	94
Efficiency	81	88.4	88.8	87	83.5	78.8
Speed	1783.3	1766.1	1746.3	1722.4	1693	1654.6
Line amperes	15.7	28	42	57.5	75.3	97.3


ABB Motors and Mechanical Inc.

WINDING # 39WGX905


Typical performance - not guaranteed values.

15 HP 1 PH 60 HZ 1720 RPM 230 V 3956LC


TORQUES (LB-FT): PO=111 PU=54.2 LR=93.6 LRA=311

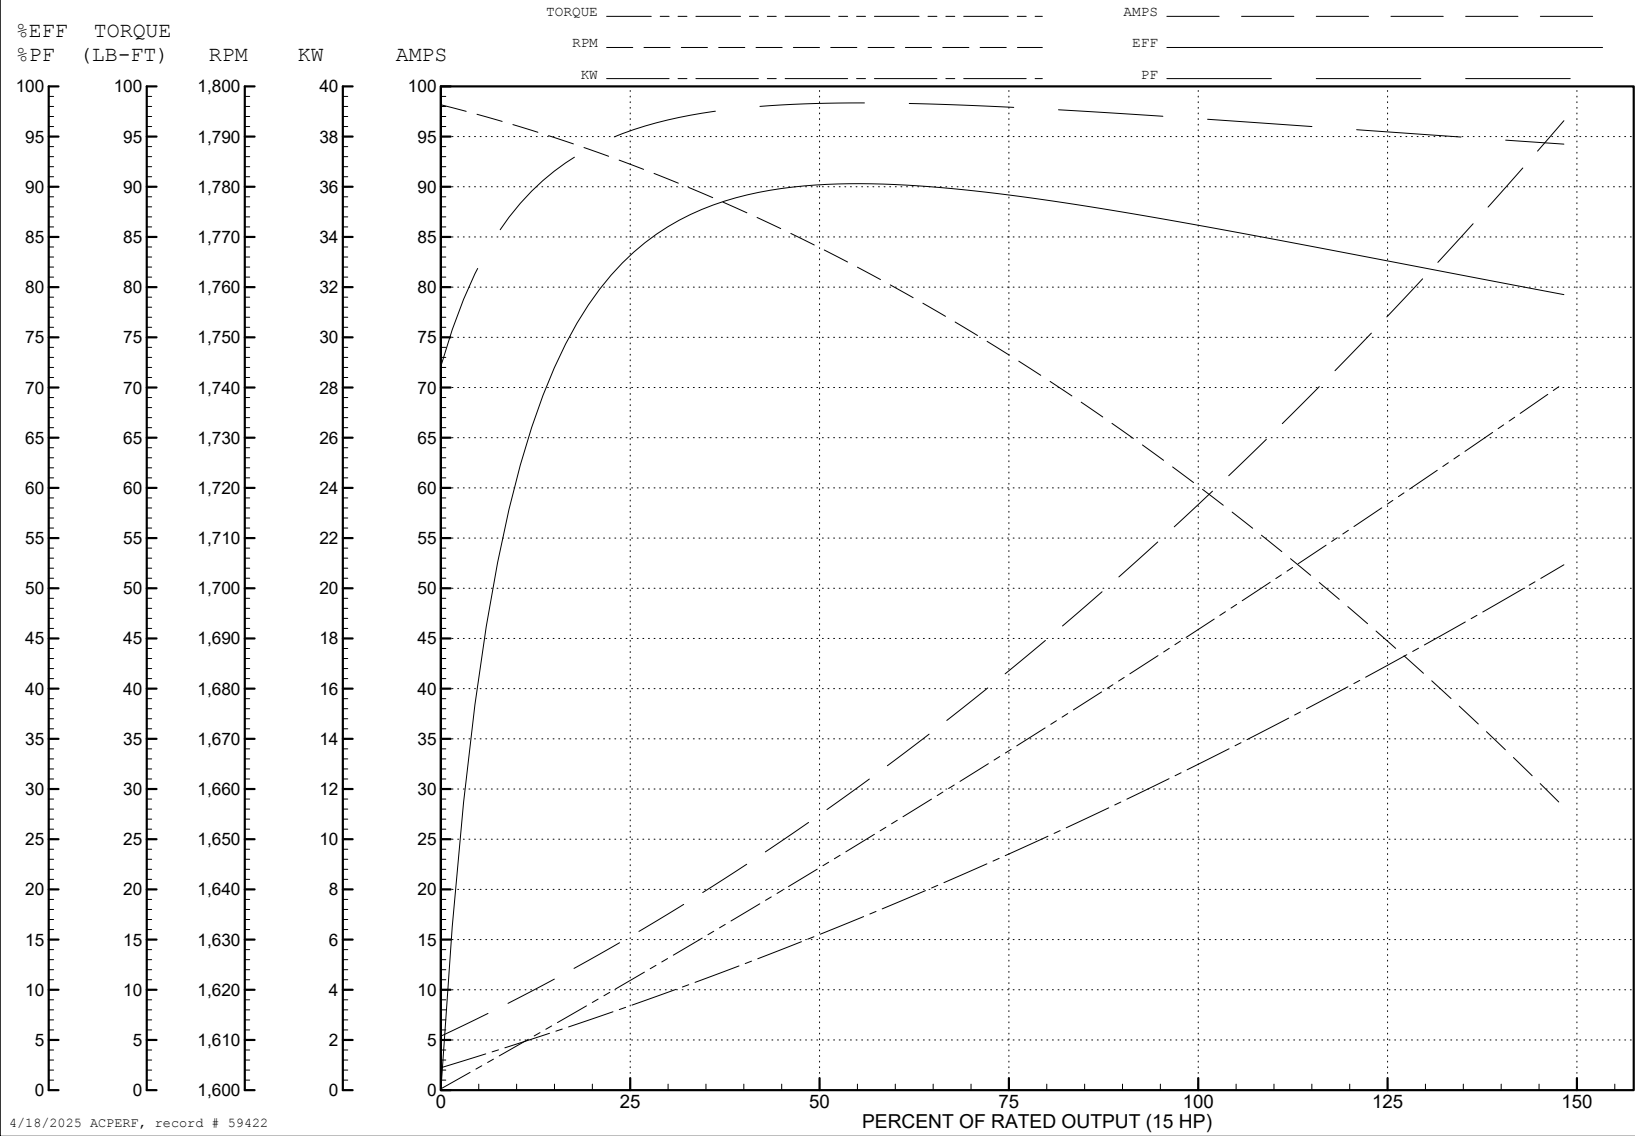

4/18/2025 ACPERF, record # 59422

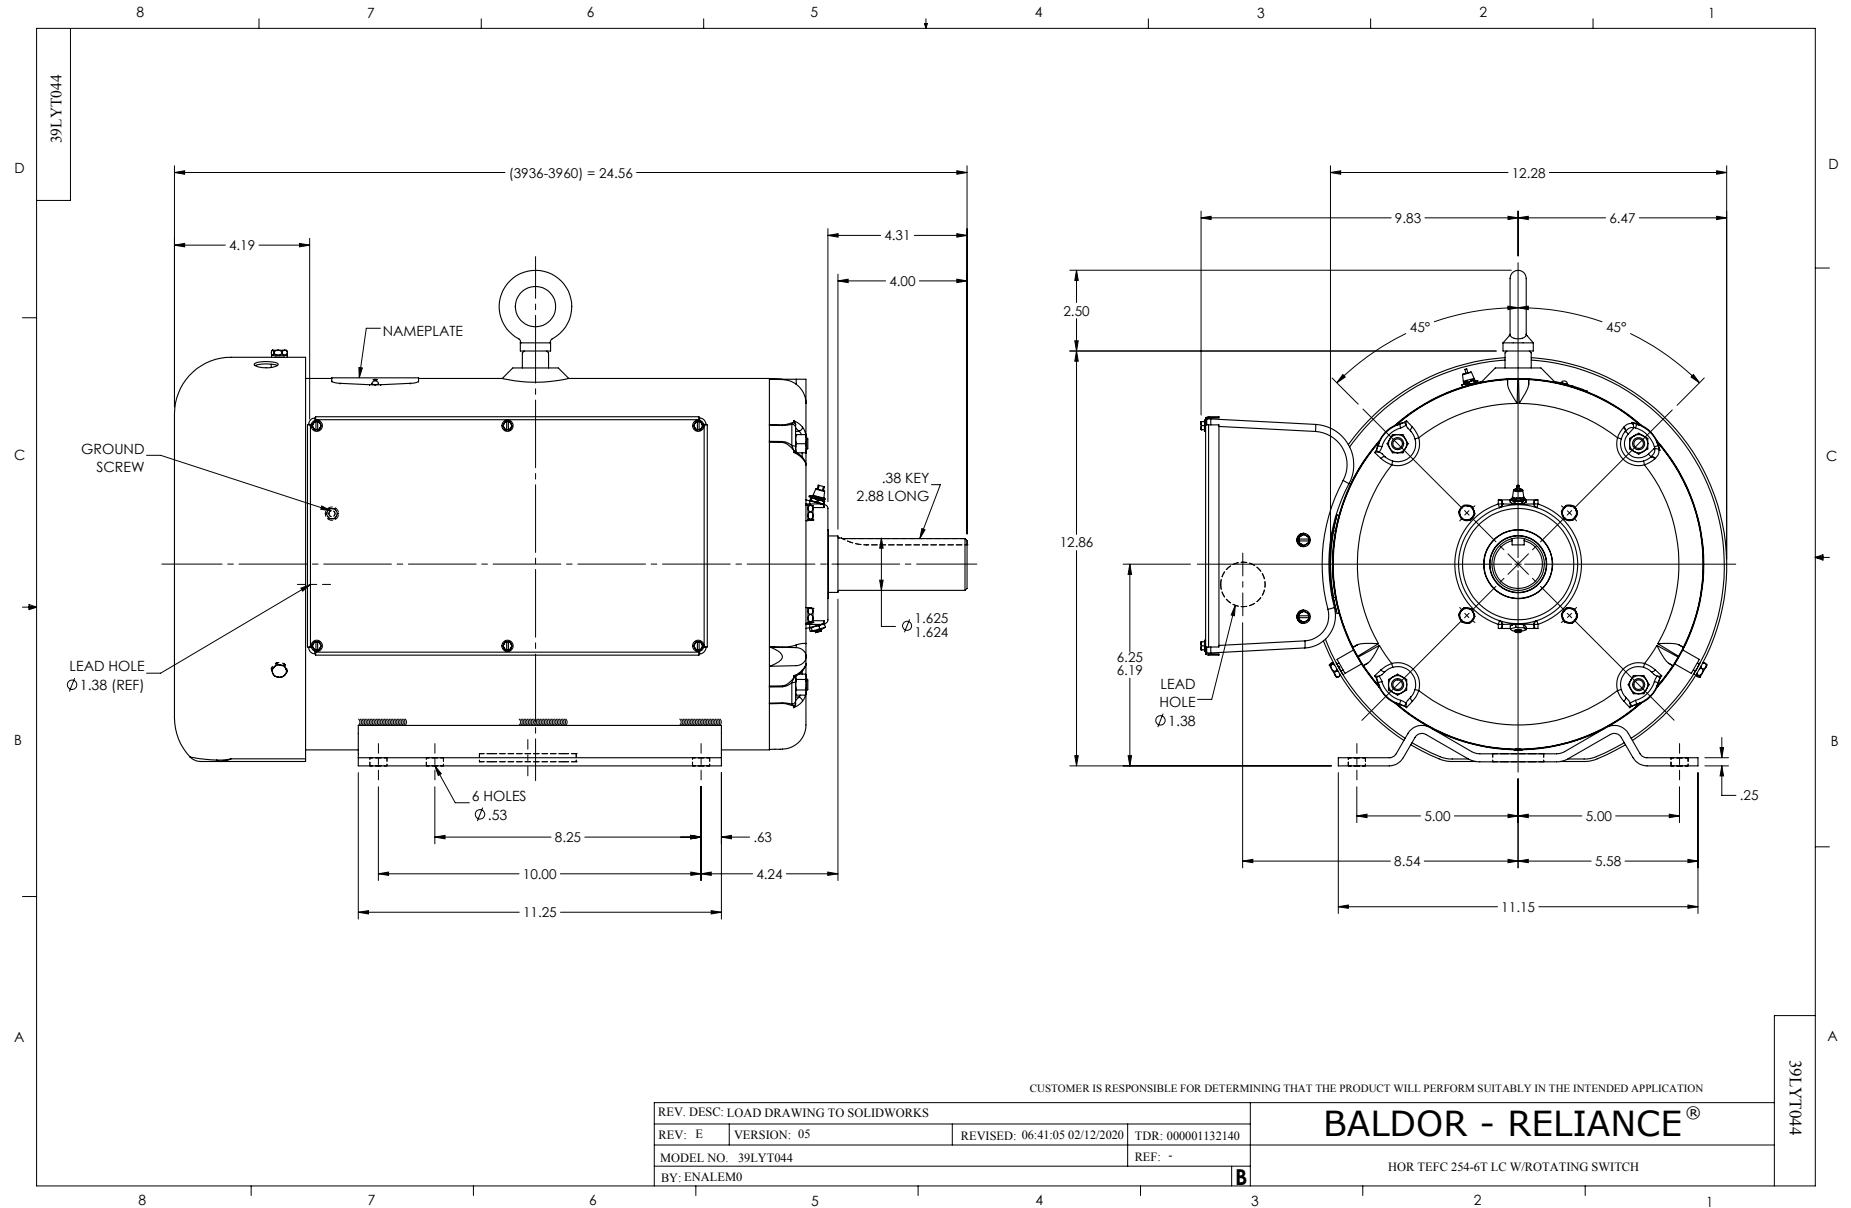

CD1084

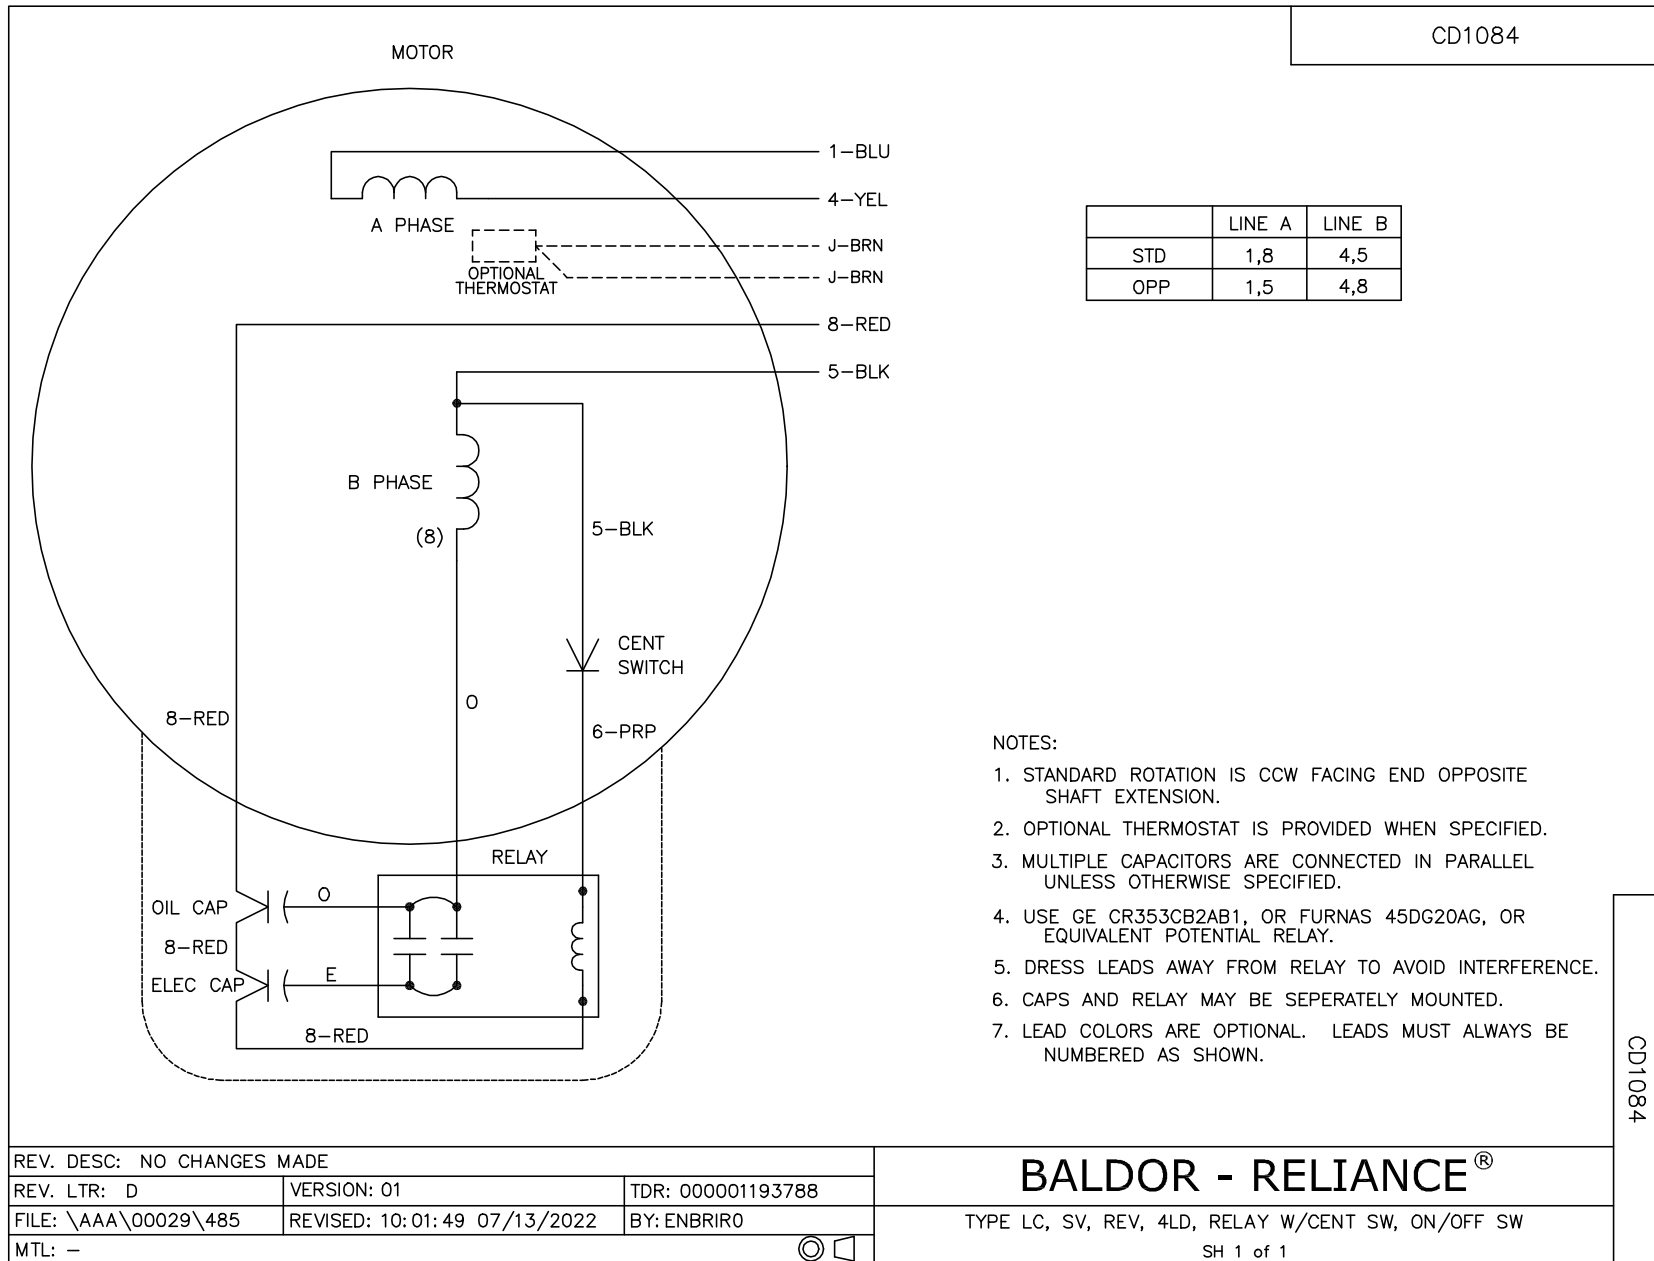

	LINE A	LINE B
STD	1,8	4,5
OPP	1,5	4,8

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. USE GE CR353CB2AB1, OR FURNAS 45DG20AG, OR EQUIVALENT POTENTIAL RELAY.
5. DRESS LEADS AWAY FROM RELAY TO AVOID INTERFERENCE.
6. CAPS AND RELAY MAY BE SEPERATELY MOUNTED.
7. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD1084

REV. DESC: NO CHANGES MADE		
REV. LTR: D	VERSION: 01	TDR: 000001193788
FILE: \AAA\00029\485	REVISED: 10:01:49 07/13/2022	BY: ENBRIRO
MTL: -		

**BALDOR - RELIANCE®**

TYPE LC, SV, REV, 4LD, RELAY W/CENT SW, ON/OFF SW  
SH 1 of 1