ABB BALDOR RELIANCE

Customer information packet

L5000A

.25HP, 1725RPM, 1PH, 60HZ, 56, 3414L, XPFC, F1
Class - CLI GP D; CLII GP F,G
Division - Division I

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/19/2026 1:09:57 AM

Specifications

Enclosure	XPFC
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.250 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ
	208.0 V @ 60 HZ
	230.0 V @ 60 HZ
Agency Approvals	UL
	CSA
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.000 A @ 208.0 V
	2.100 A @ 230.0 V
	4.200 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	62.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part Detail

Revision	Z
Type	AC
Mech. spec.	34-5322
Base	
Status	PRD/A
Elec. spec.	34WGY855
Layout	34LY5322
Eff. date	02-19-2026
CD Diagram	CD0565
Poles	04
Leads	7#18
Proprietary	False
Created date	08-21-2007

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	2.0 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	7 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3414L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	13.22 IN
Power Factor	64
Product Family	Hazardous Location Motor
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	EP

Nameplate

NP0016XPSL							
NO.			**CC**				
SER. #							
SPEC	34-5322Y855G1						
CAT.NO.	L5000A						
H.P.	.25		**T. CODE**		T3C		
VOLTS	115/208-230						
AMPS	4.2/2-2.1						
R.P.M.	1725						
HZ	60	**PH**	1		**CLASS**	B	
SER.F.	1.00		**DES**	N	**CODE**	L	
RATING	40C AMB-CONT						
FRAME	56				**NEMA NOM. EFF**	62	
		PF	64				
BLANK							

AC Induction Motor Performance Data
Record # 36349
Typical performance - not guaranteed values

Winding: 34WGY855-R006	**Type:** 3414L	**Enclosure:** XPFC

Nameplate Data				**230 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			.25	**Full Load Torque**	0.762 LB-FT
Volts			115/208-230	**Start Configuration**	direct on line
Full Load Amps			4.2/2-2.1	**Breakdown Torque**	2.38 LB-FT
R.P.M.			1725	**Pull-up Torque**	1.68 LB-FT
Hz	60	**Phase**	1	**Locked-rotor Torque**	2.83 LB-FT
NEMA Design Code	N	**KVA Code**	L	**Starting Current**	10.8 A
Service Factor (S.F.)			1	**No-load Current**	1.67 A
NEMA Nom. Eff.	62	**Power Factor**	64	**Line-line Res. @ 25ºC**	9.23 Ω A Ph 8.97 Ω B Ph
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	43°C

Load Characteristics 230 V, 60 Hz, 0.25 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	35	47	54	64	69	72
Efficiency	35.2	50	60.6	61.8	65.7	71.6
Speed	1780	1767	1753	1738	1722	1711
Line amperes	1.69	1.78	1.88	2.07	2.23	2.35


ABB Motors and Mechanical Inc.

WINDING # 34WGY855

0.25 HP 1 PH 60 HZ 1725 RPM 230 V 3414L

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=2.38 PU=1.68 LR=2.83 LRA=10.8

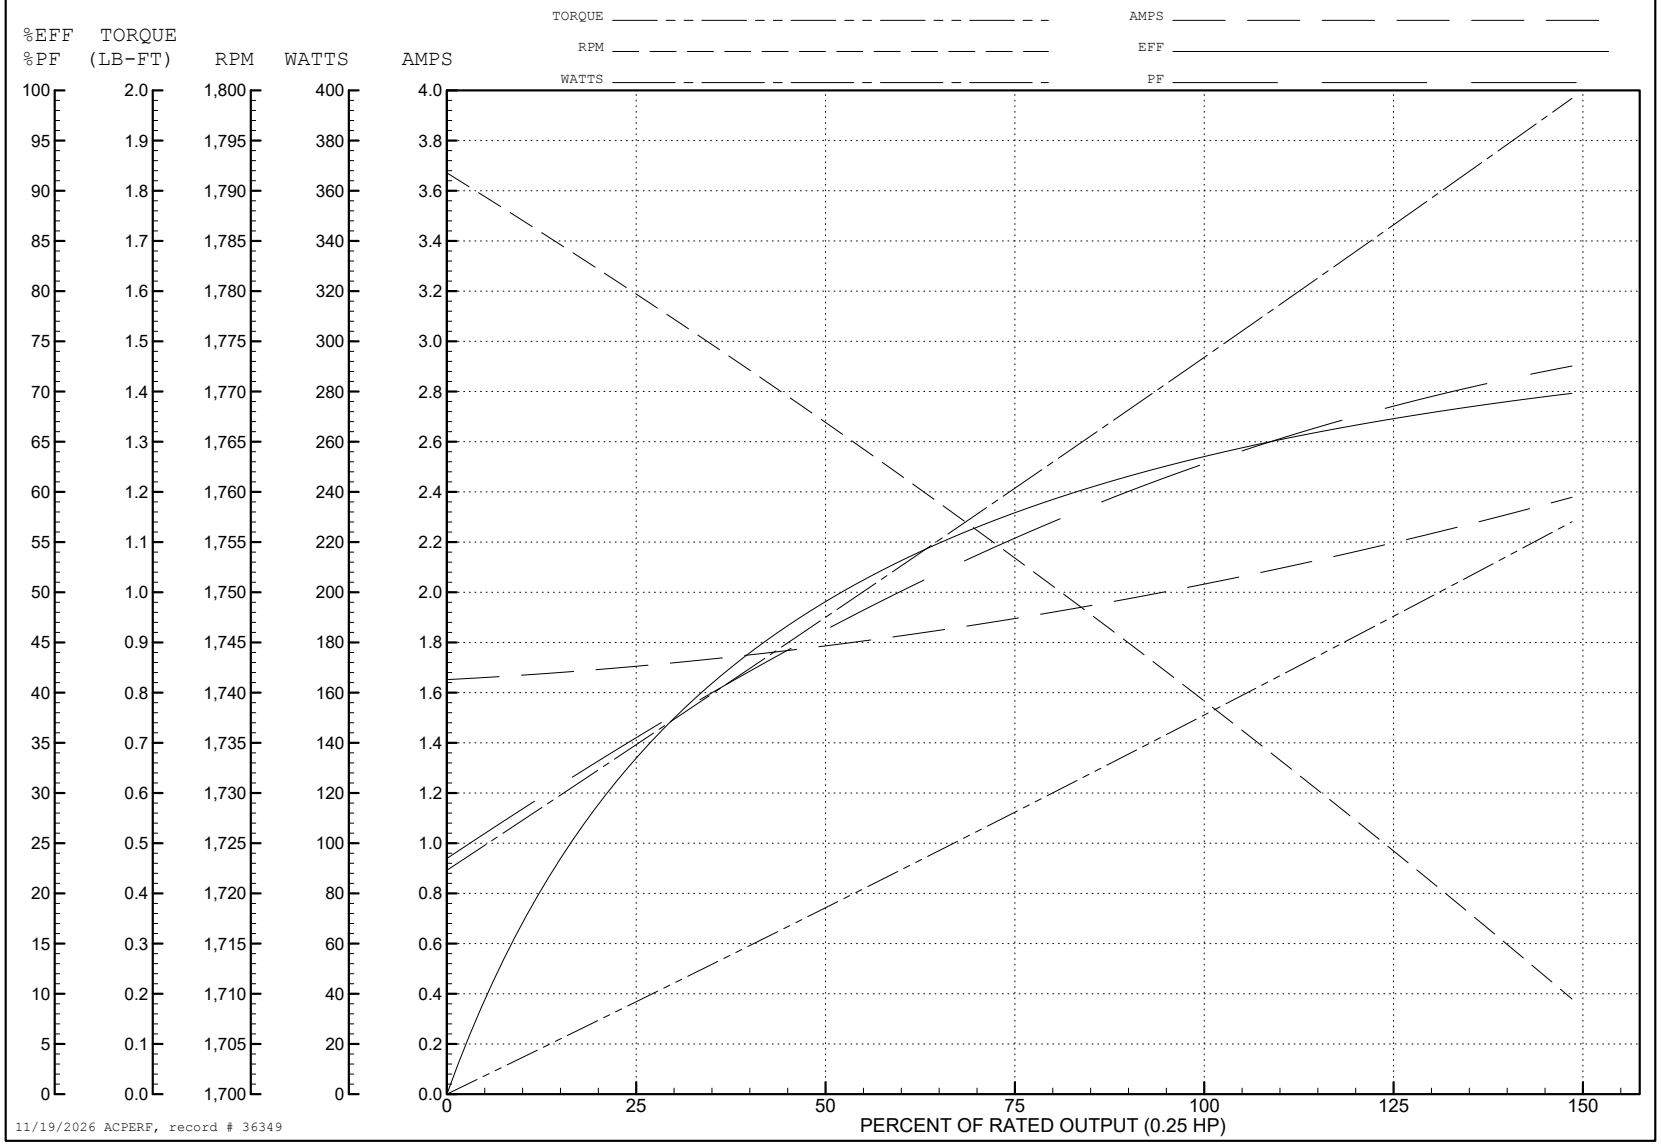

AC Induction Motor Performance Data
Record # 41431
Typical performance - not guaranteed values

Winding: 34WGY855-R006	**Type:** 3414L	**Enclosure:** XPFC

Nameplate Data				**115 V, 60 Hz: Low Voltage Connection**	
Rated Output (HP)			.25	**Full Load Torque**	0.762 LB-FT
Volts			115/208-230	**Start Configuration**	direct on line
Full Load Amps			4.2/2-2.1	**Breakdown Torque**	2.38 LB-FT
R.P.M.			1725	**Pull-up Torque**	1.68 LB-FT
Hz	60	**Phase**	1	**Locked-rotor Torque**	2.83 LB-FT
NEMA Design Code	N	**KVA Code**	L	**Starting Current**	21.6 A
Service Factor (S.F.)			1	**No-load Current**	3.34 A
NEMA Nom. Eff.	62	**Power Factor**	64	**Line-line Res. @ 25ºC**	2.22 Ω A Ph 8.87 Ω B Ph
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	

Load Characteristics 115 V, 60 Hz, 0.25 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	35	47	55	64	69	72
Efficiency	35.2	50	60.6	61.9	65.6	71.2
Speed	1780	1767	1753	1738	1722	1711
Line amperes	3.38	3.56	3.76	4.14	4.46	4.7


ABB Motors and Mechanical Inc.

WINDING # 34WGY855


0.25 HP 1 PH 60 HZ 1725 RPM 115 V 3414L

TORQUES(LB-FT): PO=2.38 PU=1.68 LR=2.83 LRA=21.6


Typical performance - not guaranteed values.

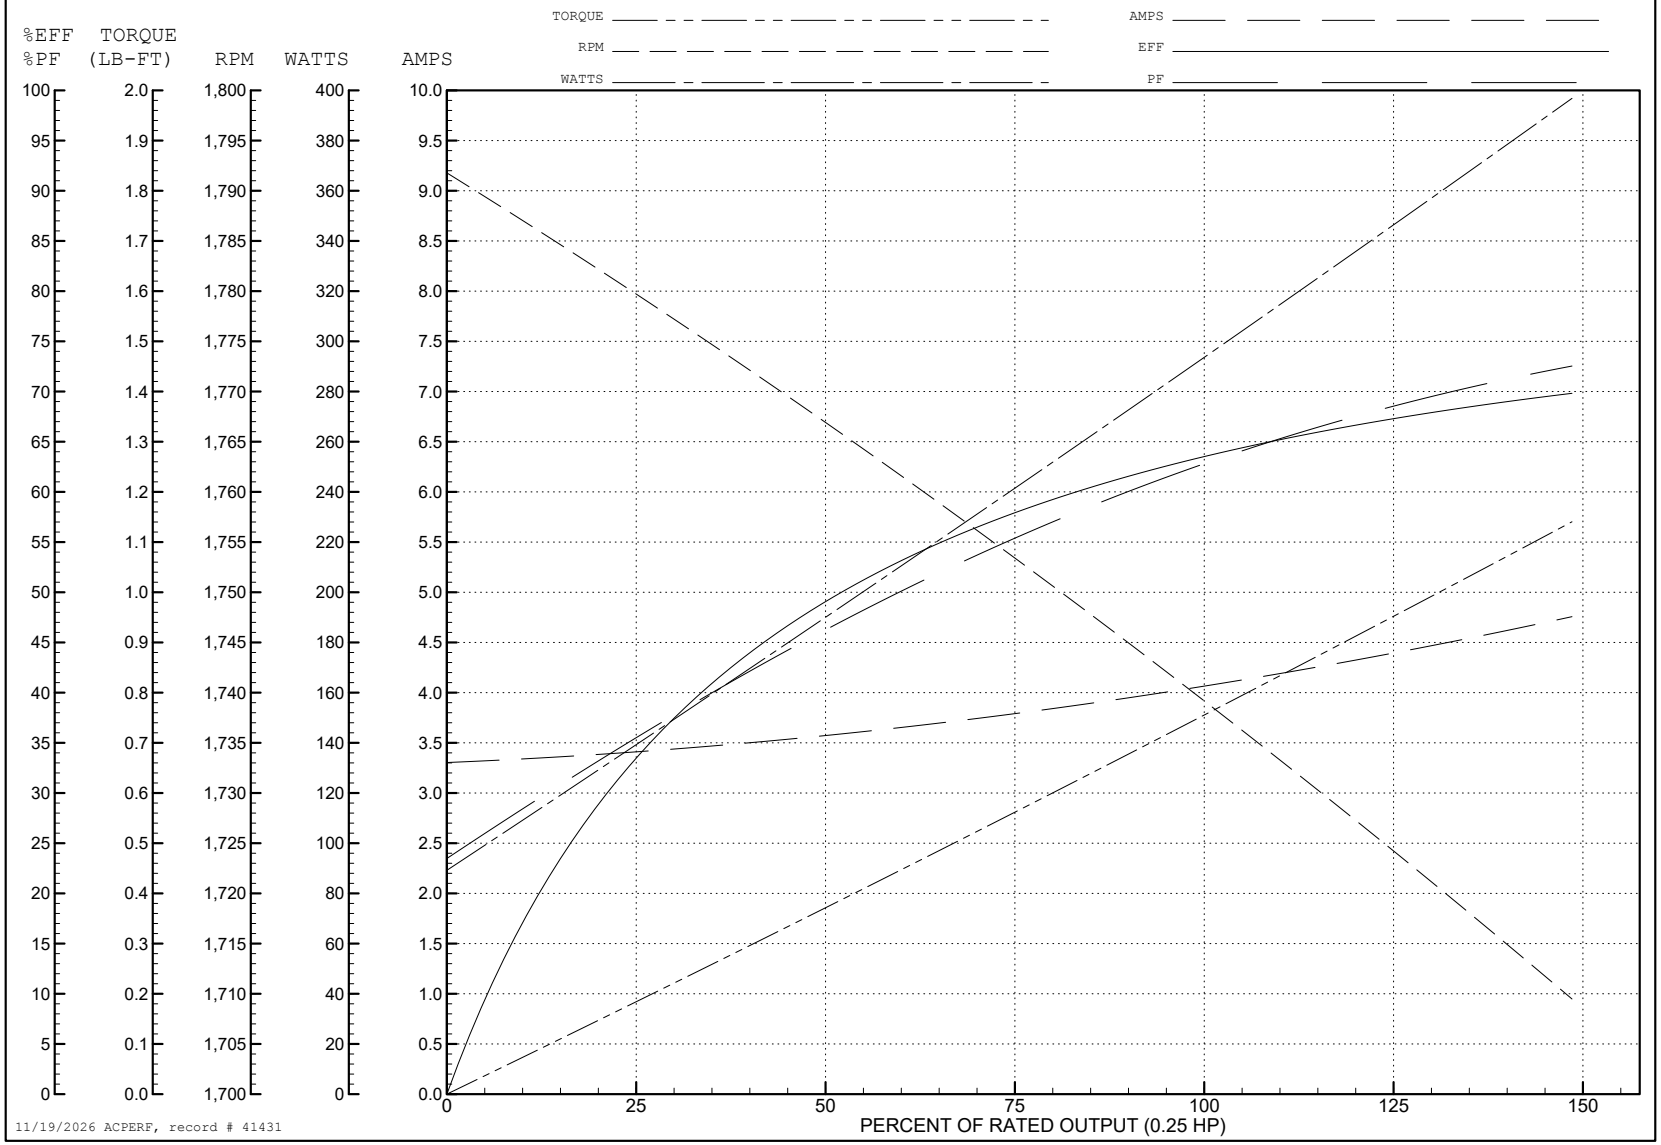

11/19/2026 ACPERF, record # 41431

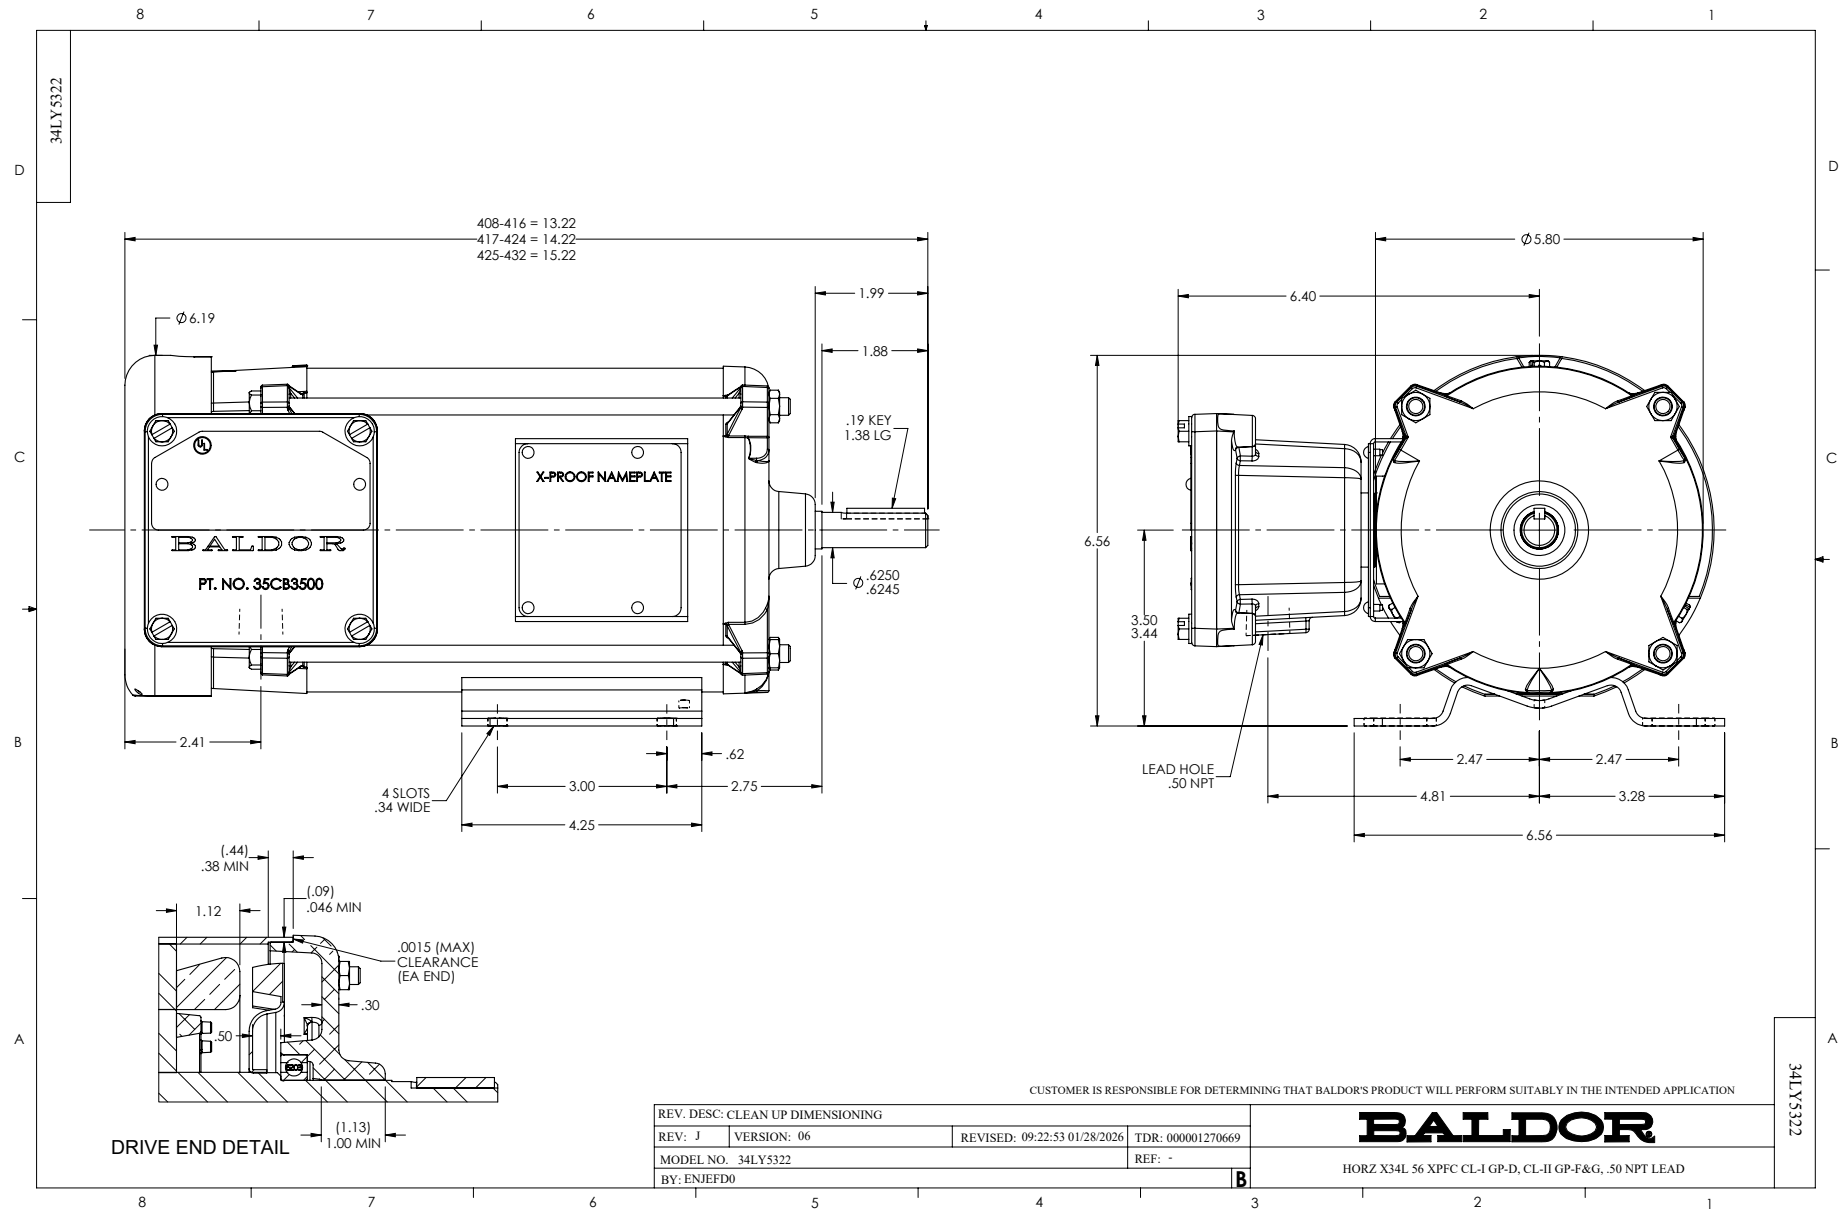
34LY5322
408-416 = 13.22
417-424 = 14.22
425-432 = 15.22
Ø6.19
1.99
1.88
.19 KEY
1.38 LG
X-PROOF NAMEPLATE
BALDOR
PT. NO. 35CB3500
Ø.6250
Ø.6245
2.41
.62
4 SLOTS
.34 WIDE
3.00
2.75
4.25
Ø5.80
6.40
6.56
3.50
3.44
LEAD HOLE
.50 NPT
2.47
2.47
4.81
3.28
6.56
(.44)
.38 MIN
(.09)
.046 MIN
1.12
.0015 (MAX)
CLEARANCE
(EA END)
.30
.50
(1.13)
1.00 MIN
DRIVE END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CLEAN UP DIMENSIONING
REV: J
VERSION: 06
REVISED: 09:22:53 01/28/2026
TDR: 000001270669
MODEL NO. 34LY5322
REF: -
BY: ENJEFD0
B
BALDOR
HORZ X34L 56 XPFC CL-I GP-D, CL-II GP-F&G, .50 NPT LEAD
34LY5322

CD0565

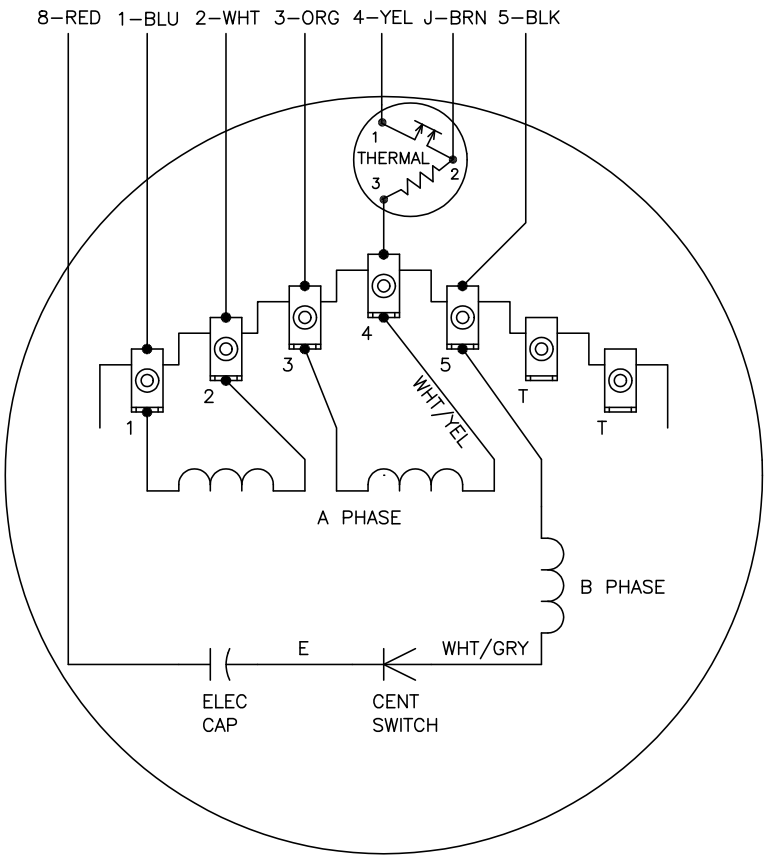


	LINE A	LINE B	JOIN	JOIN
HIGH STD	1	4	2,3,8	J,5
HIGH OPP	1	4	2,3,5	J.8
LOW STD	1,3,8	4	–	2,J,5
LOW OPP	1,3,5	4	–	2,J,8

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CONNECTIONS FOR TWO–TERMINAL THERMAL



CD0565

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: C	BY: JLP	REVISED: 04/08/99 3:25	TDR: 0178636
CD0565		FILE: AAA00014311	MDL: –
		MTL: –	

BALDOR ELECTRIC Co.

TYPE L, DV, REV, THERMAL, 7 LD, 34XP