

BALDOR • RELIANCE

Customer information packet

M1758T

5/1.3HP, 1725/850RPM, 3PH, 60HZ, 184T, 3640M

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ 1.300 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
XP Class and Group	None
XP Division	Not Applicable
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.700 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.5 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	Y
Type	AC
Mech. spec.	36A001
Base	
Status	PRD/A
Elec. spec.	36WGW388
Layout	36LYA001
Eff. date	07-14-2022
CD Diagram	CD0032
Poles	04/08
Leads	6#16
Proprietary	False
Created date	01-01-0001

KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3640M
Mounting Arrangement	F1
Number of Poles	4 8
Overall Length	18.04 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm 850 rpm
Speed Code	2S-1W-VT
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M1758T								
SPEC.	36A01W388								
HP	5/1.3								
VOLTS	460								
AMP	6.7/2.5								
RPM	1725/850								
FRAME	184T		HZ	60		PH	3		
SER.F.	1.15	CODE	K	DES	B	CLASS	F		
NEMA-NOM-EFF		PF							
RATING	40C AMB-CONT								
CC		USABLE AT 208V							
DE	6206	ODE	6205						
ENCL	TEFC	SN							

Accessories

Part number	Description	Multiplier
36-3301	C FACE KIT	A8
36EP1304A62SP	FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS	A8

AC Induction Motor Performance Data

Record # 36959

Typical performance - not guaranteed values

Winding: 36WGW388-R005		Type: 3640M	Enclosure: TEFC		
Nameplate Data		460 V, 60 Hz: High Speed Connection			
Rated Output (HP)	5/1.3	Full Load Torque	15.1 LB-FT		
Volts	460	Start Configuration	direct on line		
Full Load Amps	6.7/2.5	Breakdown Torque	58 LB-FT		
R.P.M.	1725/850	Pull-up Torque	34 LB-FT		
Hz	60 Phase	3	Locked-rotor Torque	34 LB-FT	
NEMA Design Code	B	KVA Code	K	Starting Current	54.1 A
Service Factor (S.F.)		1.15	No-load Current	3.5 A	
NEMA Nom. Eff.	0	Power Factor	0	Line-line Res. @ 25°C	3.75 Ω
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load	75°C	
S.F. Amps			Temp. Rise @ S.F. Load	89°C	

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	43	64	75	81	85	86	83
Efficiency	74.1	83	85.3	86	85.1	83.7	85.5
Speed	1785	1771	1756	1741	1721	1701	1729
Line amperes	3.8	4.5	5.5	6.7	8	9.6	7.48


ABB Motors and Mechanical Inc.

WINDING # 36WG388

5 HP 3 PH 60 HZ 1741 RPM 460 V 3640M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=58 PU=34 LR=34 LRA=54.1

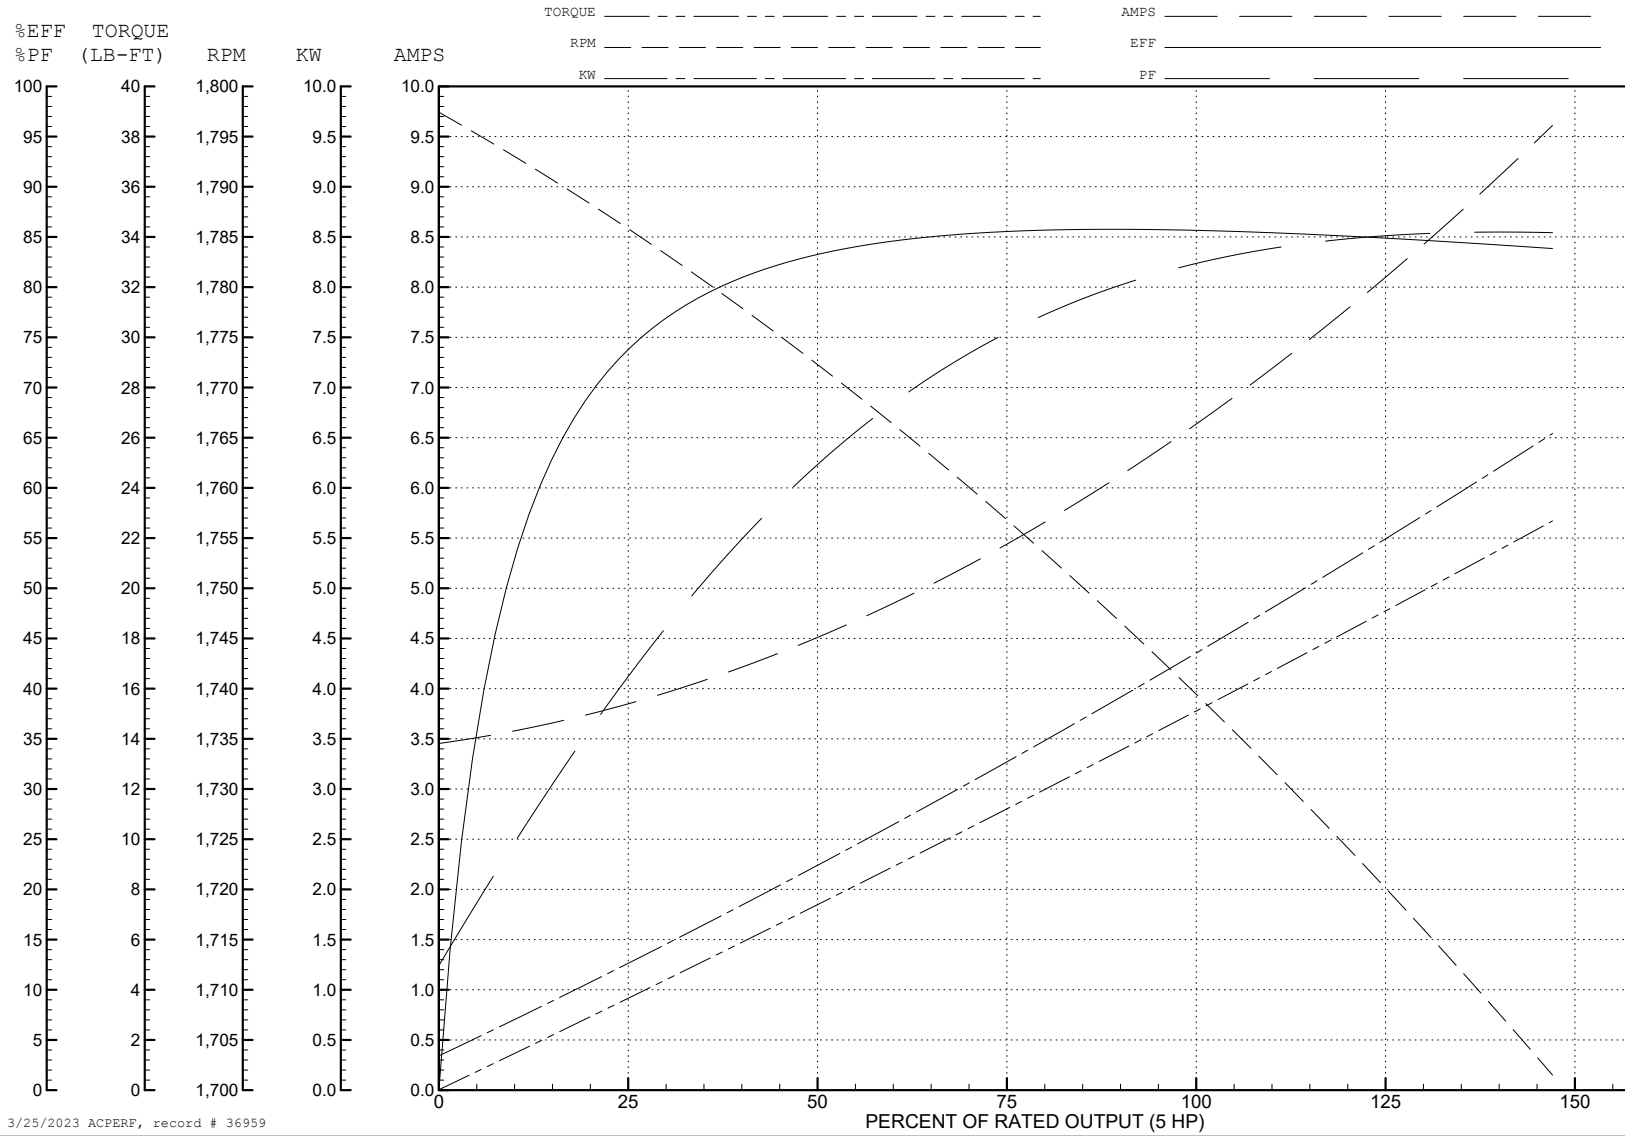

3/25/2023 ACPERF, record # 36959

AC Induction Motor Performance Data

Record # 36960

Typical performance - not guaranteed values

Winding: 36GW388-R005		Type: 3640M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: Low Speed Connection		
Rated Output (HP)	5/1.3		Full Load Torque	7.6 LB-FT	
Volts	460		Start Configuration	direct on line	
Full Load Amps	6.7/2.5		Breakdown Torque	19.8 LB-FT	
R.P.M.	1725/850		Pull-up Torque	12.5 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque	13 LB-FT	
NEMA Design Code	B KVA Code	K	Starting Current	11 A	
Service Factor (S.F.)	1.15		No-load Current	2 A	
NEMA Nom. Eff.	0 Power Factor	0	Line-line Res. @ 25°C	15 Ω	
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	64°C	
S.F. Amps			Temp. Rise @ S.F. Load	74°C	

Load Characteristics 460 V, 60 Hz, 1.3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	28	41	54	65	69	73	67
Efficiency	52	65.7	70.8	72.3	72.1	70.8	72.2
Speed	890	881	871	862	847	834	853
Line amperes	2.1	2.2	2.3	2.5	2.9	3.3	2.74


ABB Motors and Mechanical Inc.

WINDING # 36WGW388


1.3 HP 3 PH 60 HZ 862 RPM 460 V 3640M

Typical performance - not guaranteed values.


TORQUES (LB-FT): PO=19.8 PU=12.5 LR=13 LRA=11

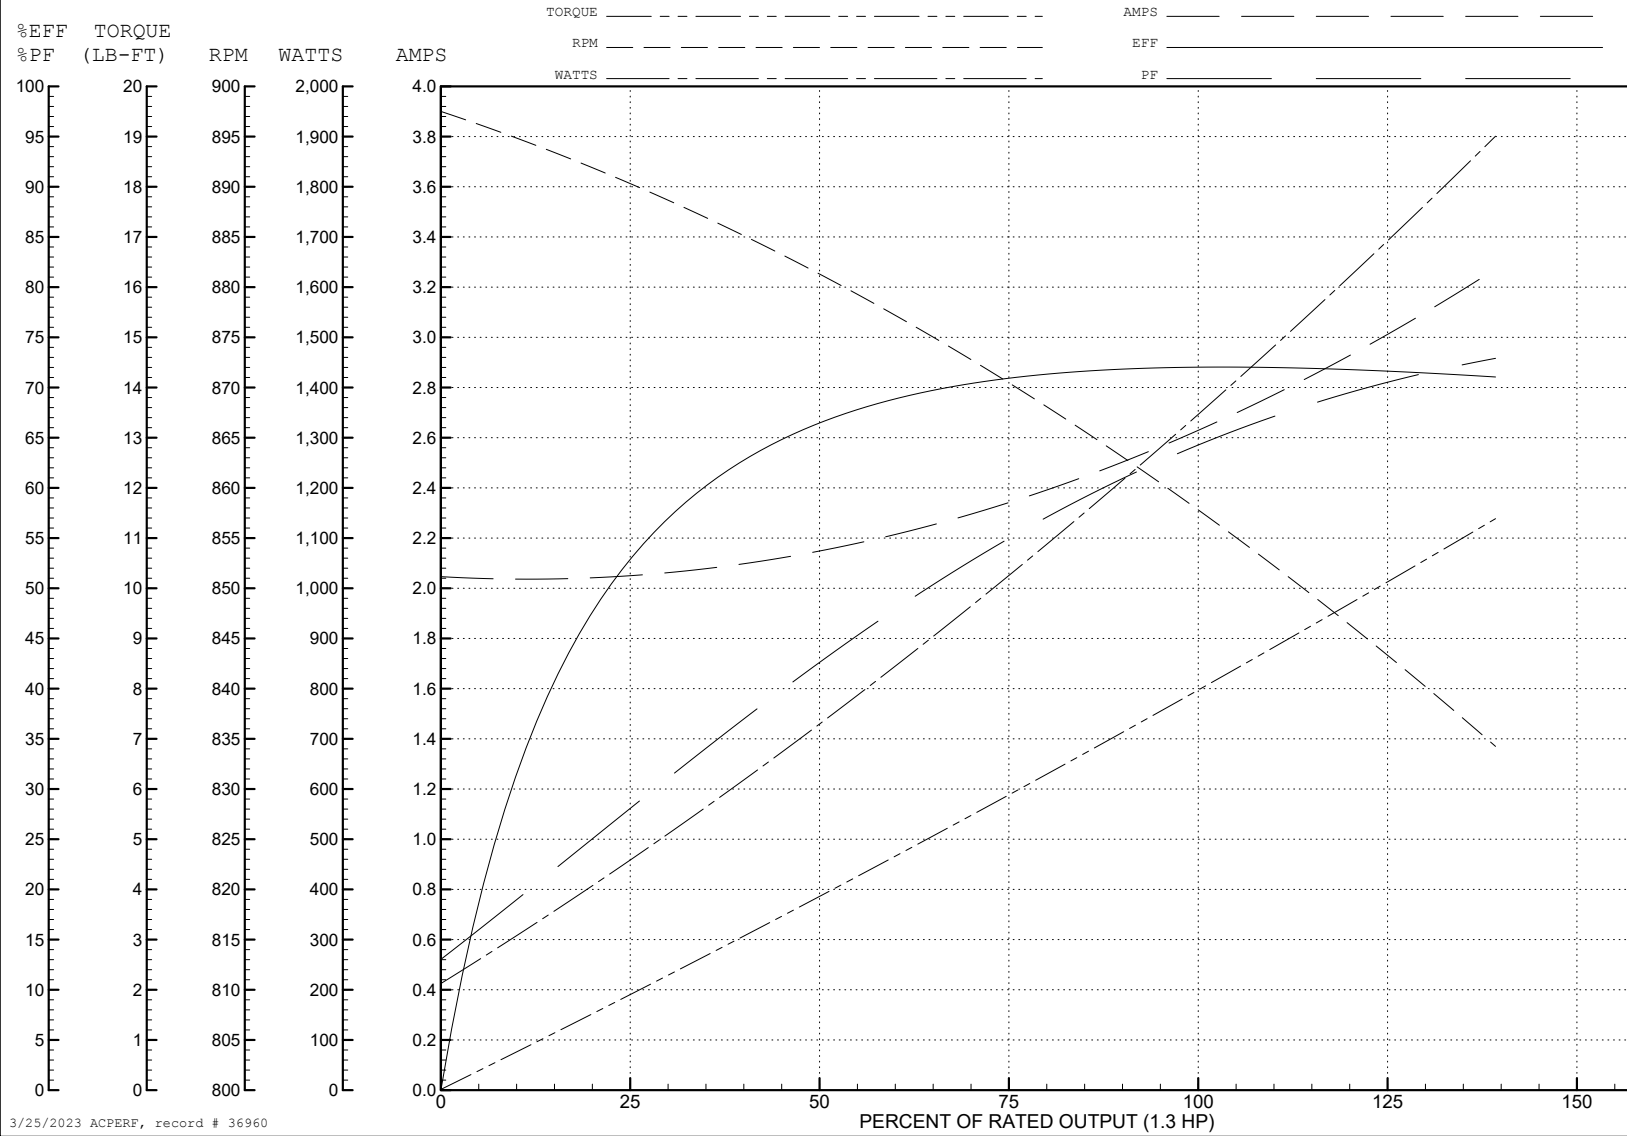


3/25/2023 ACPERF, record # 36960

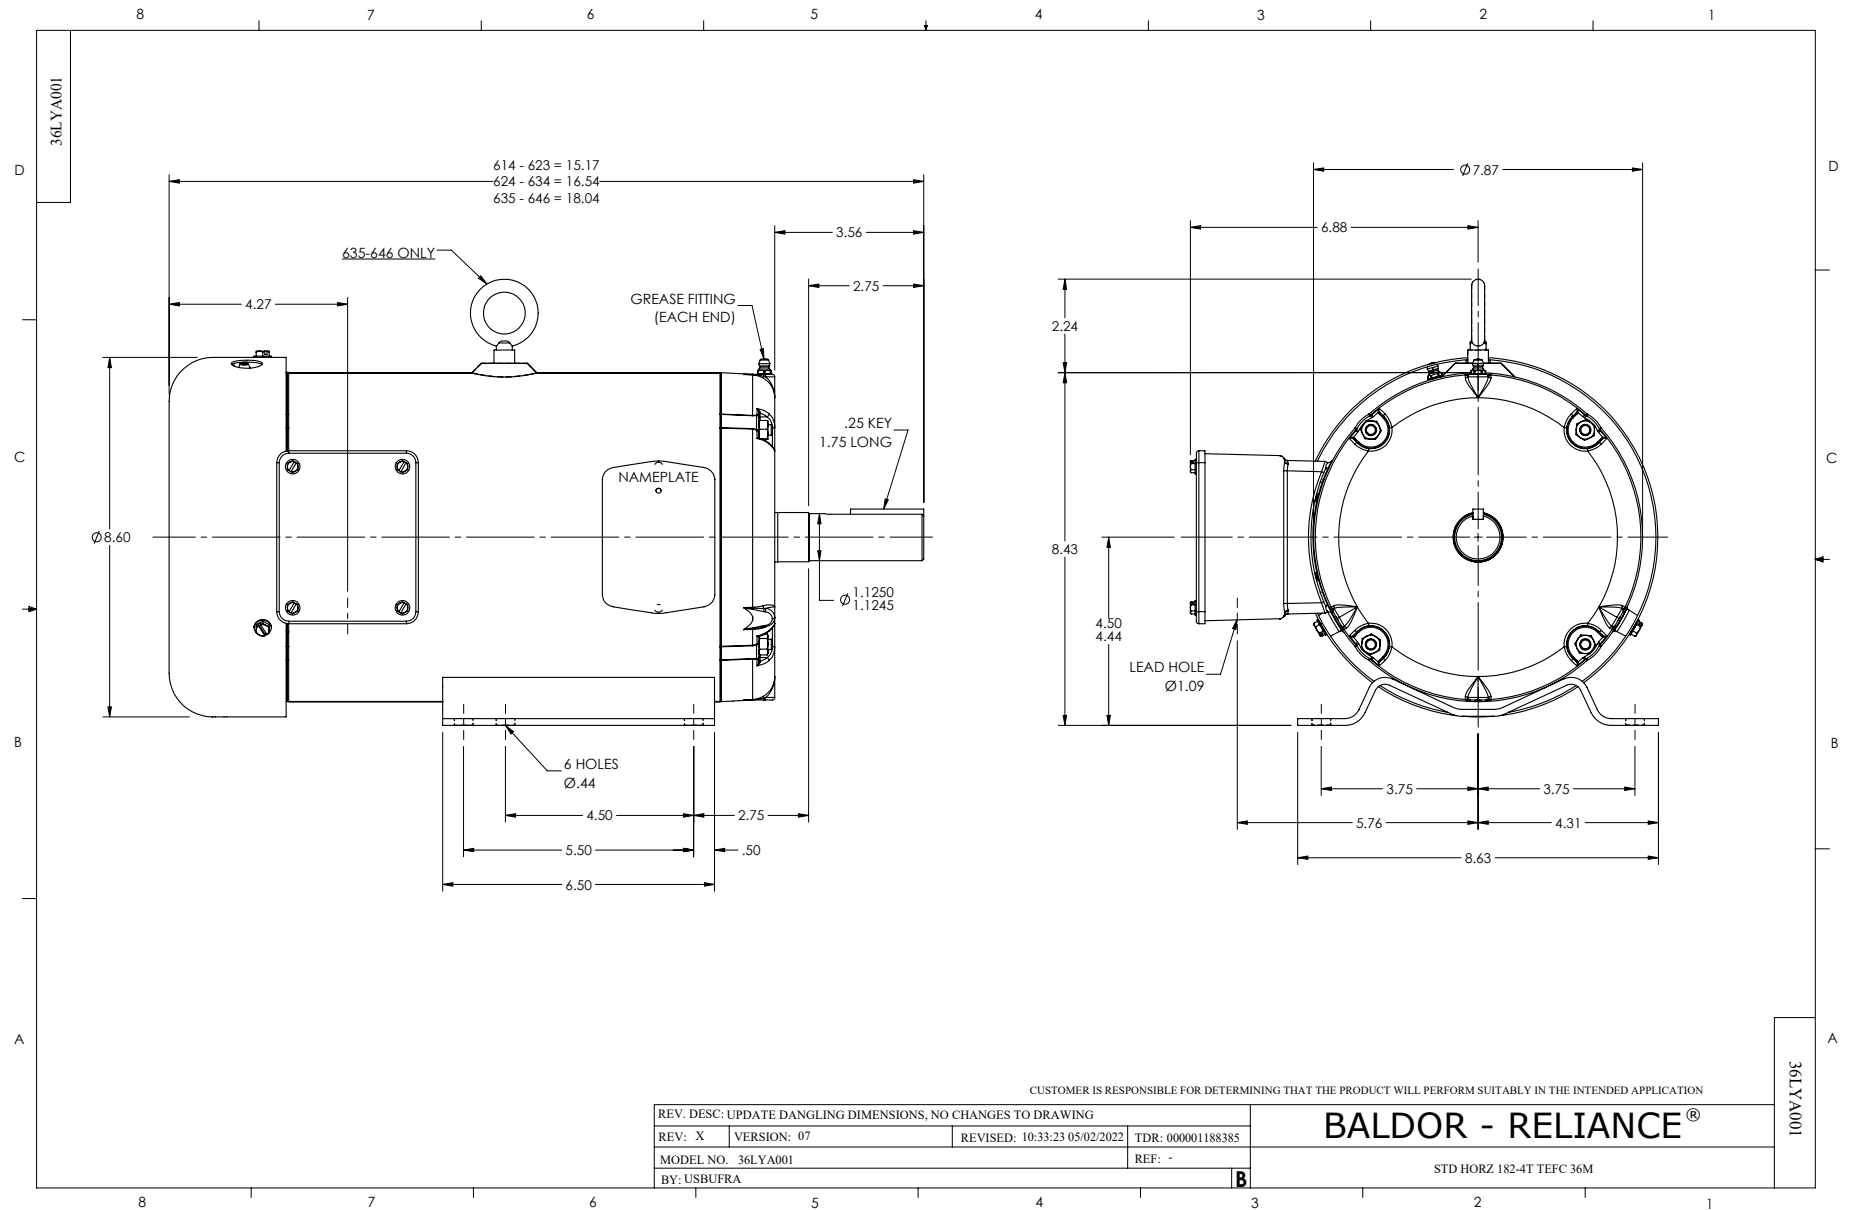

CD0032

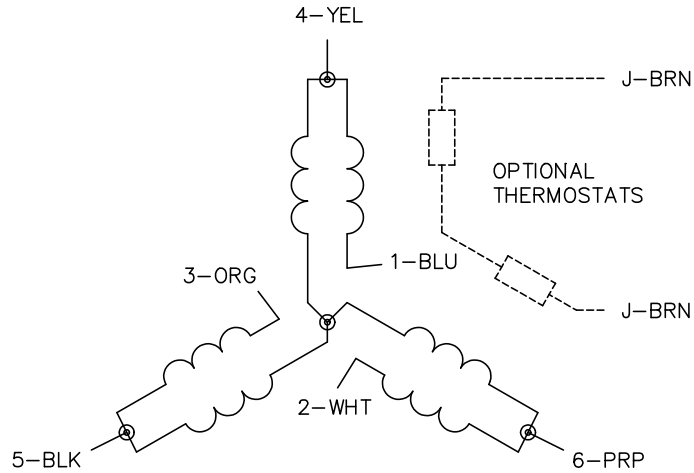


LOW SPEED
(1Y)



LINE

HIGH SPEED
(2Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0032

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/22/99 8:27	TDR: 0171435
CD0032		FILE: AAA00005145	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, SV, 6 LEADS, 2-SPEED 1-WINDING VARIABLE TORQUE