

ABB BALDOR RELIANCE III

Customer information packet

M3455

.25HP, 1140RPM, 3PH, 60HZ, 48, 3411M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	48
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.250 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.700 A @ 460.0 V 1.400 A @ 230.0 V 1.600 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	68.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	0.7 a

Part Detail

Revision	R
Type	AC
Mech. spec.	34A051
Base	
Status	PRD/A
Elec. spec.	34WG5882
Layout	34LYA051
Eff. date	12-30-2024
CD Diagram	CD0005
Poles	06
Leads	9#18
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3411M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	10.73 IN
Power Factor	51
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.35
Shaft Diameter	0.500 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1140 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M3455								
SPEC.	34A51-5882								
HP	.25								
VOLTS	230/460								
AMP	1.4/.7								
RPM	1140								
FRAME	48		HZ		60		PH		3
SER.F.	1.35	CODE		K	DES	B	CLASS		B
NEMA-NOM-EFF	68	PF		51					
RATING	40C AMB-CONT								
CC									
DE	6203		ODE		6203				
ENCL	TEFC	SN							
	SFA 1.5/.75								

Accessories

Part number	Description	Multiplier
34-3900T	C-FACE KIT	A8

AC Induction Motor Performance Data

Record # 6830

Typical performance - not guaranteed values

Winding: 34WG5882-R001				Type: 3411M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.25		Full Load Torque		1.15 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		1.4/.7		Breakdown Torque		3.8 LB-FT	
R.P.M.		1140		Pull-up Torque		2.9 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		3 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		2.5 A
Service Factor (S.F.)		1.35		No-load Current		0.57 A	
NEMA Nom. Eff.		68	Power Factor	51	Line-line Res. @ 25°C		80.7 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		41°C	
S.F. Amps		1.5/.75		Temp. Rise @ S.F. Load		53°C	

Load Characteristics 460 V, 60 Hz, 0.25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	24	34	43	51	58	61	61
Efficiency	44	57	64	67.4	68	67.7	68.2
Speed	1184	1171	1157	1139	1122	1109	1115
Line amperes	0.57	0.6	0.63	0.68	0.73	0.78	0.75


ABB Motors and Mechanical Inc.

WINDING # 34WG5882



Typical performance - not guaranteed values.

0.25 HP 3 PH 60 HZ 1140 RPM 460 V 3411M

TORQUES (LB-FT) : PO=3.8 PU=2.9 LR=3 LRA=2.5

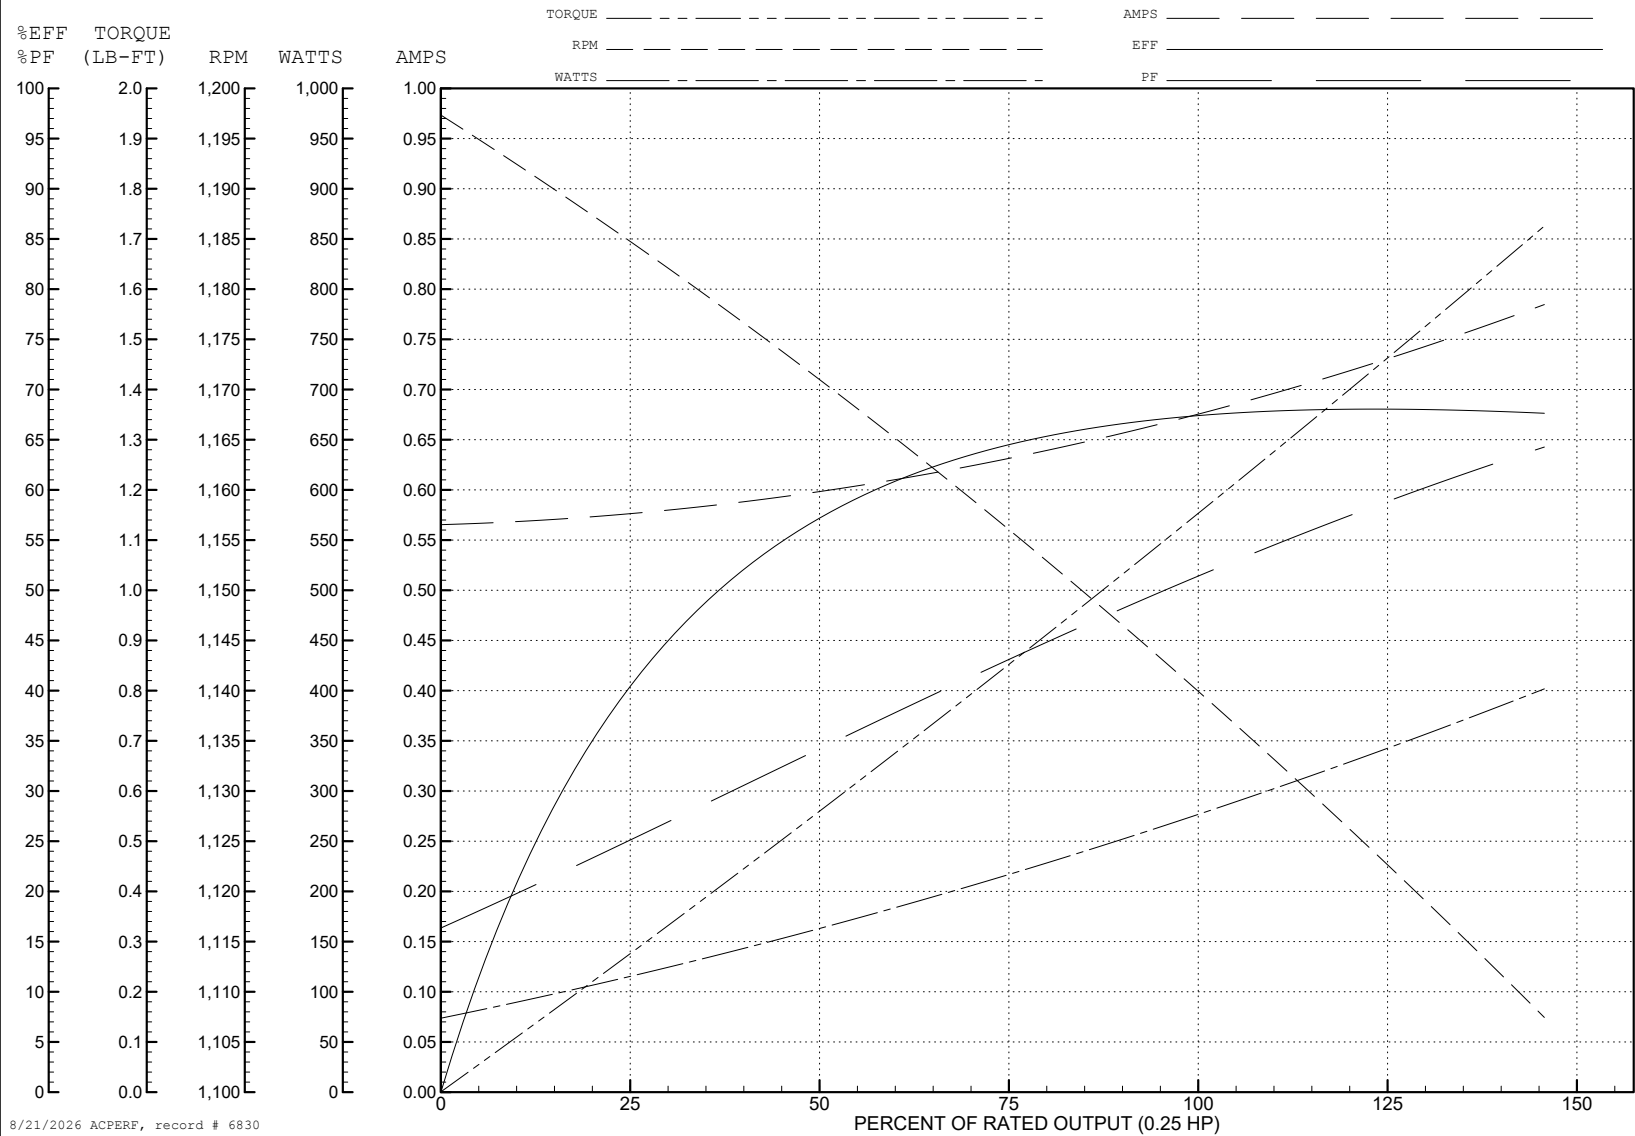

34LYA051

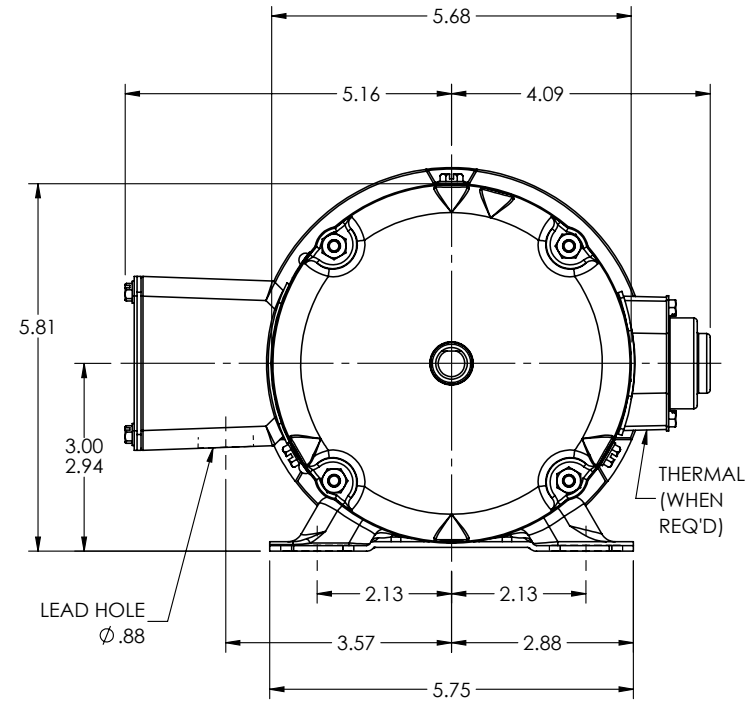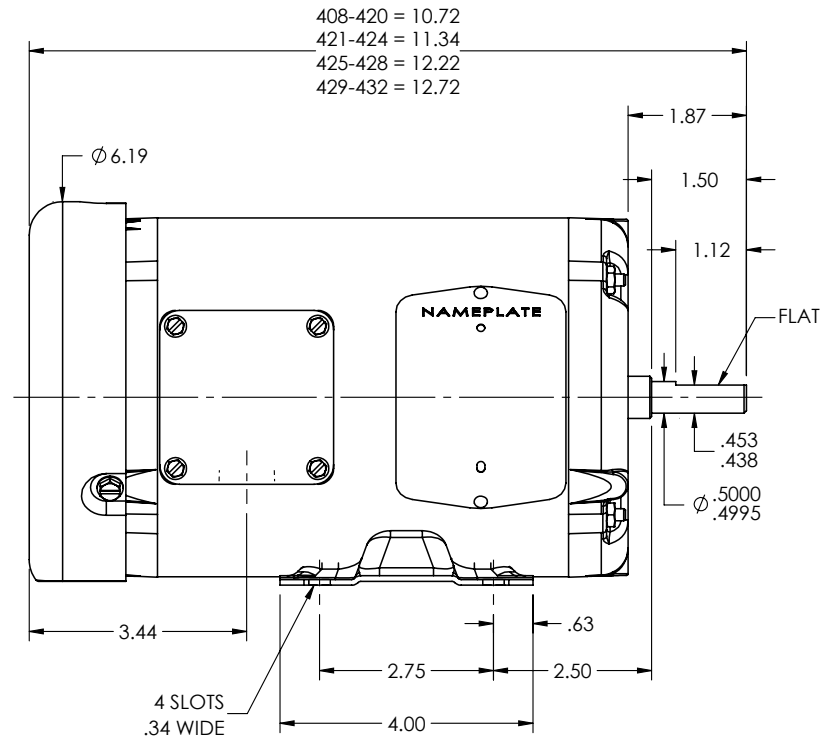

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: UPDATE DIMENSION GRAPHICS

REV: P

VERSION: 07

REVISED: 03:05:58 11/26/2024

TDR: 000001245356

34LYA051

MODEL NO. 34LYA051

BY: ENJEFD0

REF: -

BALDOR - RELIANCE®

STD HORZ 34M NEMA 48 TEFC

34LYA051

