

ABB BALDOR RELIANCE III

Customer information packet

M6002A

.25HP, 1725RPM, 3PH, 60HZ, 48, X3410M, XPFC, F1

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	48
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	.250 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	208.0 V @ 60 HZ 230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UL CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.650 A @ 460.0 V 1.300 A @ 230.0 V 1.400 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	63.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part Detail

Revision	AG
Type	AC
Mech. spec.	34-5427
Base	
Status	PRD/A
Elec. spec.	34WG5724
Layout	34LY5427
Eff. date	02-19-2026
CD Diagram	CD0007
Poles	04
Leads	12#18
Proprietary	False
Created date	01-01-0001

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	0.7 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3410M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.85 IN
Power Factor	56
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.500 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB

Nameplate

NP0016XPSL					
NO.		CC			
SER. #					
SPEC	34-5427-5724				
CAT.NO.	M6002A				
H.P.	.25	T. CODE	T3C		
VOLTS	208-230/460				
AMPS	1.4-1.3/.65				
R.P.M.	1725				
HZ	60	PH	3	CLASS	B
SER.F.	1.00	DES	B	CODE	L
RATING	40C AMB-CONT				
FRAME	48	NEMA NOM. EFF			63
	PF	56			
BLANK					

AC Induction Motor Performance Data

Record # 16504

Typical performance - not guaranteed values

Winding: 34WG5724-R001			Type: 3410M		Enclosure: XPFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		0.25		Full Load Torque		0.75 LB-FT
Volts		208-230/460		Start Configuration		direct on line
Full Load Amps		1.4-1.3/0.65		Breakdown Torque		3.47 LB-FT
R.P.M.		1725		Pull-up Torque		2.27 LB-FT
Hz	60	Phase	3	Locked-rotor Torque		2.57 LB-FT
NEMA Design Code		B	KVA Code	Starting Current		3.45 A
Service Factor (S.F.)		1		No-load Current		0.6 A
NEMA Nom. Eff.		63	Power Factor	Line-line Res. @ 25°C		70.7 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		

Load Characteristics 460 V, 60 Hz, 0.25 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	23	33	43	54	60	68
Efficiency	40.1	55.5	62.5	64	64.9	64.5
Speed	1785	1772	1758	1743	1729	1713
Line amperes	0.64	0.65	0.66	0.67	0.74	0.79


ABB Motors and Mechanical Inc.


WINDING # 34WG5724

Typical performance - not guaranteed values.



0.25 HP 3 PH 60 HZ 1725 RPM 460 V 3410M

TORQUES (LB-FT) : PO=3.47 PU=2.27 LR=2.57 LRA=3.45

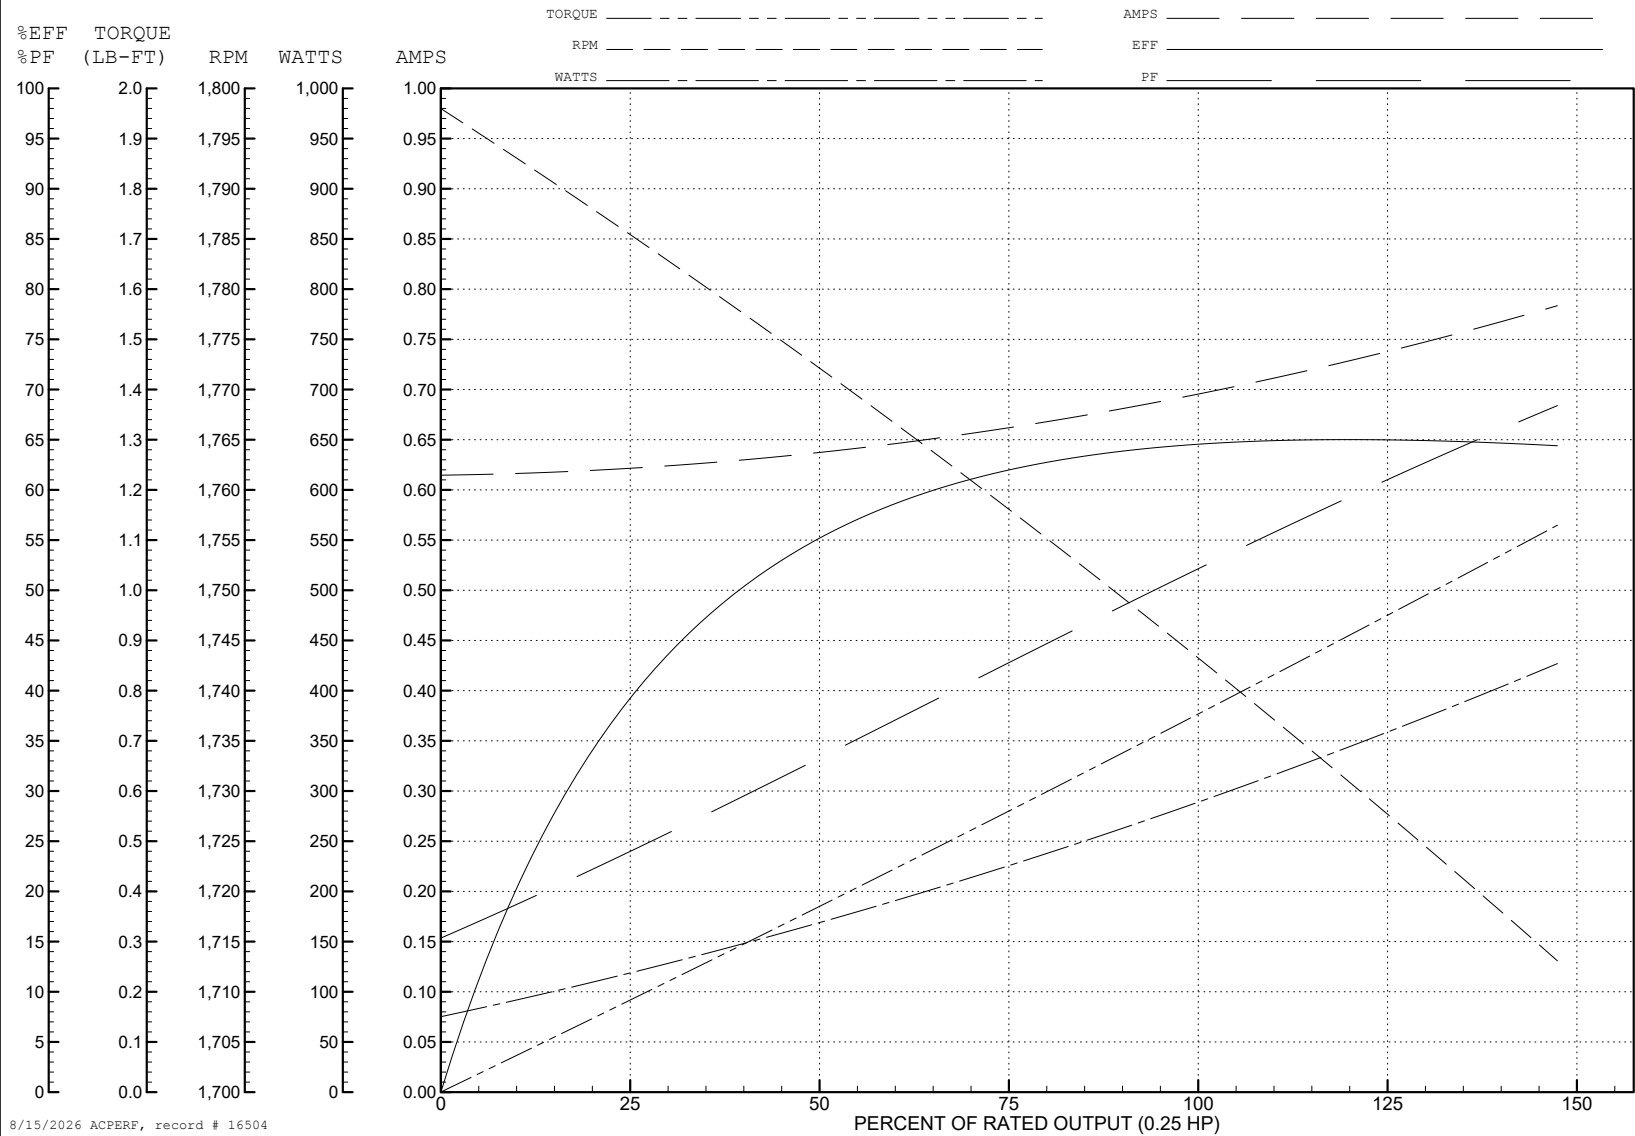

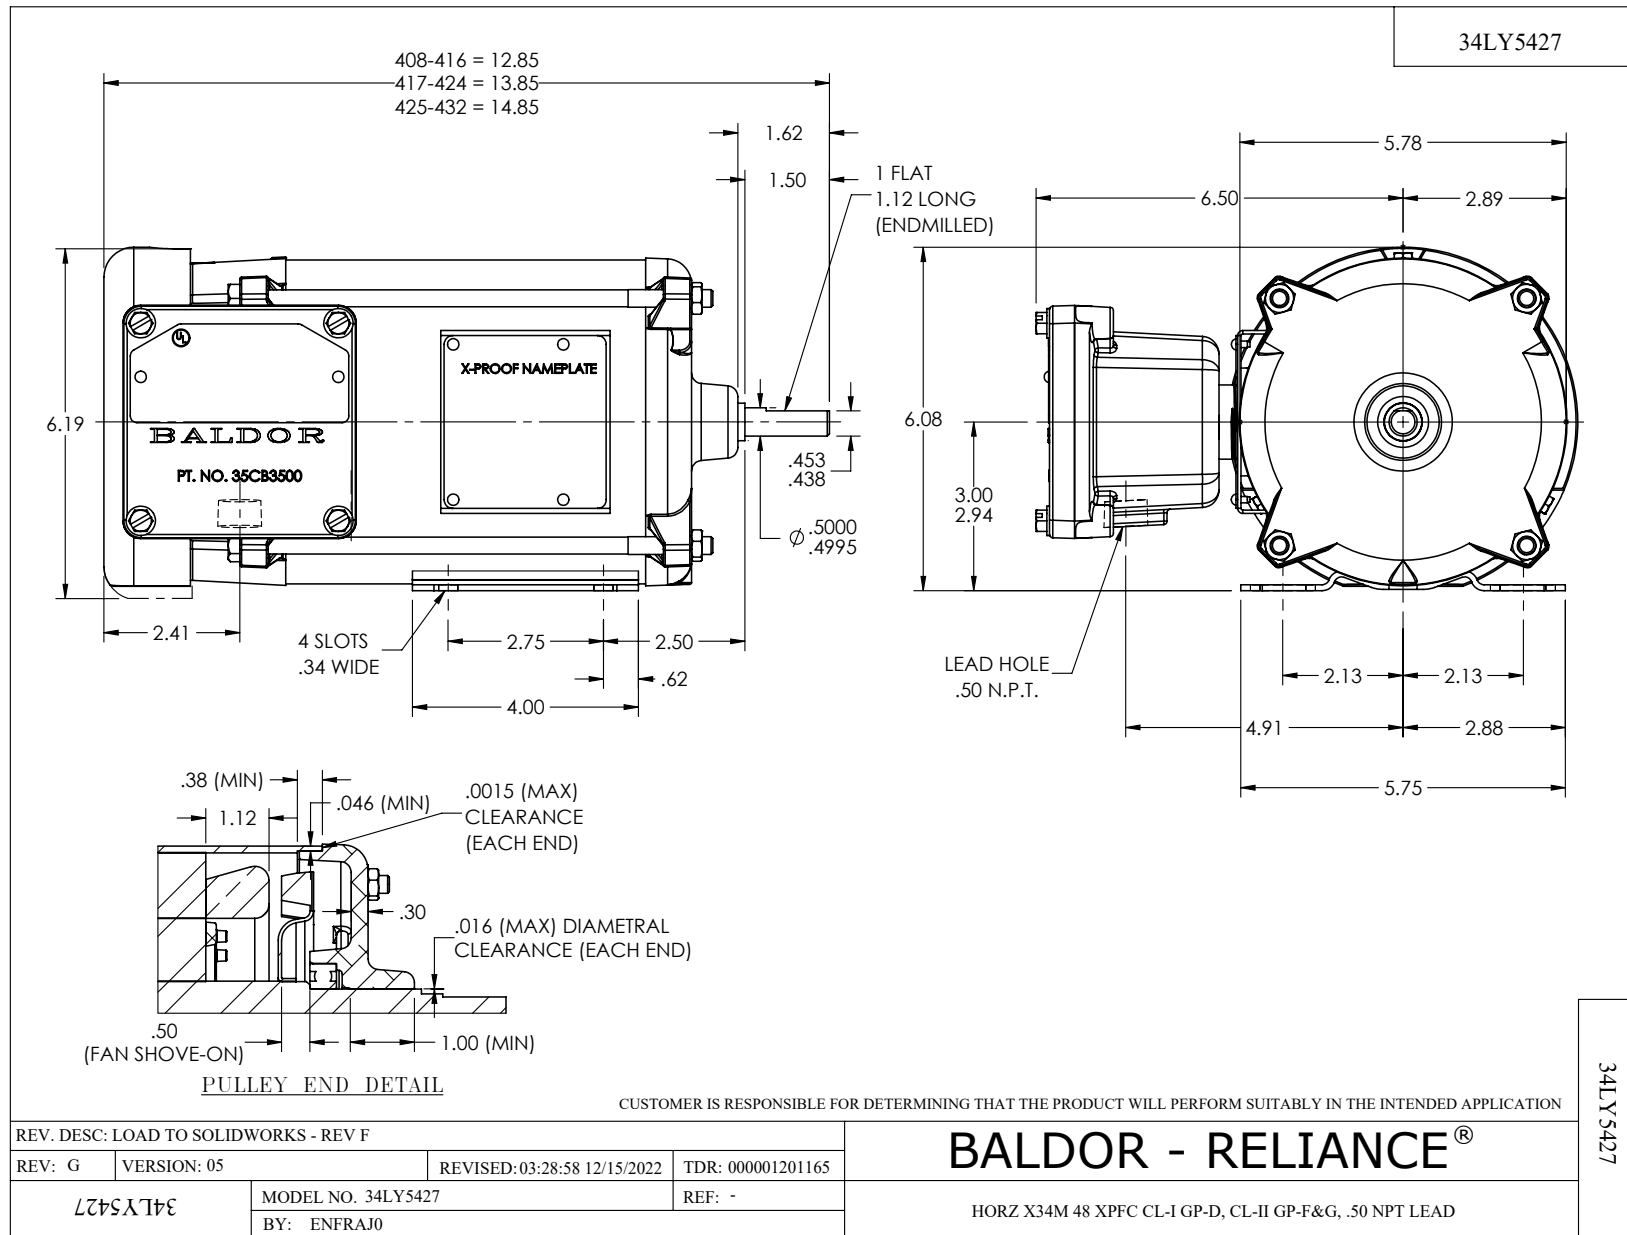

CD0007

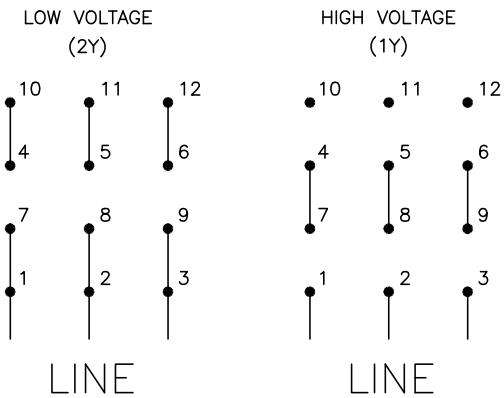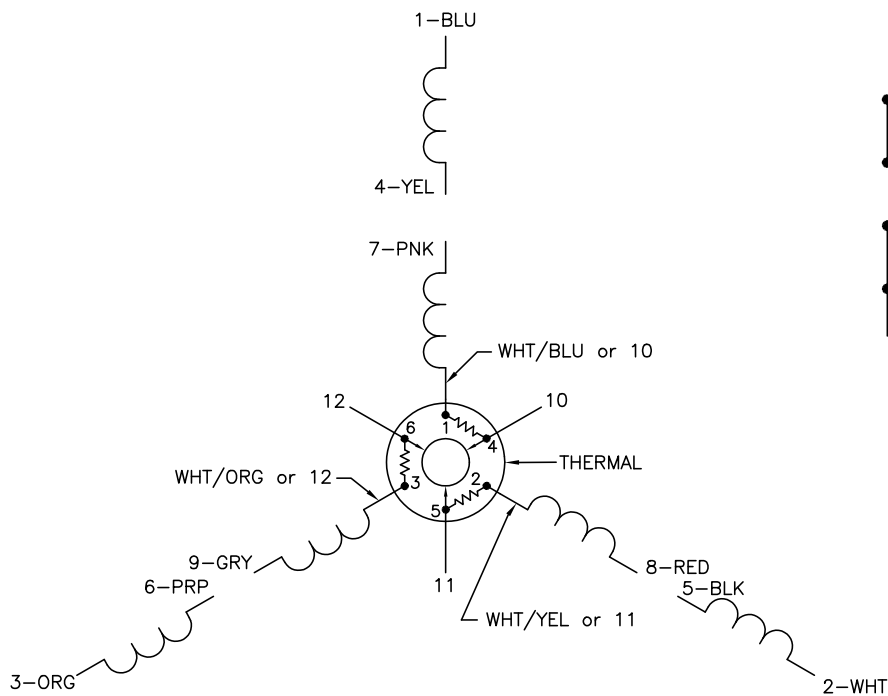

- NOTES:
1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0007

REV. DESC: ADDED "CK" PLANT CODE			
REV. LTR: E	BY: EAH	REVISED: 05/06/99 17:1	TDR: 0181040
200000		FILE: AAA00008370	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, THERMAL, 12 LEADS