

Motor data sheet




M2AA 71B 4

Definition	Data	Unit	Remarks
Product code	3GAA072002-**E		
Voltage code	S		
Type/Frame	M2AA 71B 4		
Design	CENELEC		
Efficiency class	IE2		
Rated output P_N	0.37	kW	
Rated voltage U_N	460	V	± 5 % (IEC 60034-1)
Rated frequency f_N	60	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	1695	r/min	
Rated current I_N	0.86	A	
Starting current I_S/I_N	5.3		
Nominal torque T_N	2	Nm	
Locked rotor torque T_l/T_N	2.2		
Maximum torque T_b/T_N	2.6		
Efficiency - full load 100%	74.4	%	Acc. to IEC 60034-2-1
Efficiency - 75%	74.9	%	
Efficiency - 50%	71.9	%	
Power factor - full load 100%	0.72		
Bearing DE/NDE	6203-2Z/C3 6202-2Z/C3		
Sound pressure level L_{pA} dB	48	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm ²	0	kg-m ²	
Weight	5.9	kg	


Motor data sheet


M2AA 71B 4

Definition	Data	Unit	Remarks
Product code	3GAA072002-**E		
Voltage code	S		
Type/Frame	M2AA 71B 4		
Design	CENELEC		
Efficiency class	IE1		
Rated output P_N	0.37	kW	
Rated voltage U_N	400	V	± 5 % (IEC 60034-1)
Rated frequency f_N	50	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	1375	r/min	
Rated current I_N	0.96	A	
Starting current I_S/I_N	3.8		
Nominal torque T_N	2.5	Nm	
Locked rotor torque T_l/T_N	2		
Maximum torque T_b/T_N	2.2		
Efficiency - full load 100%	69.7	%	Acc. to IEC 60034-2-1
Efficiency - 75%	71.9	%	
Efficiency - 50%	71.1	%	
Power factor - full load 100%	0.79		
Bearing DE/NDE	6203-2Z/C3 6202-2Z/C3		
Sound pressure level L_{pA} dB	45	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm ²	0	kg-m ²	
Weight	5.9	kg	

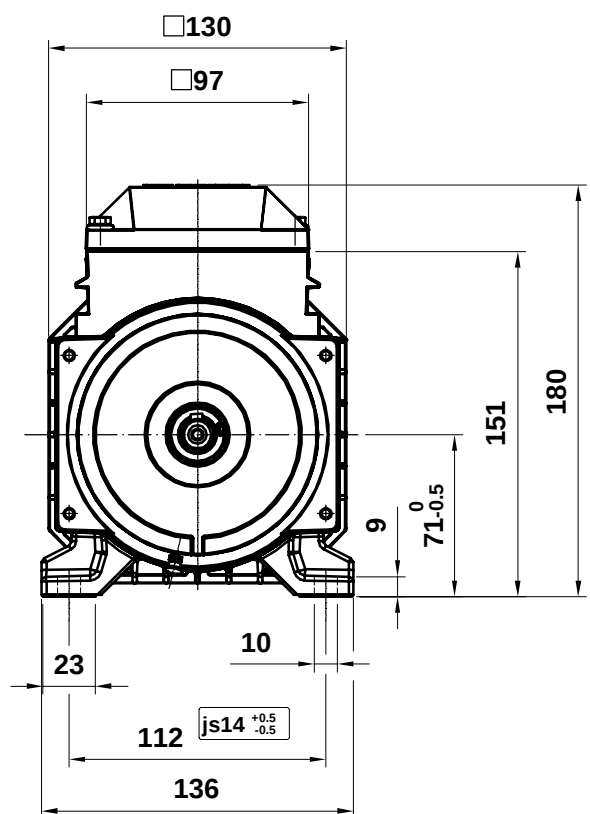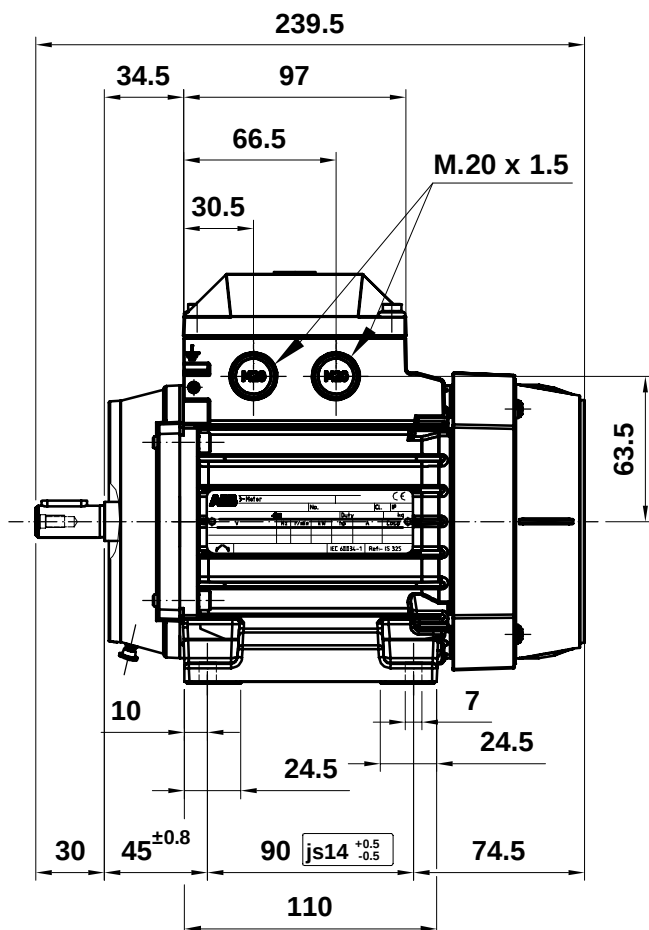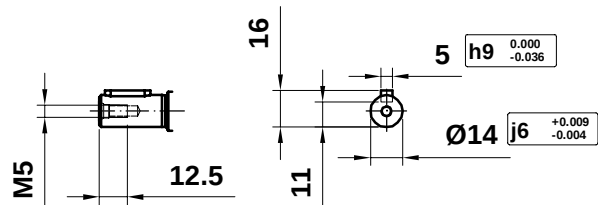


M2AA 071

Motor Dimension Print	Motor Type : M2AA 071	Document N° : A1.5400 / 3D A2.5010
Description : Motor foot mounted IM1001 / Motor con patas IM1001		
Unit : Discrete Automation and Motion - Fáb. Motores Date : 2012-02-08	Issued by : ERM / L. Moreno Approved by : ERM / G.Blanes	Replaces : Replaced by :
Asea Brown Boveri, S.A.	Customer Reference :	

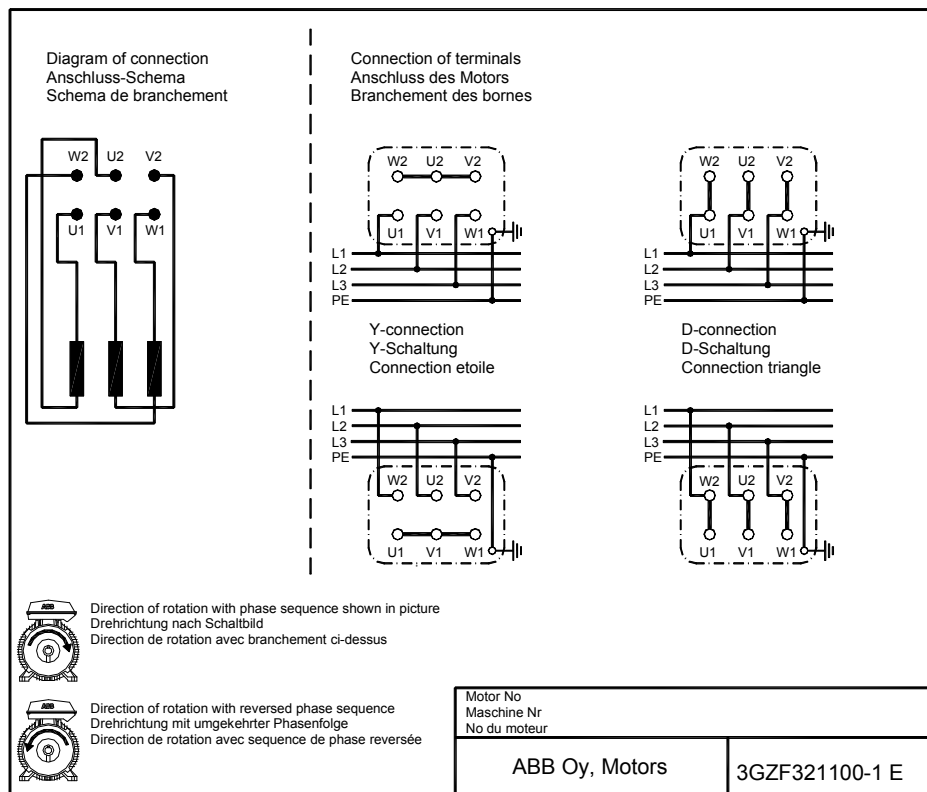

Connection Diagram			Document No: 3GZF321100-1 E
Description: 3-PHASE SQUIRREL-CAGE MOTOR			
Unit: Motors	Issued by: M Prusi	Replaces:	
Date: 21.09.2005	Approved by: Jari Raittila	Replaced by:	
ABB Oy	Customer Reference:		

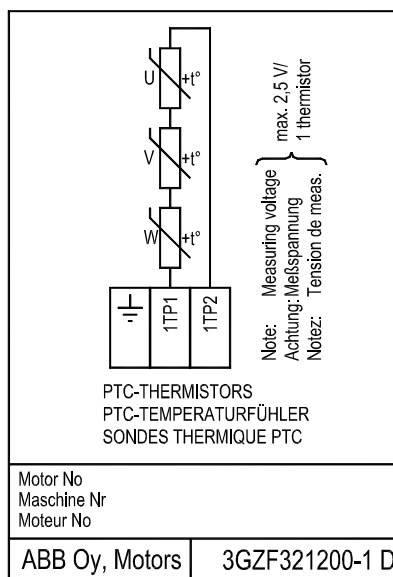

Accessory Connection Diagram			Document No: 3GZF321200-1 D
Description: PTC-THERMISTORS			
Unit: Motors	Issued by: K.Högvist	Replaces:	
Date: 30.11.2005	Approved by: M.Prusi	Replaced by:	
ABB Oy	Customer Reference:		ABB