

ABB BALDOR RELIANCE III

Customer information packet

RL1206A

.33HP, 1725RPM, 1PH, 60HZ, 56, 3414L, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Resilient
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.000 A @ 230.0 V 3.600 A @ 208.0 V 6.000 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	60.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Resilient Mount
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	L
Type	AC
Mech. spec.	34K018
Base	
Status	PRD/A
Elec. spec.	34WG5599
Layout	34LYK018
Eff. date	10-28-2024
CD Diagram	CD0052
Poles	04
Leads	7#18
Proprietary	False
Created date	03-19-2013

High Voltage Full Load Amps	3.0 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Terminal Panel
Motor Lead Quantity/Wire Size	7 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3414L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	10.96 IN
Power Factor	60
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Resilient Mount
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible: Connected Standard
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload



Winding Thermal 1 Location	SB
Winding Thermal 2	None

Nameplate

NP1257L											
CAT.NO.	RL1206A										
SPEC.	34K018-5599G1										
HP	.33										
VOLTS	115/230										
AMP	6/3										
RPM	1725										
FRAME	56			HZ		60		PH		1	
SER.F.	1.15		CODE	L	DES		N	CL	B		
NEMA-NOM-EFF	60		PF		60						
RATING	40C AMB-CONT										
CC											
DE	6203		ODE		6203						
ENCL	OPEN		SN								

AC Induction Motor Performance Data

Record # 50725

Typical performance - not guaranteed values

Winding: 34WG5599-R002				Type: 3414L		Enclosure: OPEN	
Nameplate Data				230 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.33		Full Load Torque		1 LB-FT	
Volts		115/230		Start Configuration		direct on line	
Full Load Amps		6/3		Breakdown Torque		2.95 LB-FT	
R.P.M.		1725		Pull-up Torque		2.55 LB-FT	
Hz	60	Phase	1	Locked-rotor Torque		3.6 LB-FT	
NEMA Design Code		N	KVA Code	Starting Current		13 A	
Service Factor (S.F.)		1.15		No-load Current		2.6 A	
NEMA Nom. Eff.		60	Power Factor	60	Line-line Res. @ 25°C		6.32 Ω A Ph 4.93 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		43°C	
S.F. Amps				Temp. Rise @ S.F. Load		47°C	

Load Characteristics 230 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	41	51	60	66	72	64
Efficiency	34	49	56	60	62	63	61.2
Speed	1783	1765	1745	1730	1710	1680	1718
Line amperes	2.6	2.7	2.8	3	3.3	3.7	3.18


ABB Motors and Mechanical Inc.


WINDING # 34WG5599

Typical performance - not guaranteed values.


0.33 HP 1 PH 60 HZ 1725 RPM 230 V 3414L

TORQUES (LB-FT): PO=2.95 PU=2.55 LR=3.6 LRA=13

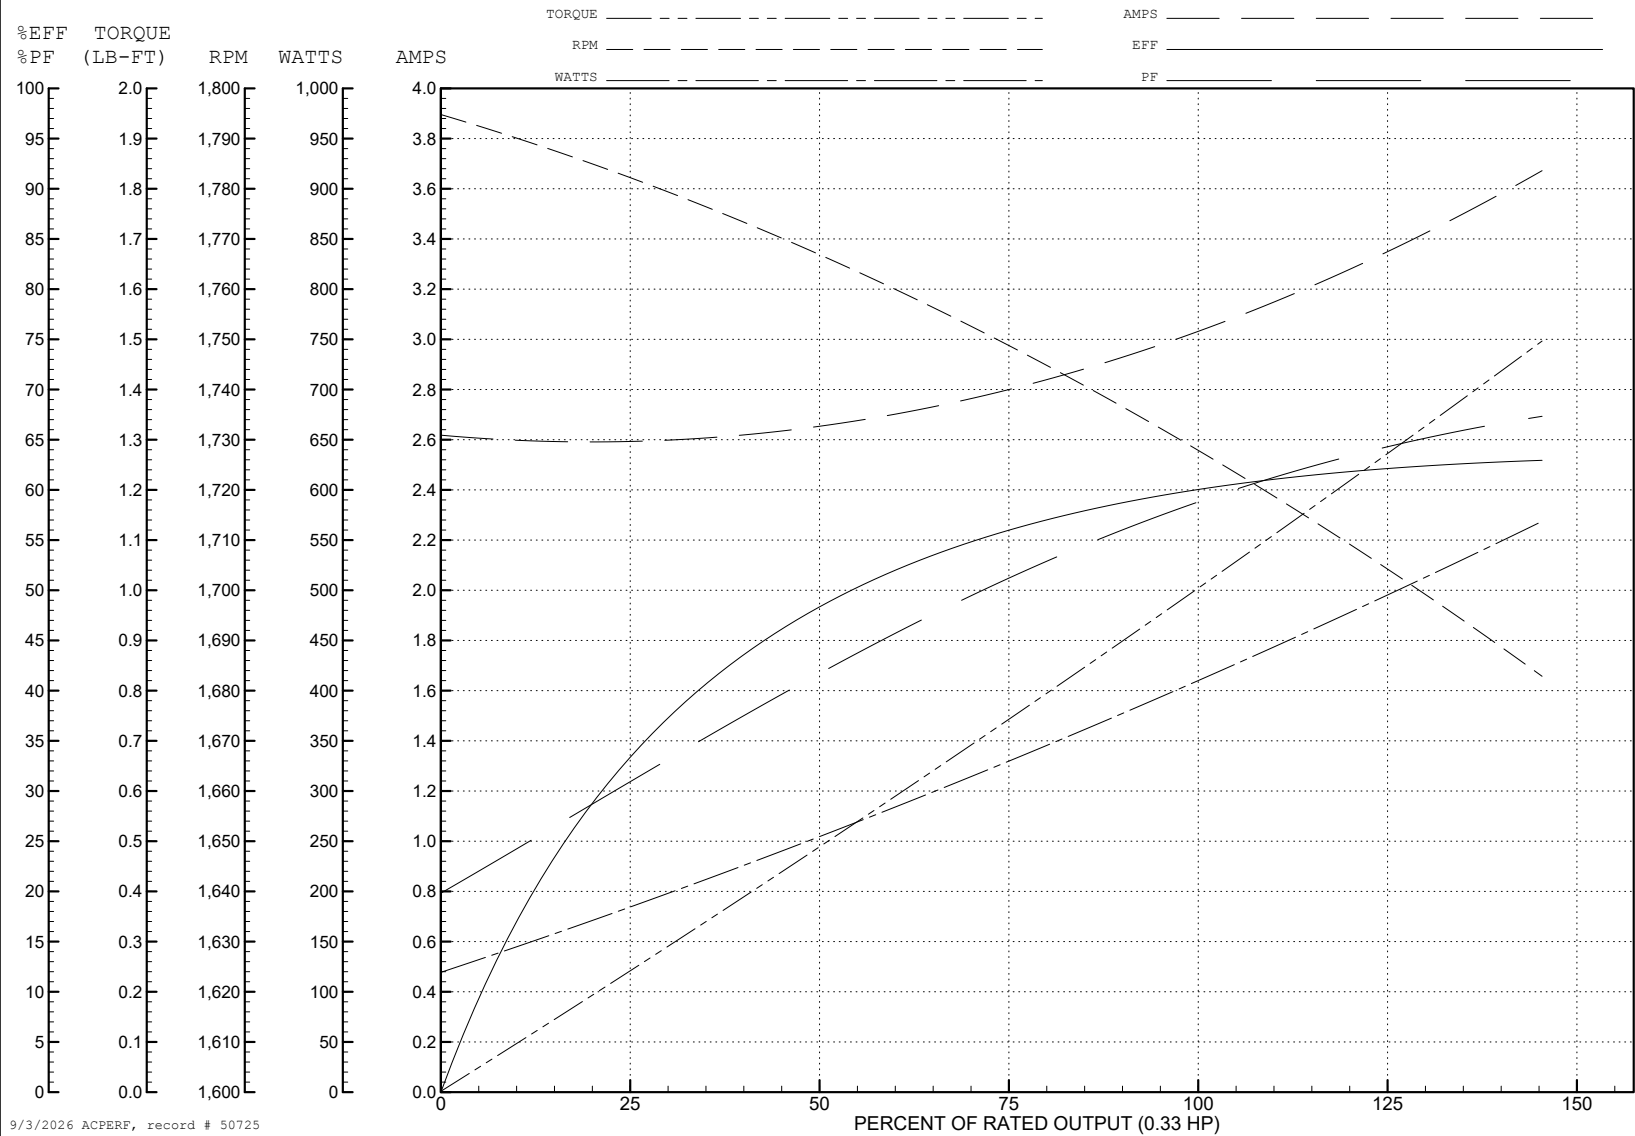

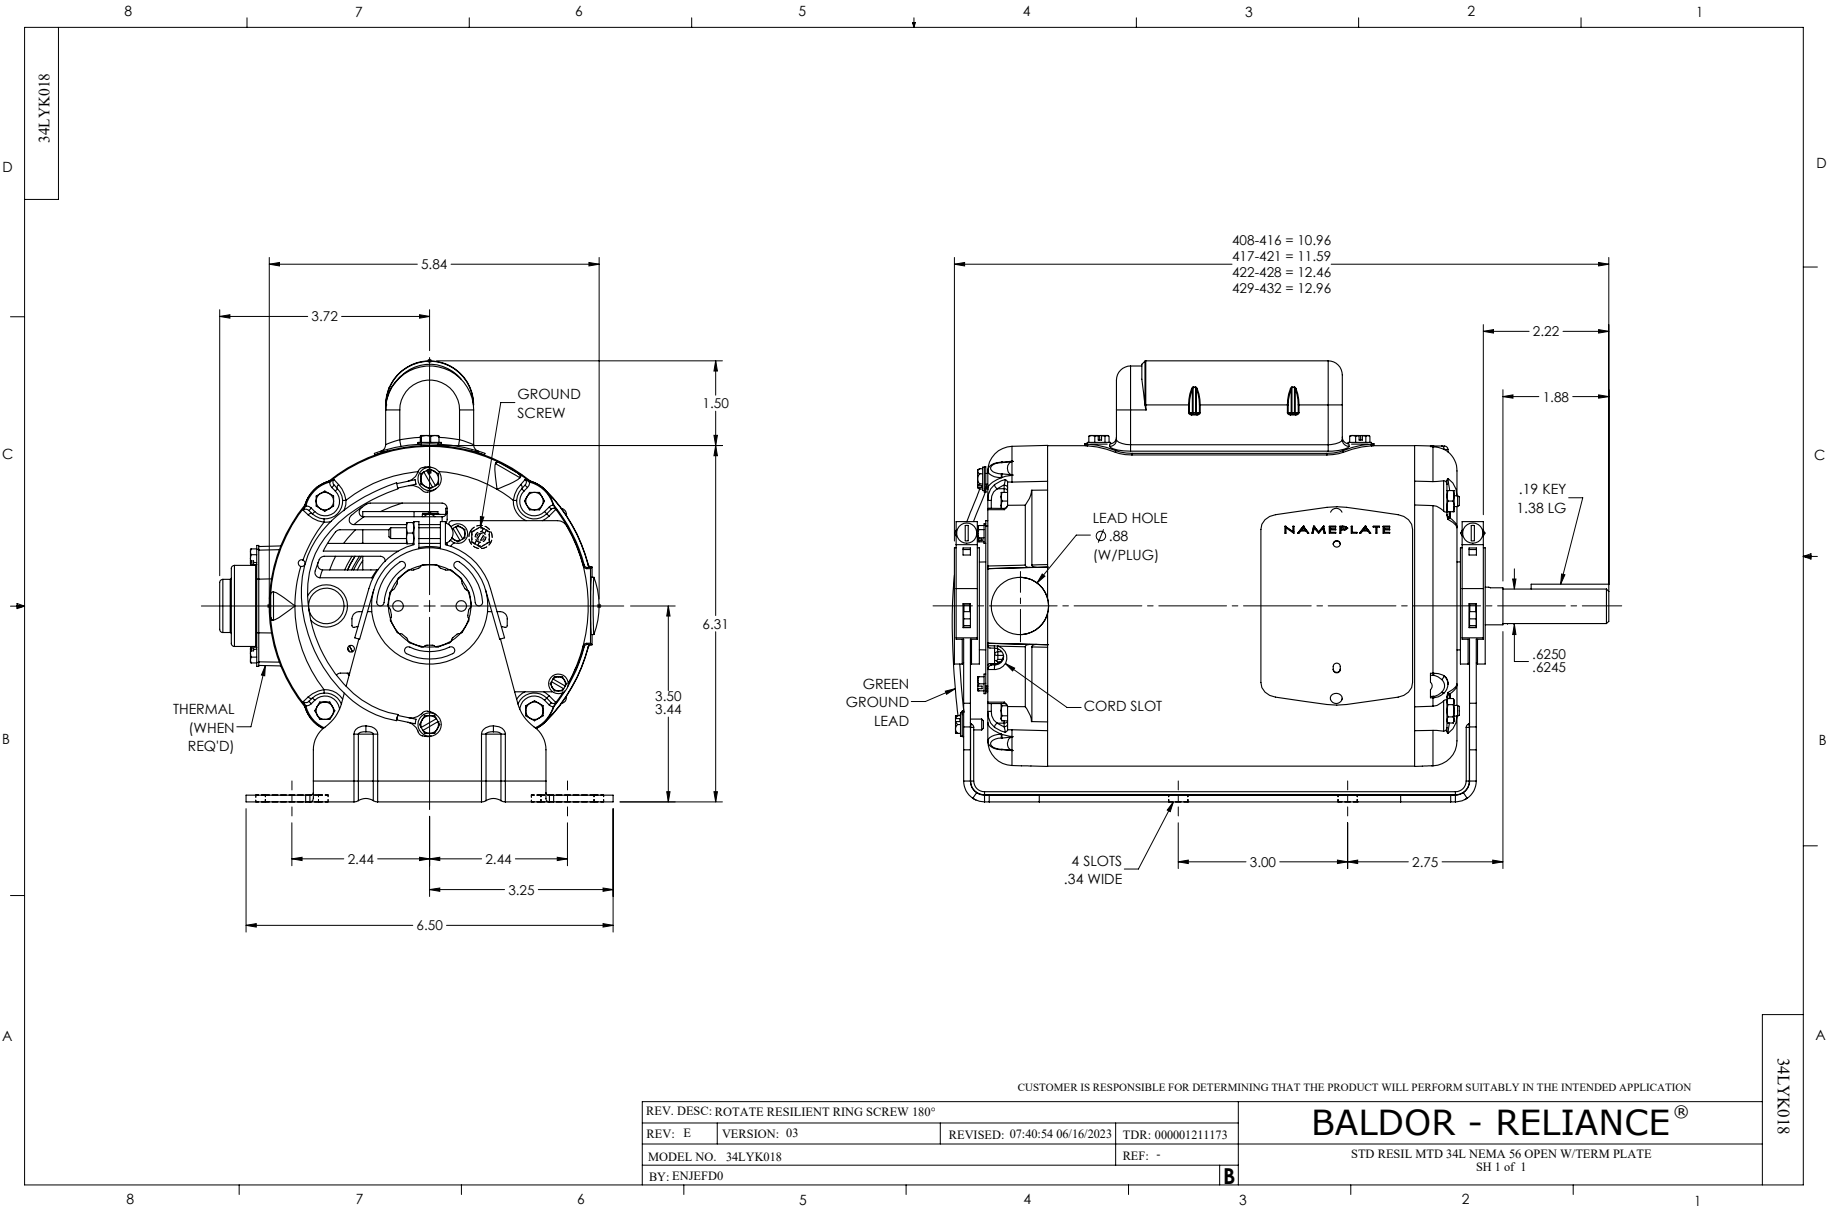

CD0052

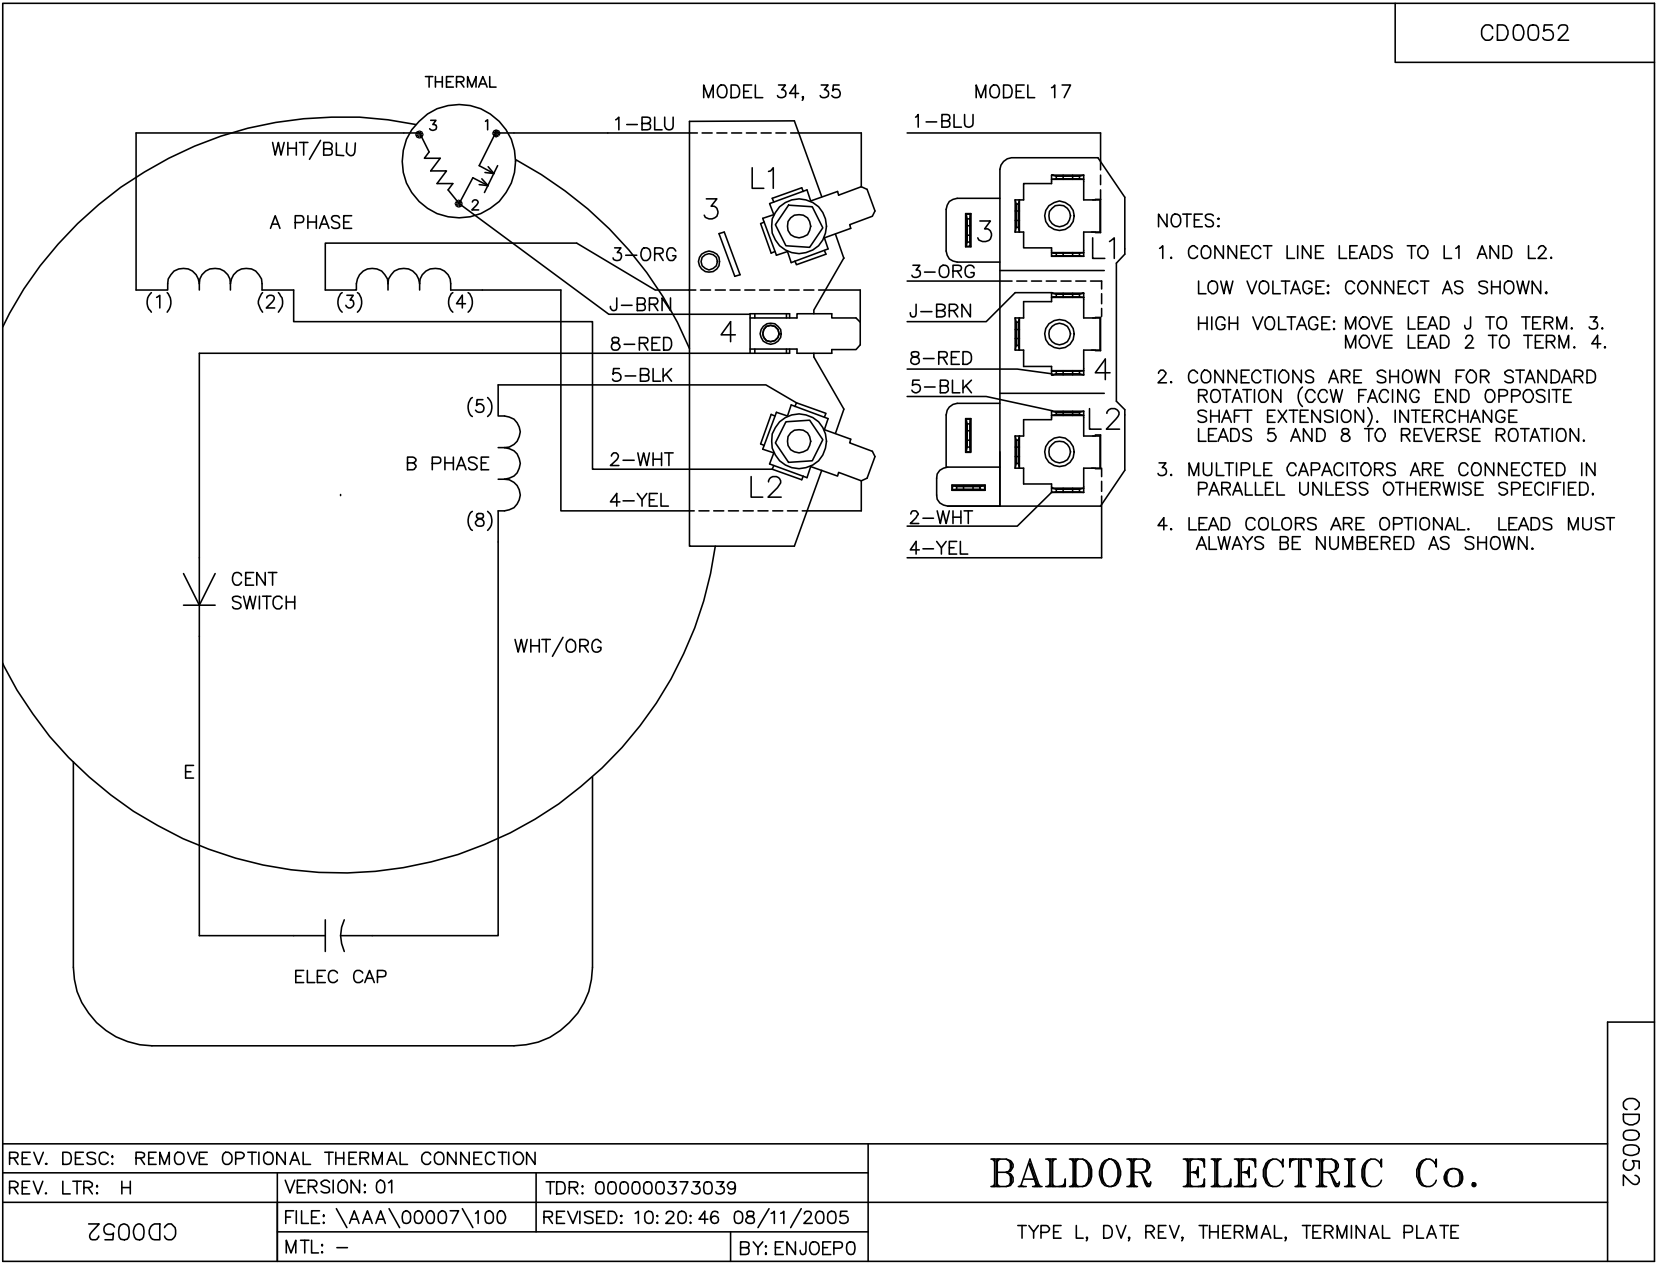

CD0052