ABB BALDOR RELIANCE

Customer information packet

VBNM3542-D

.75/.55 KWHP, 1765 1/MIN IP44 IC410 19 KG
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/18/2026 12:05:47 PM

Specifications

Enclosure	TENV
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	208.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA
	UR
	WEEE
	CE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.420 A @ 230.0 V
	2.420 A @ 208.0 V
	1.210 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part Detail

Revision	G
Type	AC
Mech. spec.	35X058
Base	
Status	PRD/A
Elec. spec.	35WGG069
Layout	35LYX058
Eff. date	01-12-2026
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	01-10-2022

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.2 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3514M
Mounting Arrangement	F3
Number of Poles	4
Overall Length	15.96 IN
Power Factor	74
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1765 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1372L											
CAT.NO.	VBNM3542-D										
SPEC.	35X058G069G1										
HP	.75/.55 KW										
VOLTS	208-230/460										
AMP	2.42/1.21										
R.P.M. (1/MIN)	1765										
FRAME	56C		**HZ**	60			**PH**	3			
SER.F.	1.15	**CODE**	K	**DES**	B	**CL**	F				
NEMA-NOM-EFF	82.5	**PF**	74								
RATING	40C AMB-S1 CONT										
CC			IP44 KG19 IC410								
DE	6205		**ODE**	6203							
ENCL	TENV	**SN**									
	IE2-83.3(75%)81(50%)										


AC Induction Motor Performance Data
Record # 87328
Typical performance - not guaranteed values


Winding: 35WGG069-R012	**Type:** 3514M	**Enclosure:** TENV

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			.75	**Full Load Torque**	2.24 LB-FT
Volts			208-230/460	**Start Configuration**	direct on line
Full Load Amps			2.42/1.21	**Breakdown Torque**	8 LB-FT
R.P.M.			1765	**Pull-up Torque**	4.4 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	5.1 LB-FT
NEMA Design Code	B	**KVA Code**	K	**Starting Current**	8.4 A
Service Factor (S.F.)			1.15	**No-load Current**	0.85 A
NEMA Nom. Eff.	82.5	**Power Factor**	74	**Line-line Res. @ 25ºC**	30.3 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	59°C
S.F. Amps			2.72-2.64/1.32	**Temp. Rise @ S.F. Load**	69°C
				Locked-rotor Power Factor	66.8
				Rotor inertia	0.101 LB-FT2


Load Characteristics 460 V, 60 Hz, 0.75 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	31	48	61	70	76	81	78
Efficiency	68.4	79.5	81.9	82.7	82.5	81.1	83.1
Speed	1791	1783	1775	1766	1757	1745	1757
Line amperes	0.87	0.95	1.06	1.21	1.4	1.61	1.26

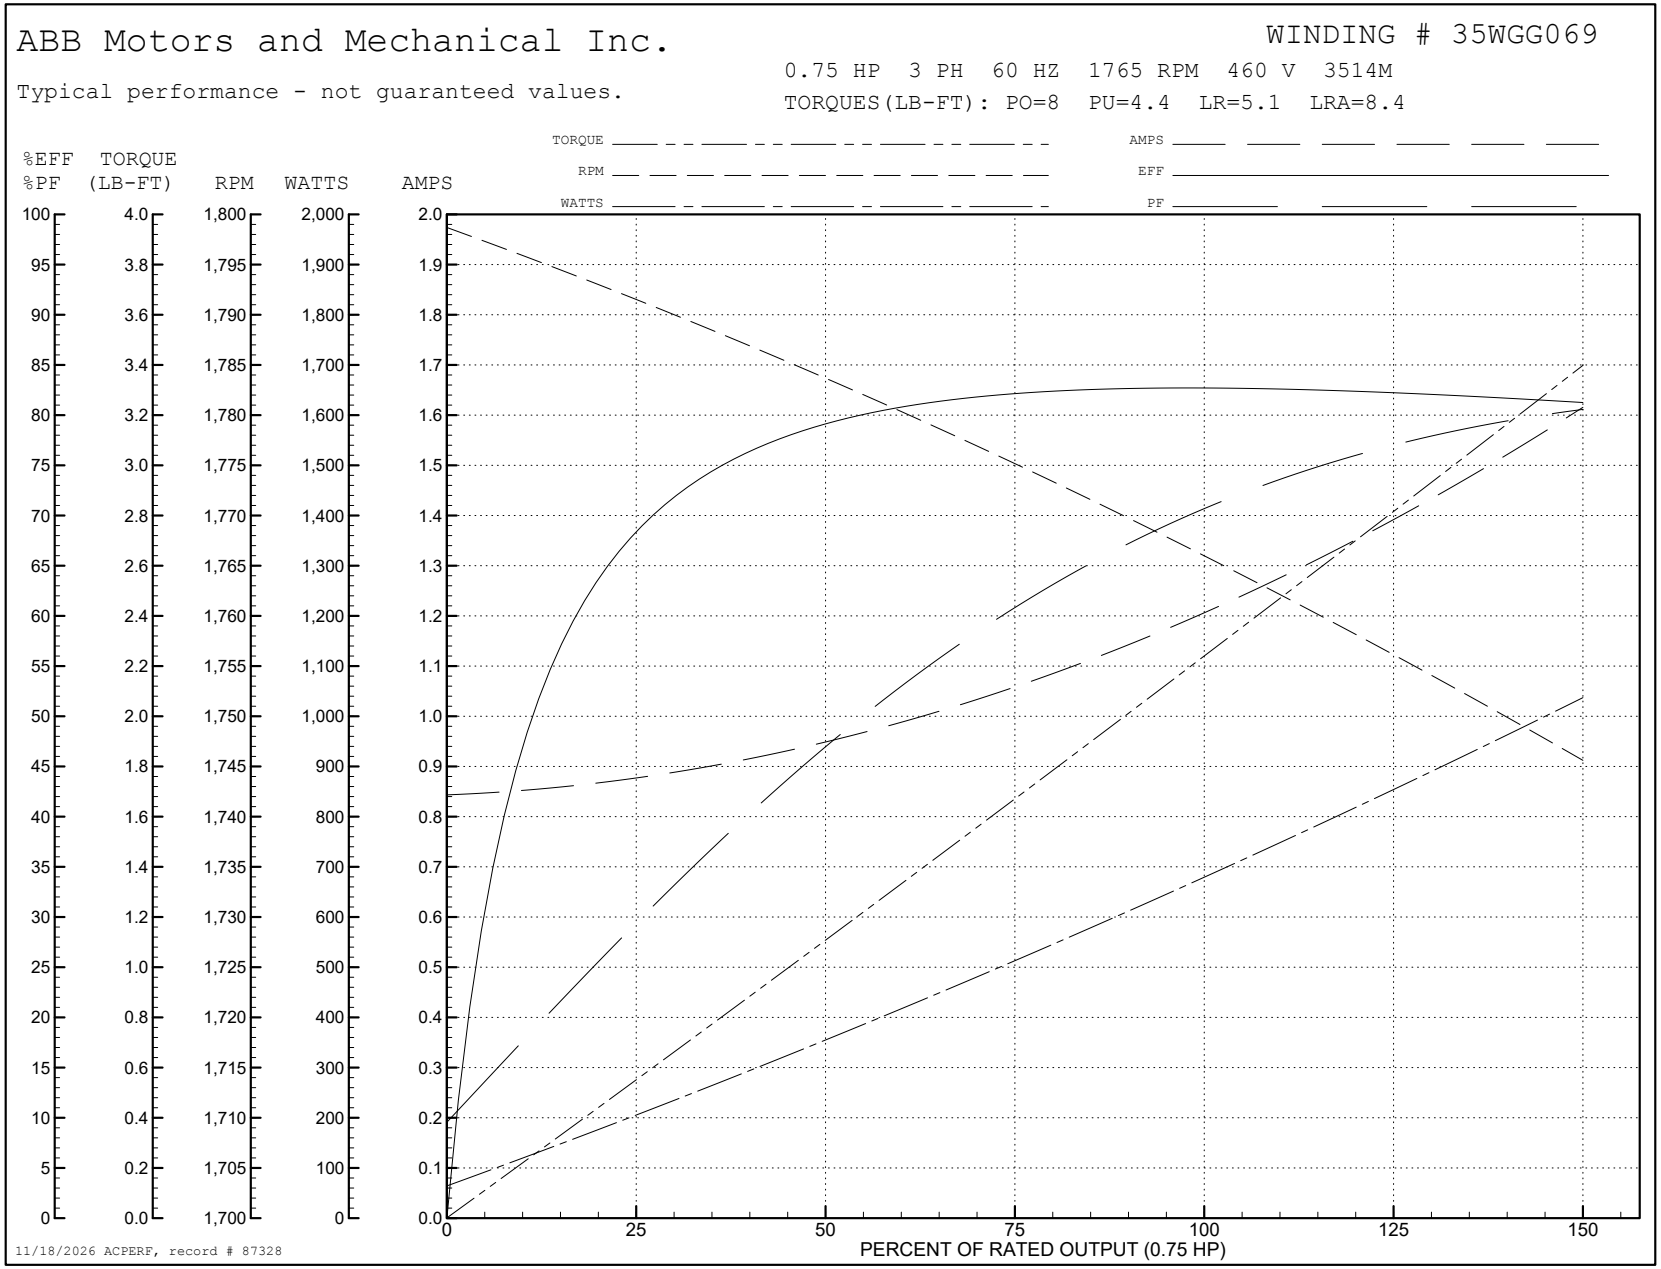
ABB Motors and Mechanical Inc.
WINDING # 35WGG069
Typical performance - not guaranteed values.
0.75 HP 3 PH 60 HZ 1765 RPM 460 V 3514M
TORQUES(LB-FT): PO=8 PU=4.4 LR=5.1 LRA=8.4
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (0.75 HP)
11/18/2026 ACPERF, record # 87328

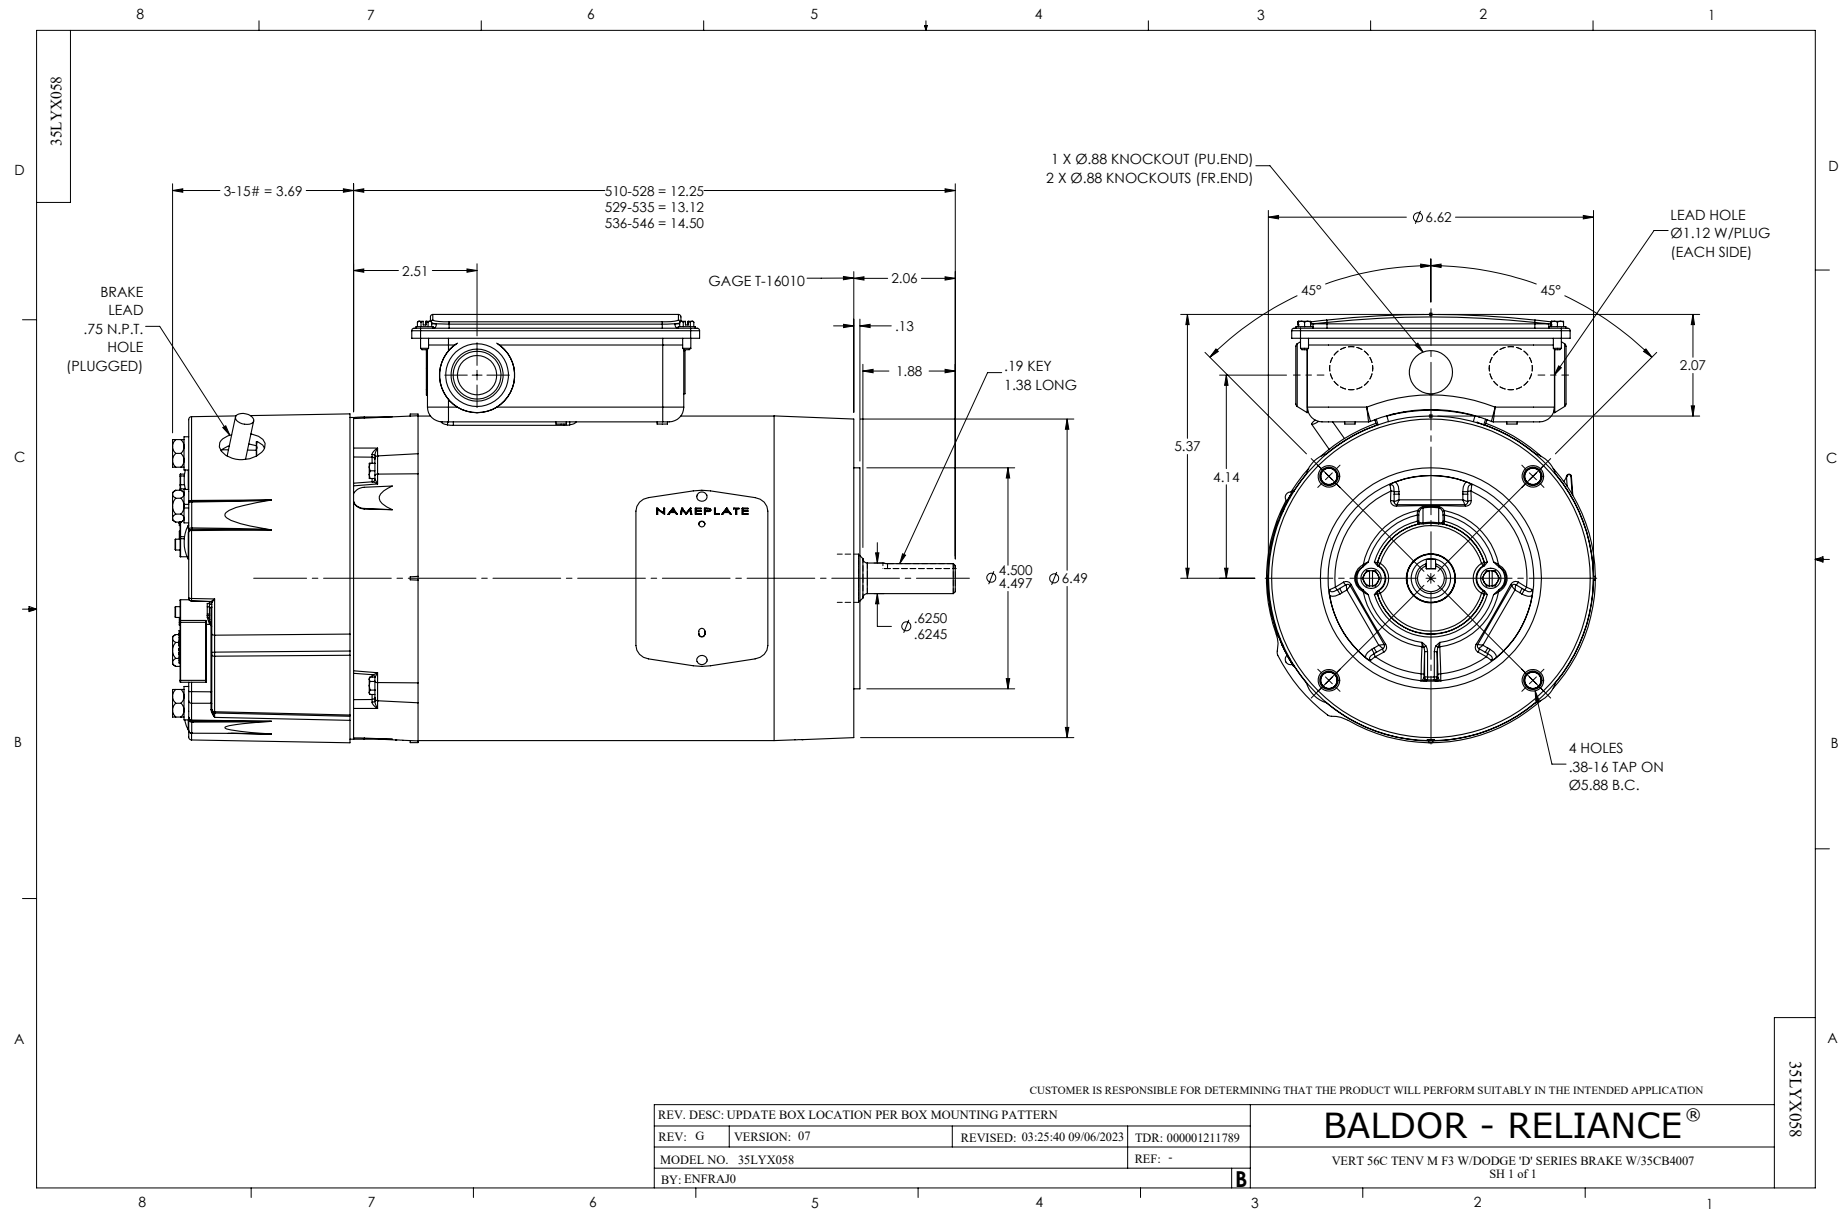
35LYX058
3-15# = 3.69
510-528 = 12.25
529-535 = 13.12
536-546 = 14.50
2.51
GAGE T-16010
2.06
.13
1.88
.19 KEY
1.38 LONG
BRAKE
LEAD
.75 N.P.T.
HOLE
(PLUGGED)
NAMEPLATE
Ø 4.500
4.497
Ø 6.49
Ø .6250
.6245
1 X Ø.88 KNOCKOUT (PU.END)
2 X Ø.88 KNOCKOUTS (FR.END)
Ø 6.62
LEAD HOLE
Ø1.12 W/PLUG
(EACH SIDE)
45°
45°
2.07
5.37
4.14
4 HOLES
.38-16 TAP ON
Ø5.88 B.C.
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: UPDATE BOX LOCATION PER BOX MOUNTING PATTERN
REV: G
VERSION: 07
REVISED: 03:25:40 09/06/2023
TDR: 000001211789
MODEL NO. 35LYX058
REF: -
BY: ENFRAJ0
B
BALDOR - RELIANCE®
VERT 56C TENV M F3 W/DODGE 'D' SERIES BRAKE W/35CB4007
SH 1 of 1
35LYX058

CD0005

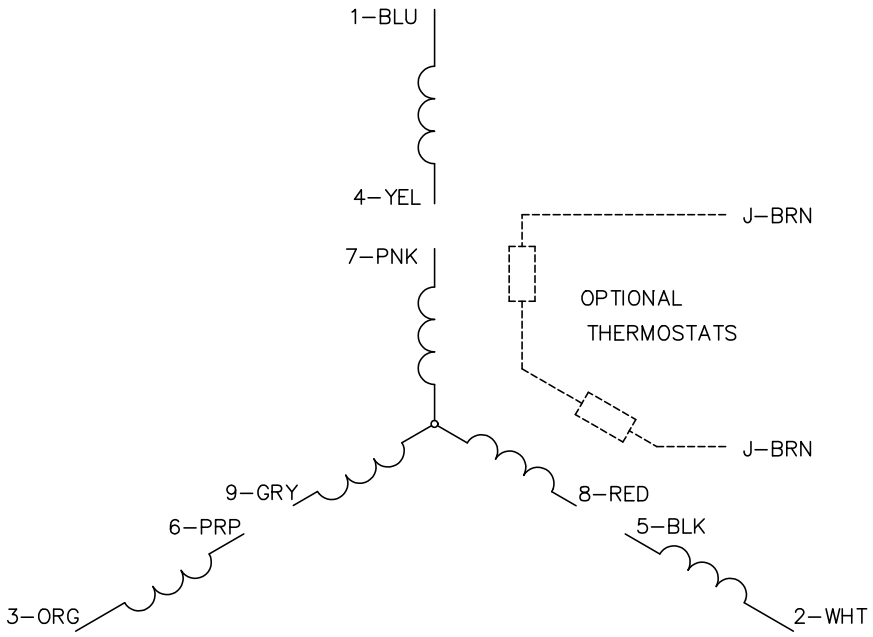

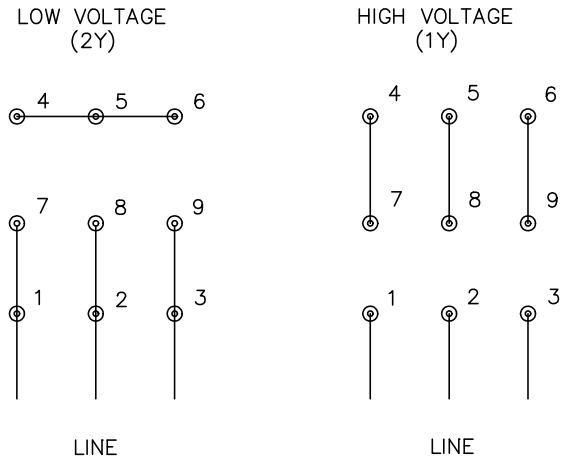

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS

CD2120

WIRING CONNECTIONS (1 PHASE VAC)

	POWER LINE A	POWER LINE B	CAP TOGETHER	CAP ALONE
AC LOW VOLT.	B1	B2	B3 & B5	B4
AC HIGH VOLT.	B1 & B5	B2	---	B3 CAP ALONE B4 CAP ALONE
DC VOLT.	B1	B2	B3 & B5	B4

B1 WHITE
B2 BLACK
B3 GRAY
B4 BLUE
B5 RED

CD2120

REV. DESC: NEW			BALDOR • DODGE • RELIANCE
REV. LTR: –	VERSION: 00	TDR: 000000741785	
FILE: \CKA\00037\282		REVISED: 12:28:11 04/12/2012	D–SERIES MOTOR BRAKE 5LD AC\DC
MTL: –		BY: CKRONS0	SH 1 of 1