

ABB BALDOR RELIANCE III

Customer information packet

VEBM3542-D

.75HP, 1765RPM, 3PH, 60HZ, 56C, 3514M, TEFC, F3

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.420 A @ 230.0 V 2.420 A @ 208.0 V 1.210 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	G
Type	AC
Mech. spec.	35X145
Base	
Status	PRD/A
Elec. spec.	35WGG069
Layout	35LYX145
Eff. date	01-12-2026
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	01-10-2022

High Voltage Full Load Amps	1.2 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3514M
Mounting Arrangement	F3
Number of Poles	4
Overall Length	16.29 IN
Power Factor	74
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1765 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2934L									
CAT.NO.	VEBM3542-D								
SPEC.	35X145G069G1								
HP	.75/.56KW								
VOLTS	208-230/460								
AMP	2.42/1.21								
R.P.M. (1/MIN)	1765								
FRAME	56C		HZ	60		PH	3		
SER.F.	1.15		CODE	K		DES	B	CL	F
NEMA-NOM-EFF	82.5		PF	74					
RATING	40C AMB-CONT								
CC			IP54,IC411,19KG						
DE	6205		ODE	6205					
ENCL	TEFC		SN						
	IE3-83.3(75%),81.0(50%)								

AC Induction Motor Performance Data

Record # 87328

Typical performance - not guaranteed values

Winding: 35WGG069-R012			Type: 3514M		Enclosure: TENV		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		.75	Full Load Torque		2.24 LB-FT		
Volts		208-230/460	Start Configuration		direct on line		
Full Load Amps		2.42/1.21	Breakdown Torque		8 LB-FT		
R.P.M.		1765	Pull-up Torque		4.4 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		5.1 LB-FT	
NEMA Design Code		B	KVA Code		K		
Service Factor (S.F.)		1.15	Starting Current		8.4 A		
NEMA Nom. Eff.		82.5	Power Factor		74		
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		59°C
S.F. Amps		2.72-2.64/1.32			Temp. Rise @ S.F. Load		69°C
					Locked-rotor Power Factor		66.8
					Rotor inertia		0.101 LB-FT2

Load Characteristics 460 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	48	61	70	76	81	78
Efficiency	68.4	79.5	81.9	82.7	82.5	81.1	83.1
Speed	1791	1783	1775	1766	1757	1745	1757
Line amperes	0.87	0.95	1.06	1.21	1.4	1.61	1.26


ABB Motors and Mechanical Inc.

WINDING # 35WGG069


Typical performance - not guaranteed values.

0.75 HP 3 PH 60 HZ 1765 RPM 460 V 3514M


TORQUES (LB-FT) : PO=8 PU=4.4 LR=5.1 LRA=8.4

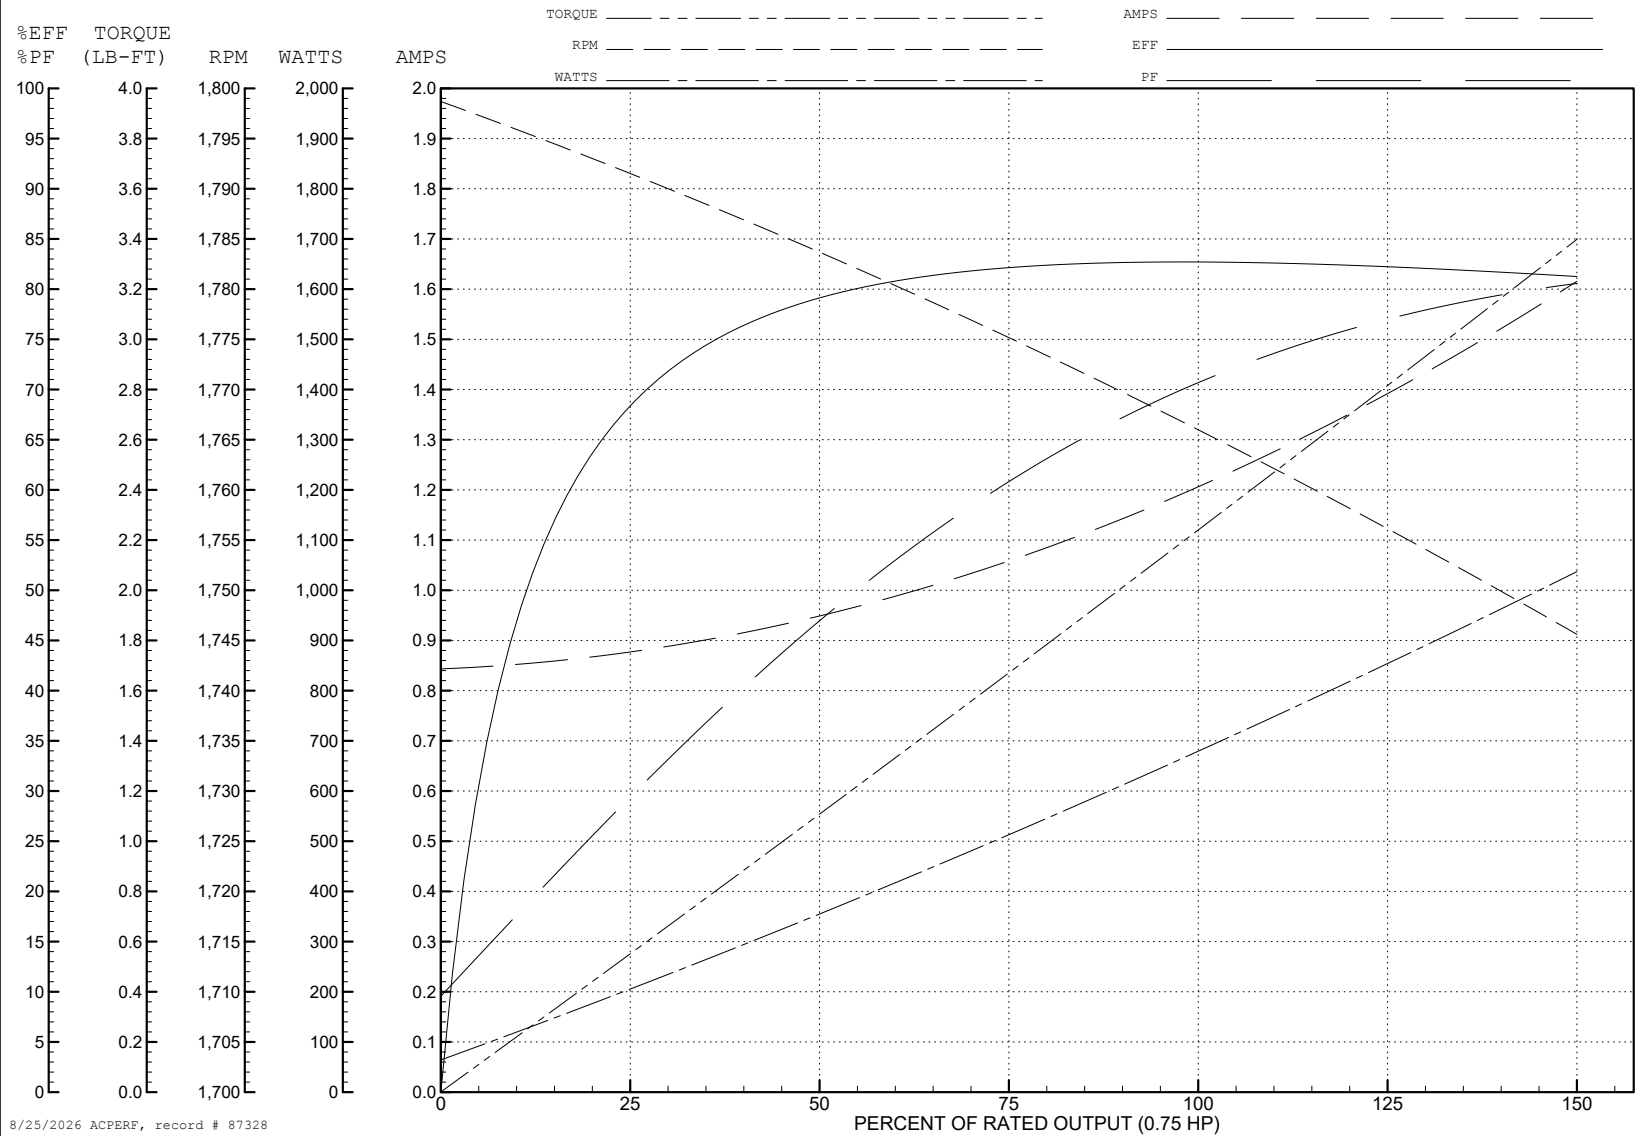


8/25/2026 ACPERF, record # 87328

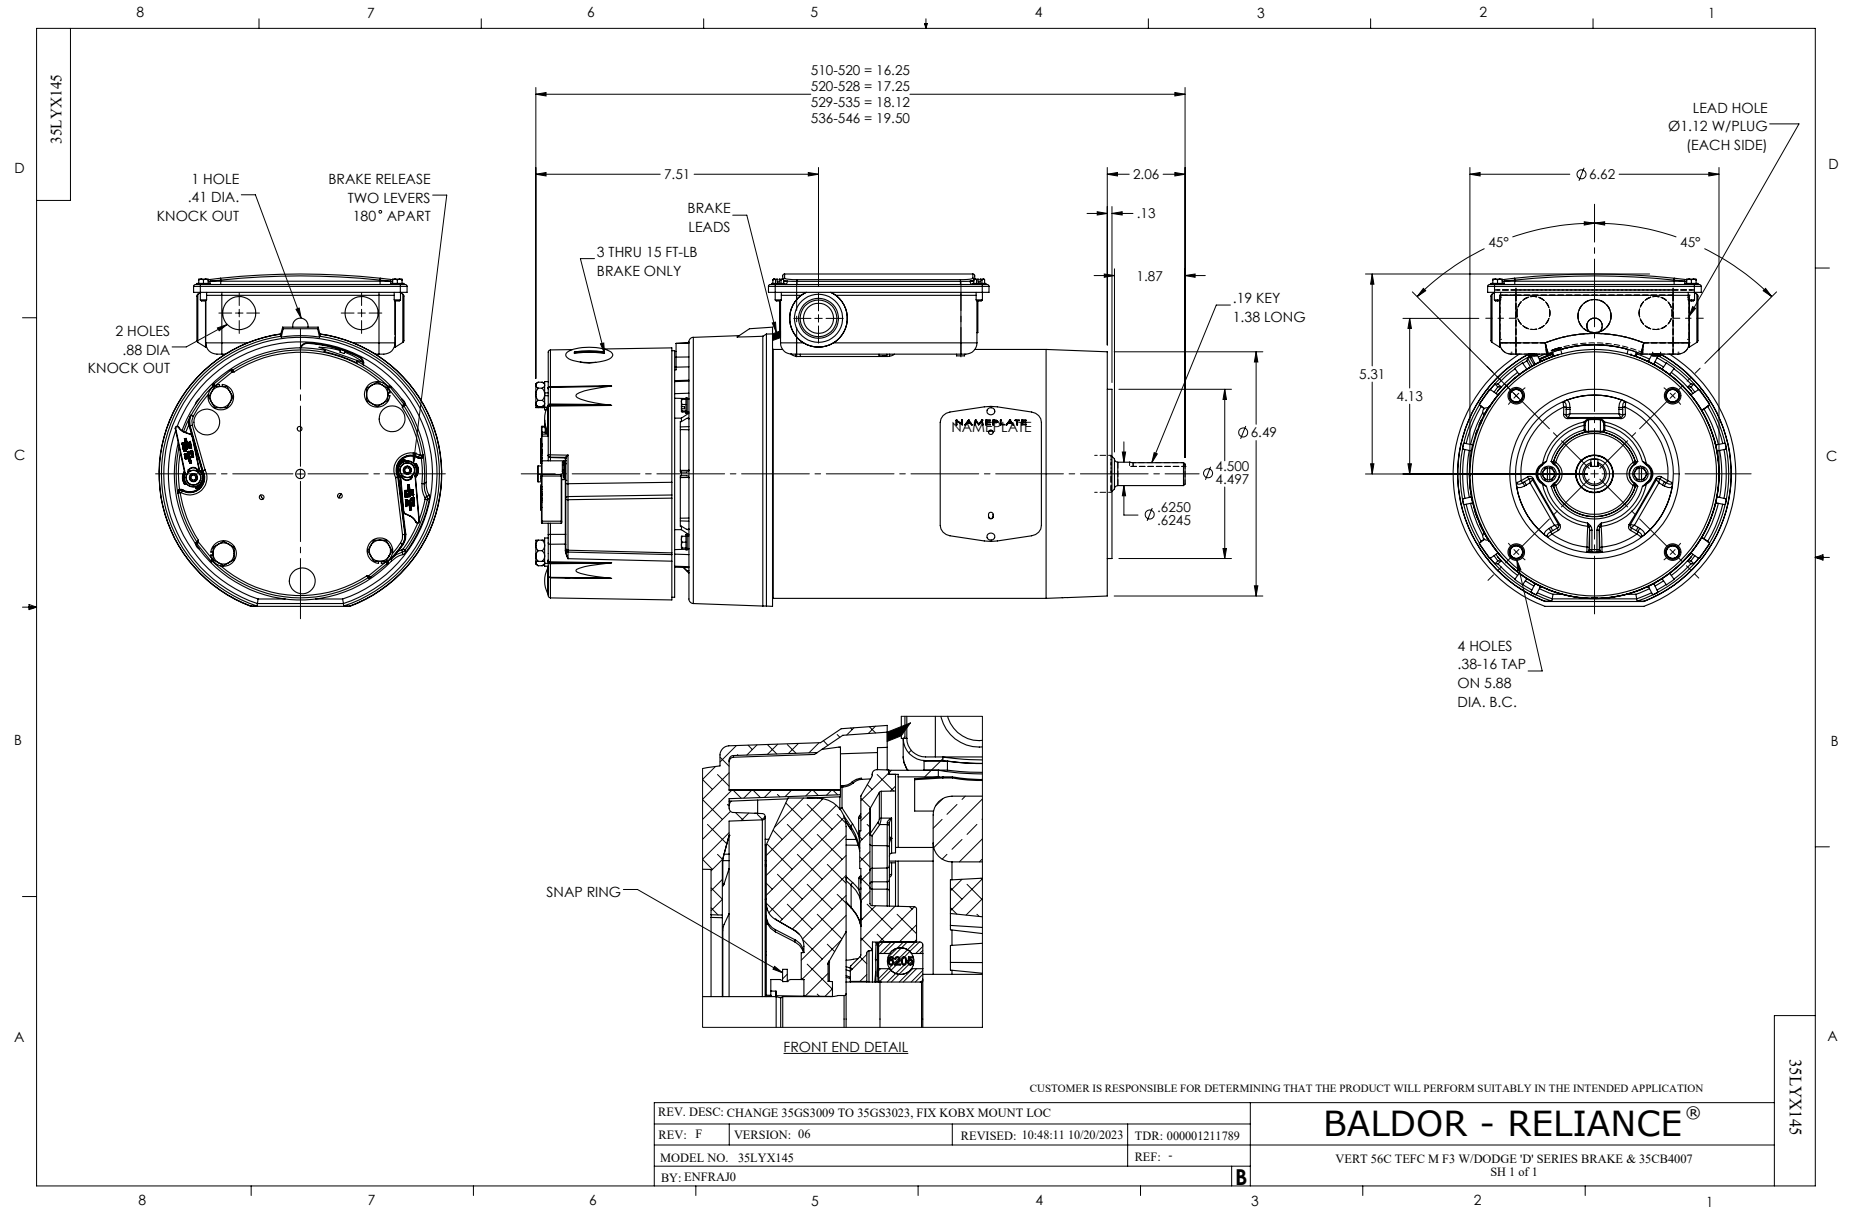

CD0005

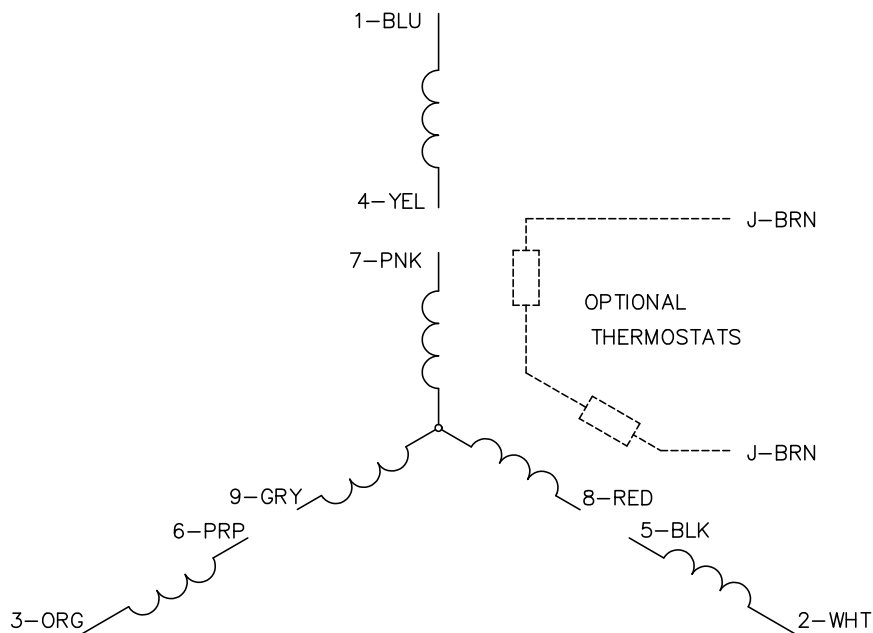


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E BY: JLP REVISED: 01/19/99 10:15 TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005

CD2120

WIRING CONNECTIONS (1 PHASE VAC)

	POWER LINE A	POWER LINE B	CAP TOGETHER	CAP ALONE
AC LOW VOLT.	B1	B2	B3 & B5	B4
AC HIGH VOLT.	B1 & B5	B2	---	B3 CAP ALONE B4 CAP ALONE
DC VOLT.	B1	B2	B3 & B5	B4

B1 WHITE
 B2 BLACK
 B3 GRAY
 B4 BLUE
 B5 RED

CD2120

REV. DESC: NEW			BALDOR • DODGE • RELIANCE III	
REV. LTR: -	VERSION: 00	TDR: 000000741785		
FILE: \CKA\00037\282		REVISED: 12:28:11 04/12/2012	D-SERIES MOTOR BRAKE 5LD AC\DC	
MTL: -		BY: CKRONSO	SH 1 of 1	