

ABB BALDOR RELIANCE III

Customer information packet

VEBM3558T-5D

2/1.5KWHP, 1764 1/MIN IP44 IC411 26KGRPM

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	145TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CE WEEE UKCA NEMA PREMIUM CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.150 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.2 a

Part Detail

Revision	G
Type	AC
Mech. spec.	35X050
Base	
Status	PRD/A
Elec. spec.	35WGG113
Layout	35LYX050
Eff. date	11-06-2024
CD Diagram	CD0006
Poles	04
Leads	3#18 Y
Proprietary	False
Created date	01-10-2022

Insulation Class	F
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3528M
Mounting Arrangement	F3
Number of Poles	4
Overall Length	17.19 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1764 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2934L									
CAT.NO.	VEBM3558T-5D								
SPEC.	35X050G113G1								
HP	2/1.5KW								
VOLTS	575								
AMP	2.15								
R.P.M. (1/MIN)	1765								
FRAME	145TC		HZ	60		PH	3		
SER.F.	1.15	CODE	L	DES	B	CL	F		
NEMA-NOM-EFF	86.5	PF	80						
RATING	40C AMB-S1 CONT								
CC	010A								
DE	6205	ODE	6205						
ENCL	TEFC	SN							
	IE3-86.9(75%)84.4(50%)								

AC Induction Motor Performance Data

Record # 81982

Typical performance - not guaranteed values

Winding: 35WGG113-R001			Type: 3528M		Enclosure: TEFC		
Nameplate Data			575 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		2	Full Load Torque		5.95 LB-FT		
Volts		575	Start Configuration		direct on line		
Full Load Amps		2.15	Breakdown Torque		23.7 LB-FT		
R.P.M.		1765	Pull-up Torque		14.43 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		17.45 LB-FT	
NEMA Design Code		B	KVA Code		L		
Service Factor (S.F.)		1.15	No-load Current		1.39 A		
NEMA Nom. Eff.		86.5	Power Factor		80		
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		58°C
S.F. Amps		2.56			Temp. Rise @ S.F. Load		70°C
					Locked-rotor Power Factor		57
					Rotor inertia		0.188 lb-ft²

Load Characteristics 575 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	34	54	68	76	81	84	79
Efficiency	77	84.7	86.6	86.3	85.3	83.7	85.7
Speed	1791	1783	1775	1766	1757	1745	1761
Line amperes	1.45	1.64	1.93	2.29	2.74	3.19	2.56


ABB Motors and Mechanical Inc.


WINDING # 35WGG113

Typical performance - not guaranteed values.




2 HP 3 PH 60 HZ 1765 RPM 575 V 3528M

TORQUES (LB-FT): PO=23.7 PU=14.43 LR=17.45 LRA=19.89

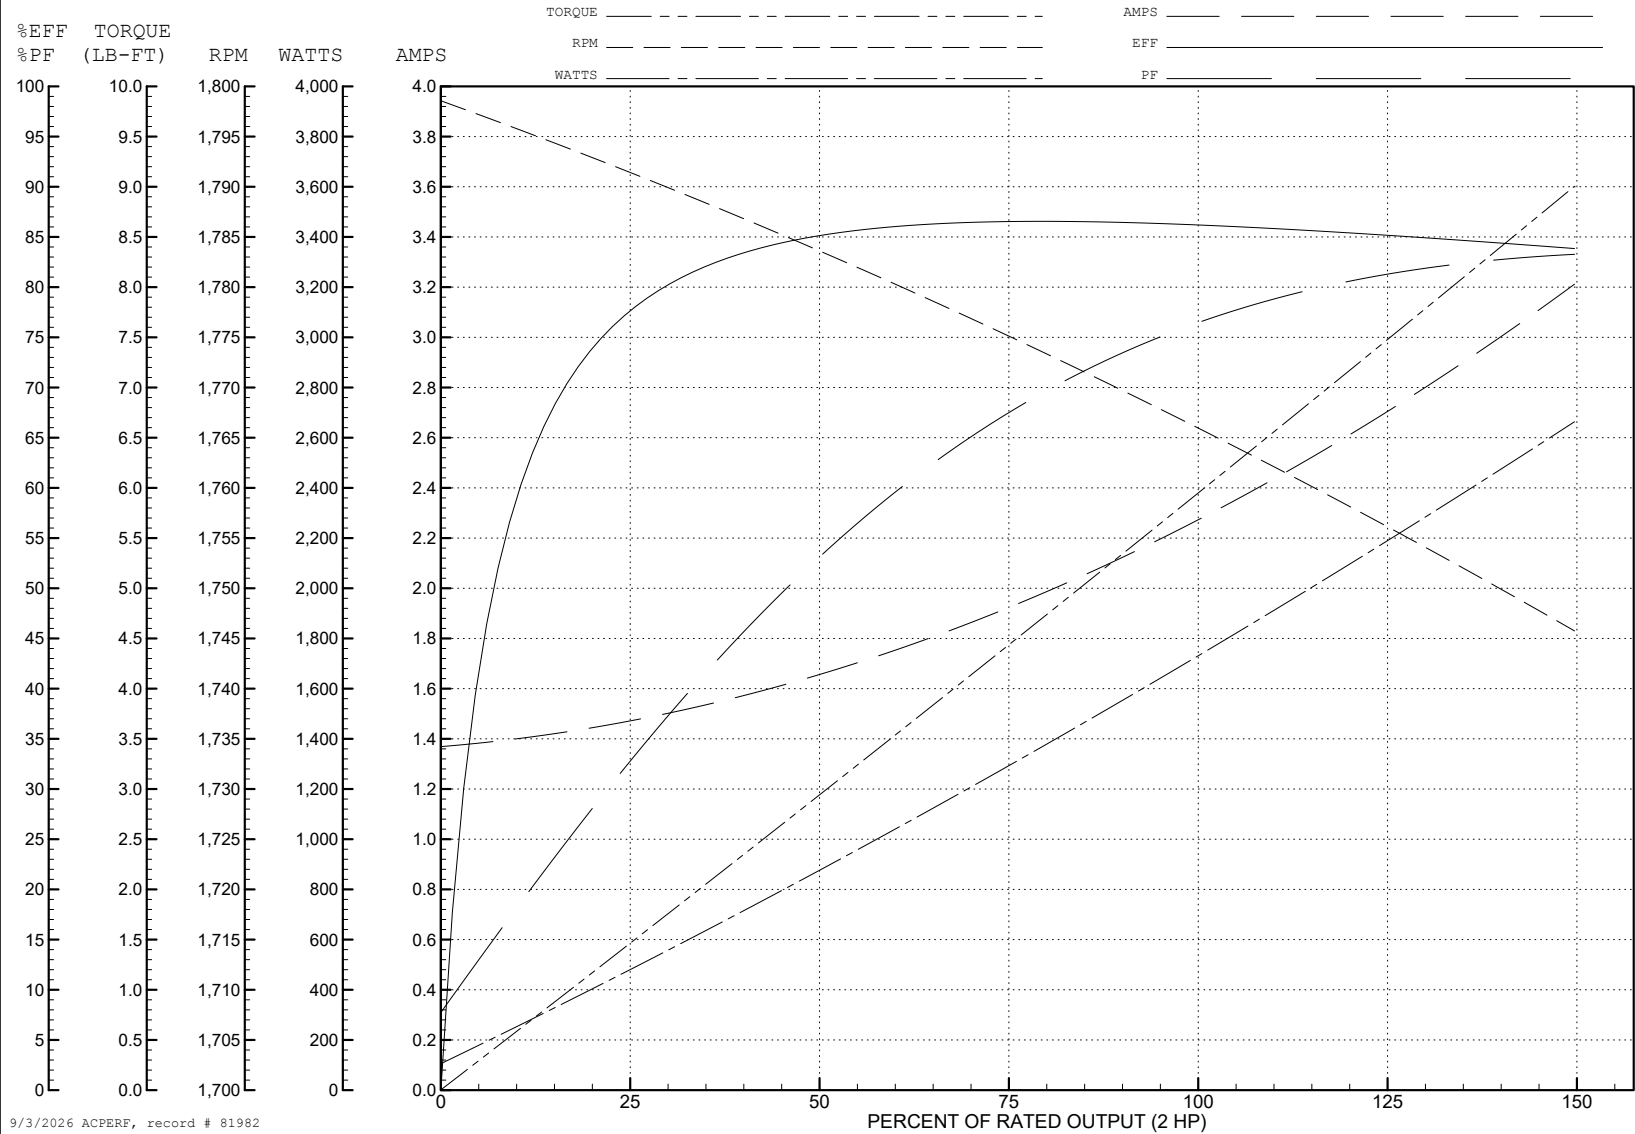

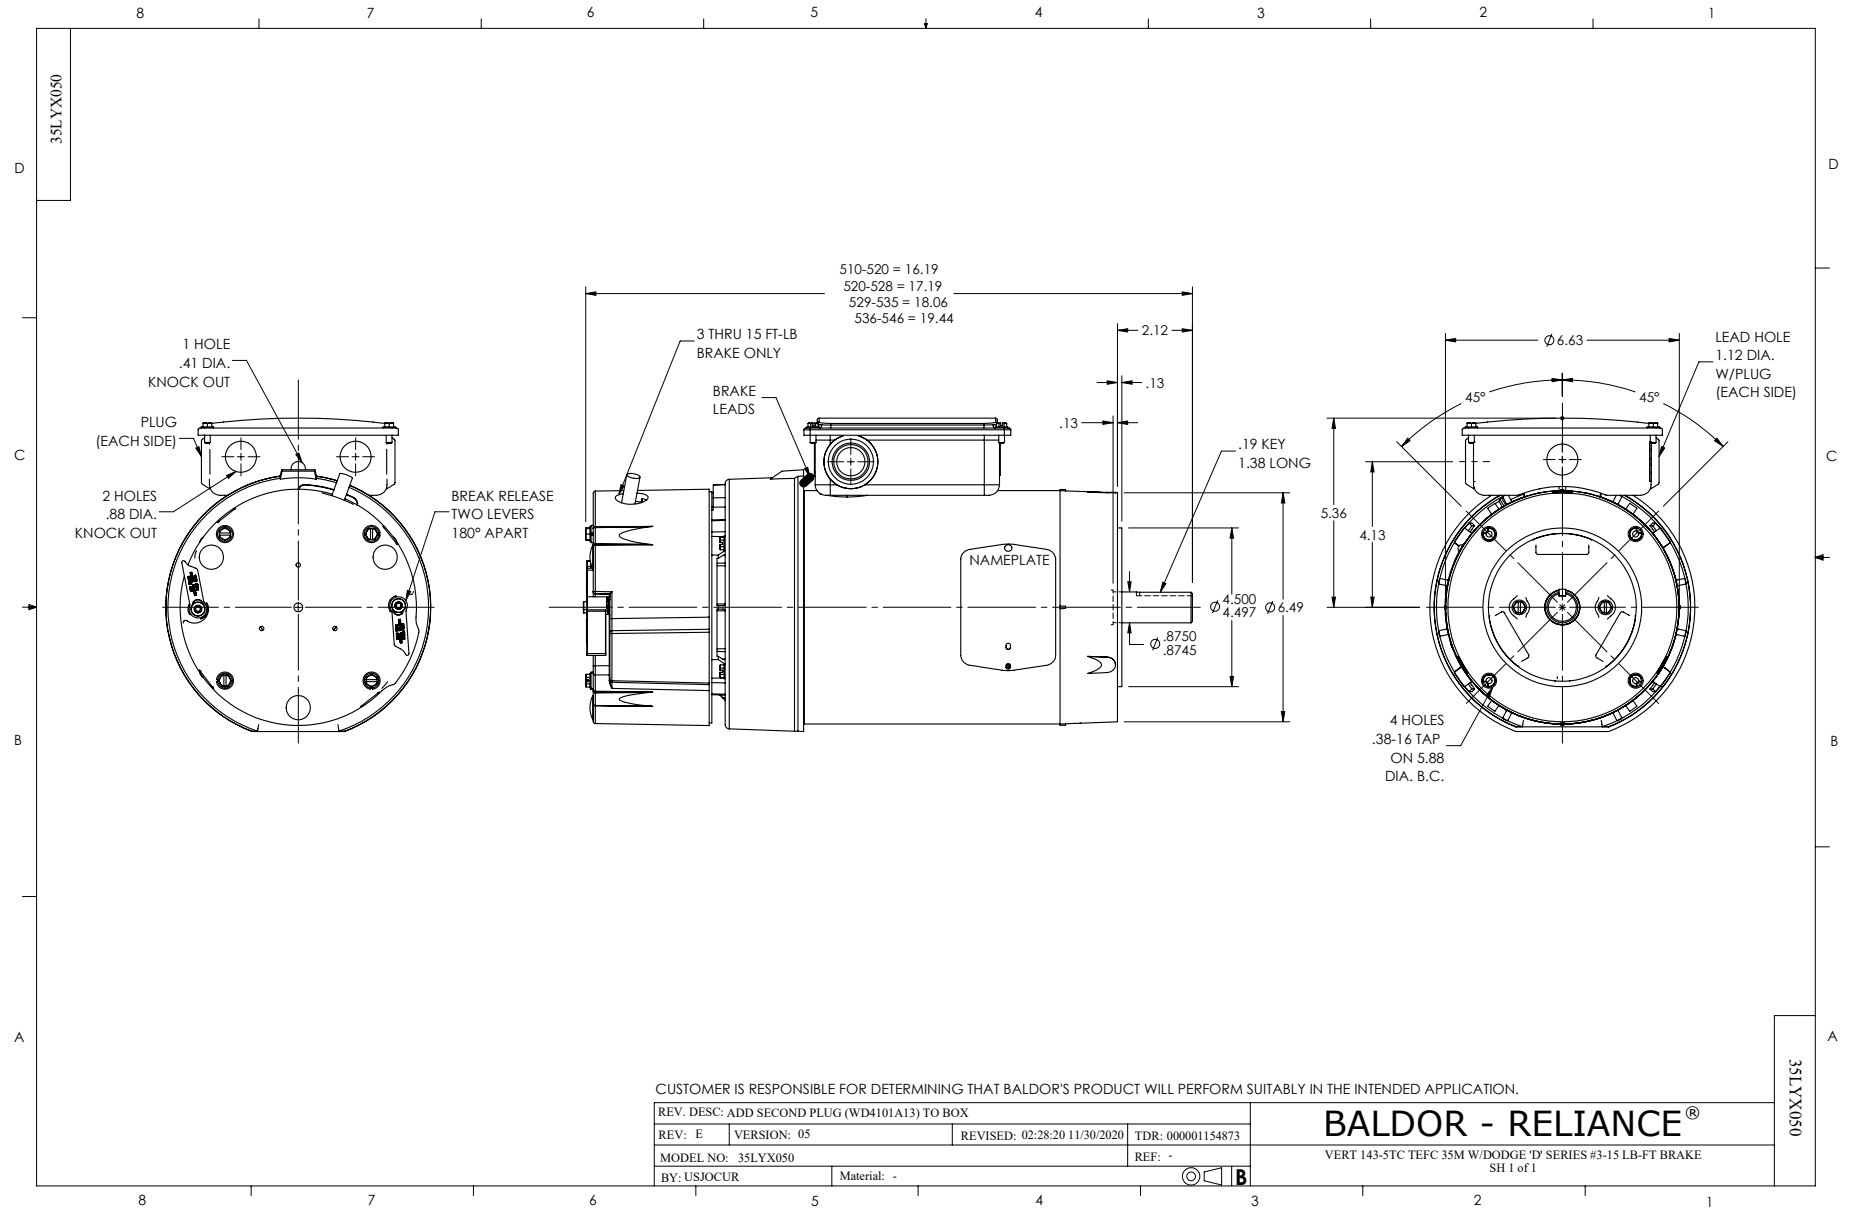

CD0006

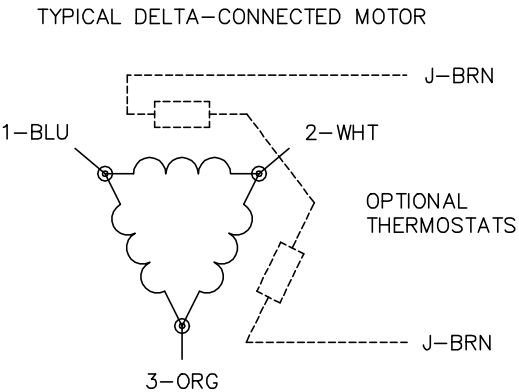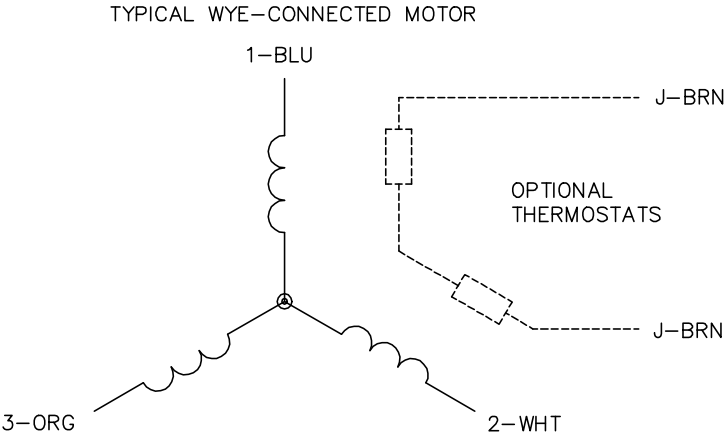

- NOTES:
1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1

CD2120

WIRING CONNECTIONS (1 PHASE VAC)

	POWER LINE A	POWER LINE B	CAP TOGETHER	CAP ALONE
AC LOW VOLT.	B1	B2	B3 & B5	B4
AC HIGH VOLT.	B1 & B5	B2	---	B3 CAP ALONE B4 CAP ALONE
DC VOLT.	B1	B2	B3 & B5	B4

B1 WHITE
 B2 BLACK
 B3 GRAY
 B4 BLUE
 B5 RED

CD2120

REV. DESC: NEW			BALDOR • DODGE • RELIANCE III
REV. LTR: -	VERSION: 00	TDR: 000000741785	
FILE: \CKA\00037\282		REVISED: 12: 28: 11 04/12/2012	D-SERIES MOTOR BRAKE 5LD AC\DC SH 1 of 1
MTL: -		BY: CKRONSO	